

Building For Life &Designing For Dream!



Qingdao Jachin Industry and Trade Co., Ltd.
WhatsApp/Wechat:+86-13668872086
E-mail: Jacky@stjachin.com



COMPANYPROFILE

公司简介

青岛雅斤工贸有限公司 是一家专注于铝合金成品整体门窗制造的工厂，本公司秉持着服务于海外建筑商，设计公司，门窗公司的经营理念，满足于海外整体门窗需求订单，接受OEM 定制，贴牌生产，成品门窗，半成品发货组装及铝合金型材，配套五金玻璃的材料供应。我们拥有一条完整的生产制造门窗流水线，自动化切割组架，自动打胶设备，冲压设备，CNC 加工中心，完全满足于客户不同的定制需求。我们的团队都是热情的年轻人，拥有创业的激情和梦想，希望能把雅斤工贸做成一家高端系统解决方案的提供商，为海外商家提供优质高效的合格铝合金门窗产品。公司主营产品系列有：内开内倒系列，内外平开窗系列，异形窗系列，提拉窗，美式手摇窗，中悬窗，折叠门，推拉门，窄边推拉门，自动磁悬浮门，幕墙系列等产品。

Qingdao Jachin Industry and Trade Co., Ltd which brand name is Jachin ,is a Specialized aluminium window and door manufacture who are focus on design ,window and door manufacturing ,and customized service for oversea builders ,designers ,window&door sellers and ending users.

Our factory can work all types of orders such as OEM Order, assembly window&door with glass installed,Half-finish window and door frame selling as well as the system aluminium profiles . Meanwhile ,we also supply our window and door system technology to our customer who are planning to building a window and door factory in locally. Not just window and door, we also offer the service for the glass,hardware accessories suggestion and solution to our customers.

Jachin factory has modernized window and door production line ,automatic cutting saw center,automatic silicone machine,CNC Center and other machines for window and door assembly .we can satisfied the different needs from our customers.

Our team is young and passion people aim to working better to make Jachin become a brand that famous on aluminium window and door system manufacturing and exporting worldwide with customer trust, qualified ,efficiency and on time delivery.

Our main product are aluminium Tilt Turn window, Crank casement window,Double and single hung window,Sliding window,special shape window ,window screen ,sliding door, casement door,bio-folding door,automatic door,huge picture fix window,awning window,French window,Bay&bow window,Outward opening window. Thermal break series and Curtain-wall with visible curtain-wall ,and invisible curtain-wall system.

CATALOGUE


目录

1. JA 50系列欧洲系统普铝-型材产品图	03
JA 50 Series European Style Non-thermal System Window and door	
2. JA 55系列欧洲系统断桥-型材产品图	17
JA 55 Series European Style Thermal break System Window and door	
3. JA 65系列欧洲系统断桥-型材产品图	33
JA 65 Series European Style Thermal break System Window and door	
4. JA 70系列欧洲系统断桥-型材产品图	49
JA 70 Series European Style Thermal break System Window and door	
5. JA 75系列欧洲系统断桥-型材产品图	66
JA 75 Series European Style Thermal break System Window and door	
6. JA 90系列欧洲系统断桥-型材产品图	83
JA 90 Series European Style Thermal break System Window and door	
7. JA 110系列断桥窗纱一体欧洲系统型材产品图	99
JA 110 Series European Style Thermal break System Window and door	
8. JA 50系列普铝-美式手摇型材产品图	107
JA 50 Series America Style Non-thermal System Crank Window	
9. JA 85系列断桥-美式手摇型材产品图	114
JA 85 Series America Style Thermal break System Crank Window	
10. JA 83系列断桥-美式提拉型材产品图	120
JA 83 Series America Style Thermal break System Double hung Window	
11. JA 76系列断桥-澳式手摇型材产品图	129
JA 76 Series Australia Style Non-thermal System Crank Window	
12. JA 80系列普铝-推拉型材产品图	138
JA 80 Series Non-thermal Sliding System Window and door	
13. JA 80H系列断桥-推拉型材产品图	146
JA 80H Series Thermal break Sliding System Window	
14. JA 100系列普铝-推拉型材产品图	154
JA 100 Series Non-thermal Sliding System Window and door	
15. JA 100H系列断桥-推拉型材产品图	168
JA 100H Series Thermal break Sliding System Window and door	
16. JA 110系列断桥-推拉型材产品图	181
JA 110 Series Thermal break Sliding System Window and door	
17. MD通用型材产品图	203
JA general profile product diagram	




技术参数 PARAMETER

型材宽度 Profile width	50mm
型材壁厚 Profile thickness	1.4mm
可视面宽度 Visible surface width	外框: 46mm / 玻璃: 73mm Frame: 46mm / Glass: 73mm
铝材标准 Aluminum standard	6063高精吸欧铝材 6063 European standard aluminum
玻璃规格 Glass specification	6+12A+6mm中空钢化玻璃 / 6mm单层钢化玻璃 6+12A+6mm double tempered glass / 6mm single tempered glass
五金品牌 Hardware brand	坚朗 / 希美克 KINLONG / CMECH
组角工艺 Angle of group technology	组角胶 撞角工艺 Adhesive corner combination
胶条材质 Strip material	EPDM汽车级密封胶条 EPDM automotive grade sealing tape
开启方式 Opening way	内开 / 外开 Inward / Outward open

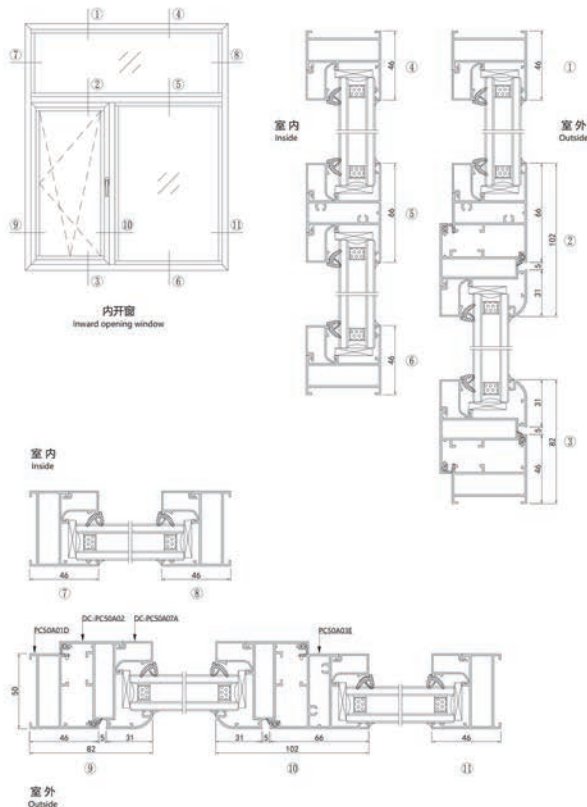

JA 50系列欧洲系统普铝型材产品图


JA50 Series European Style Non-thermal System Window and door

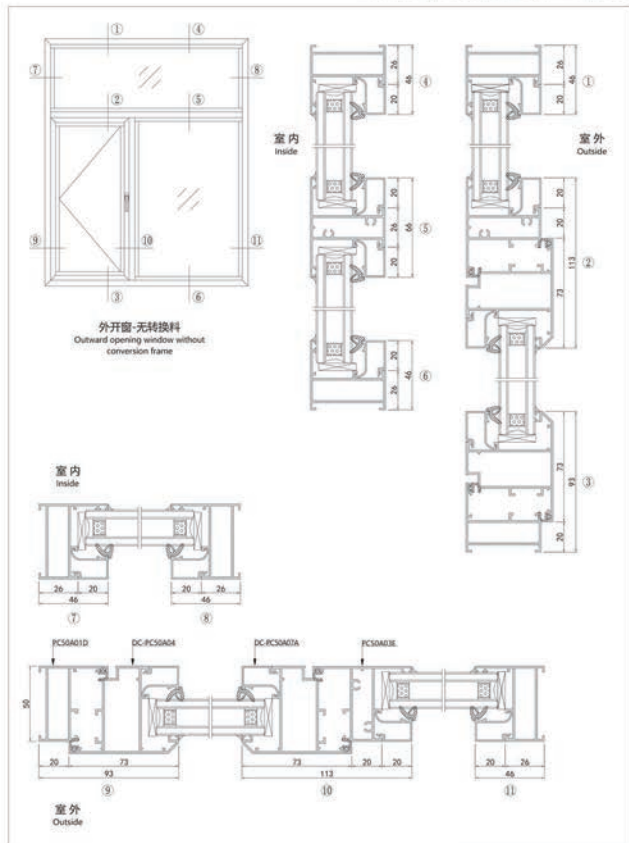

青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

JA 50系列欧洲系统普铝型材产品图


JA50 Series European Style Non-thermal System Window and door

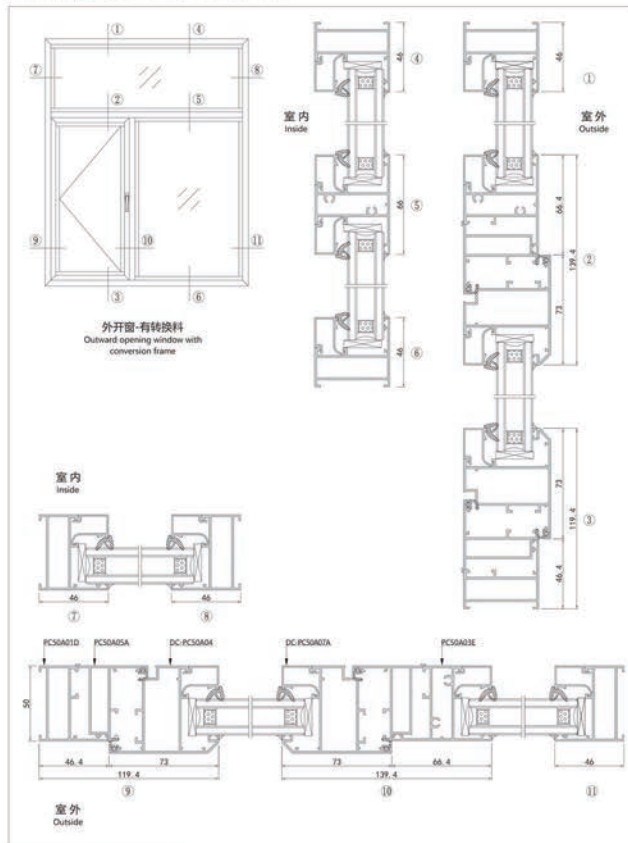

青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd


JA 50系列欧洲系统普铝型材产品图



JA 50 Series European Style Non-thermal System Window and door

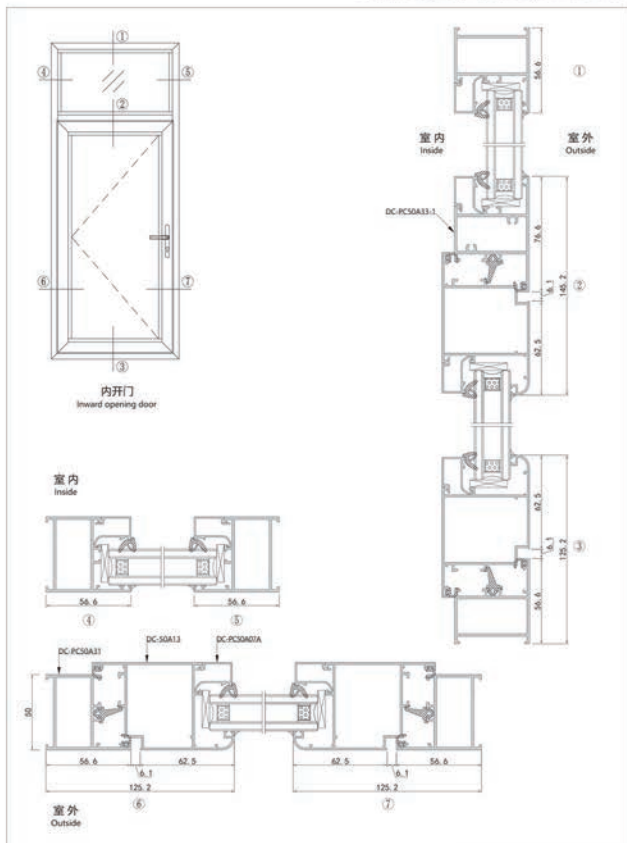

JA 50系列欧洲系统普铝型材产品图


JA 50 Series European Style Non-thermal System Window and door

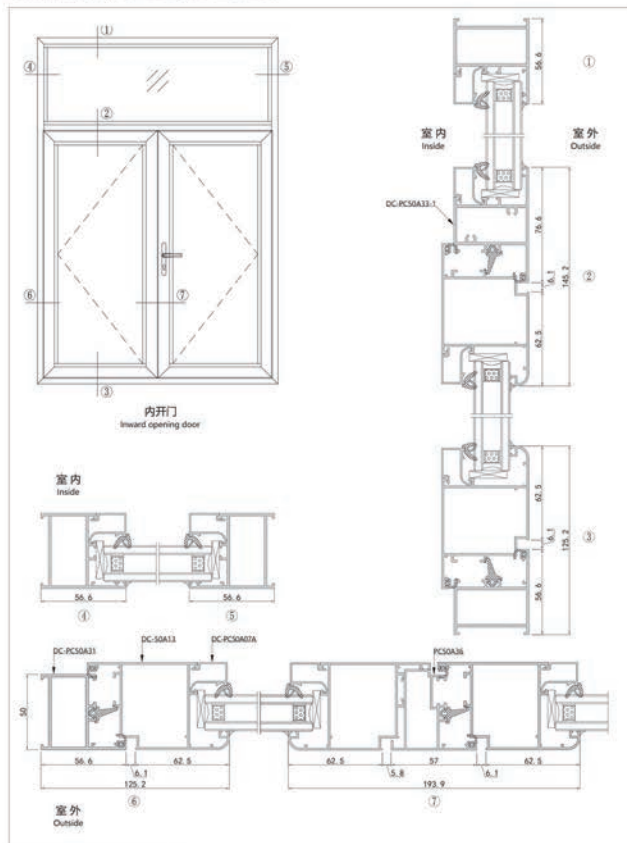

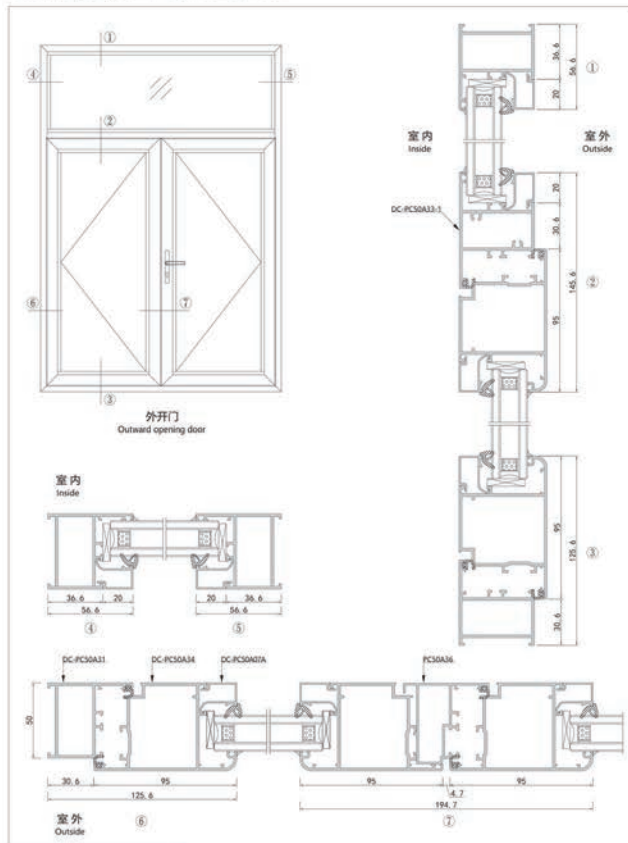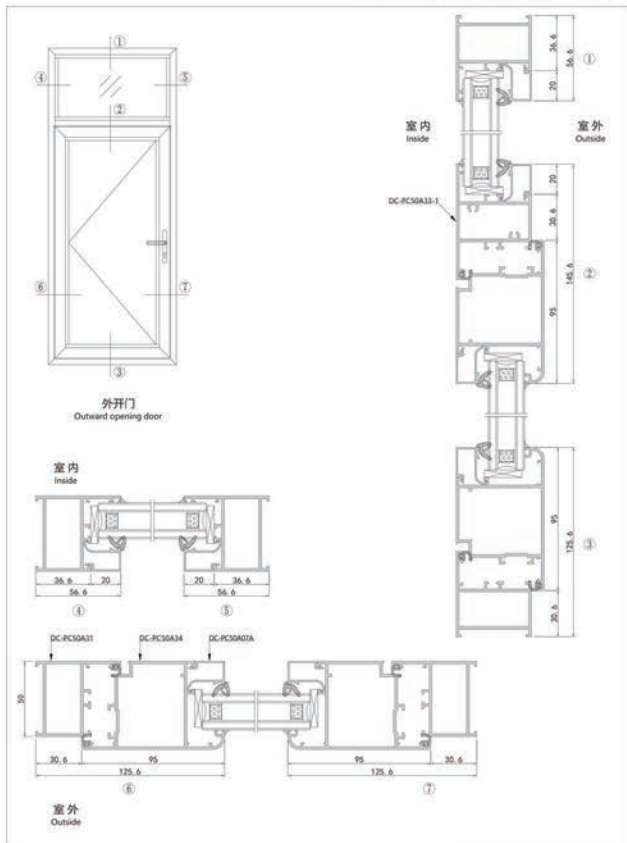










JA50系列欧洲系统普铝型材产品图


JA 50 Series European Style Non-thermal System Window and door

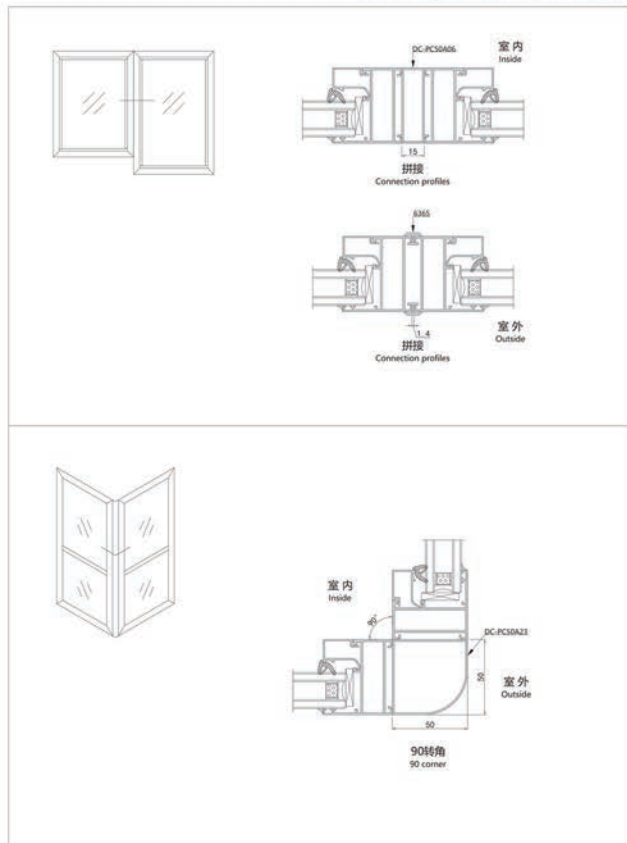

JA50系列欧洲系统普铝型材产品图


JA 50 Series European Style Non-thermal System Window and door

											
注：配角码PC50A13				注：配角码PC50A13							
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
窗框	PC50A01D	1.4mm	0.715kg/m	窗框	DC-PC50A01	1.4mm	0.741kg/m	窗中框	PC50A03E	1.4mm	0.903kg/m
											
注：配角码DC-PC50A12				注：配角码PC50A14				注：配角码DC-IM22.5			
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
窗中框	DC-PC50A03	1.4mm	0.886kg/m	内开窗扇	DC-PC50A02	1.4mm	0.906kg/m	外开窗扇	DC-PC50A04	1.4mm	1.011kg/m
											
注：配角码S0113				注：配角码DC-IM22.5							
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
转角料	PC50A05A	1.4mm	0.655kg/m	门框	DC-PC50A31	1.8mm	1.011kg/m	门中框	DC-PC50A33-1	1.8mm	1.25kg/m




注：配集現DC-63M12A

Name	Code	Thickness	Weight
内开门扇	DC-50A13	1.4mm	1.174kg/m




注：配角码DC-63M12A


Name	Code	Thickness	Weight
外开门扇	DC-PC50A34	1.8mm	1.465kg/m



Name	Code	Thickness	Weight
假中假	PCS0A36	1.4mm	0.887kg/m




Name	Code	Thickness	Weight
90°转角	DC-PC50A23	1.2mm	0.64kg/m



Name	Code	Thickness	Weight
15鋼管	DC-PC50A06	1.2mm	0.445kg/m




Name	Code	Thickness	Weight
掛条	6365	1.4mm	0.093kg/m




注: 透配6mm玻璃

Name	Code	Thickness	Weight
压线	DC-PC50A07	1.0mm	0.273kg/m




注: 选配14mm(6+1.52+6)玻璃

Name	Code	Thickness	Weight
压线	DC-GR5507	1.0mm	0.237kg/m




注: 适配24mm(6+12A+6)玻璃

Name	Code	Thickness	Weight
压线	DC-PC50A07A	1.0mm	0.213kg/m




Name	Code	Thickness	Weight
角碼	PC50A13	2.0mm	1.39kg/m




Name	Code	Thickness	Weight
角碼	PC50A14	11.5mm	2.525kg/m



Name	Code	Thickness	Weight
角码	DC-JM22.5	3.0mm	2.470kg/m



Name	Code	Thickness	Weight
角碼	50113	3mm	1.45kg/m



Name	Code	Thickness	Weight
角钢	DC-63M12A	6mm	6.25kg/m



Name	Code	Material	Weight
坡内胶条	300332-2	EPDM	



Name	Code	Material	Weight
密封胶条	300072	EPDM	



Name	Code	Material	Weight
密封胶条	300979	EPDM	



Name	Code	Material	Weight
等压胶圈	MDJT-SO-01	EPDM	


五金装配图

Hardware assembly drawing



内开窗

Inward opening window




五金装配图

Hardware assembly drawing



内开门

Inward opening door

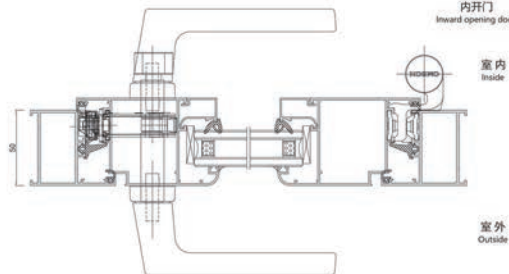


五金装配图

Hardware assembly drawing



外开窗

Outward opening window




五金装配图

Hardware assembly drawing



外悬窗

Overhanging window




五金装配图


Hardware assembly drawing



外开门


Outward opening door


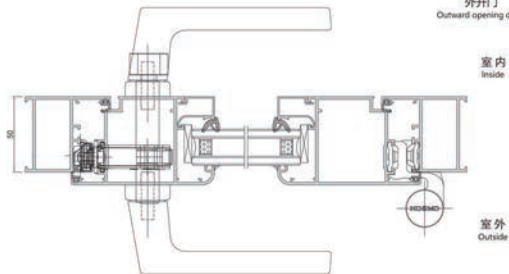



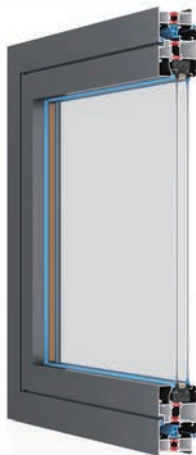


技术参数 PARAMETER

型材宽度 Profile width	55mm
型材壁厚 Profile thickness	1.4mm
可视面宽度 Visible surface width	外框: 49mm / 玻璃: 74.8mm Frame: 49mm / Glass: 74.8mm
铝材标准 Aluminum standard	6063高精级欧标铝材 6063 European standard aluminum
玻璃规格 Glass specification	6+12A+6mm中空钢化玻璃 / 6mm单层钢化玻璃 6+12A+6mm double tempered glass / 6mm single tempered glass
五金品牌 Hardware brand	室朗 / 希美克 KINLONG / CMECH
组角工艺 Angle of group technology	组角胶 撞角工艺 Adhesive corner combination
胶条材质 Strip material	EPDM汽车级密封胶条 EPDM automotive grade sealing tape
开启方式 Opening way	内开 / 外开 Inward / Outward open

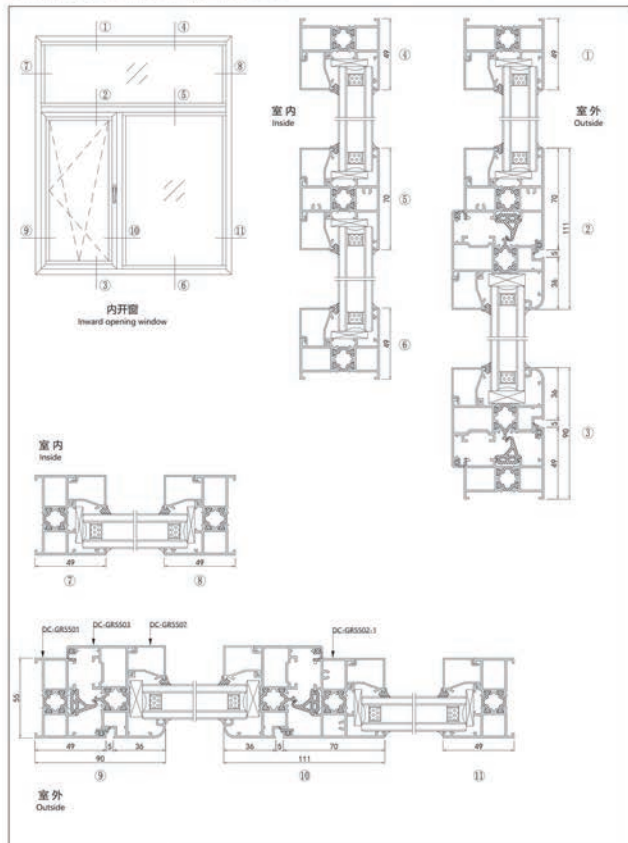


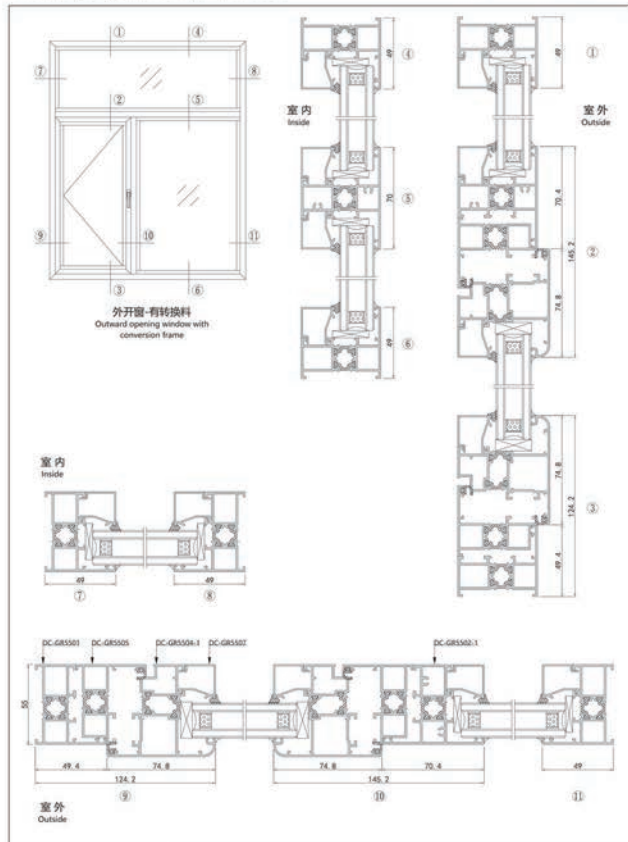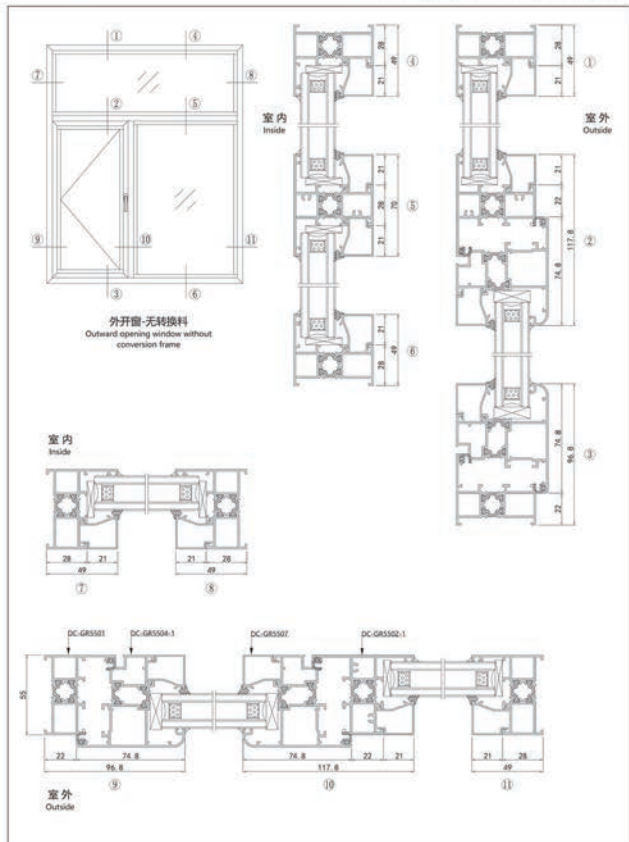

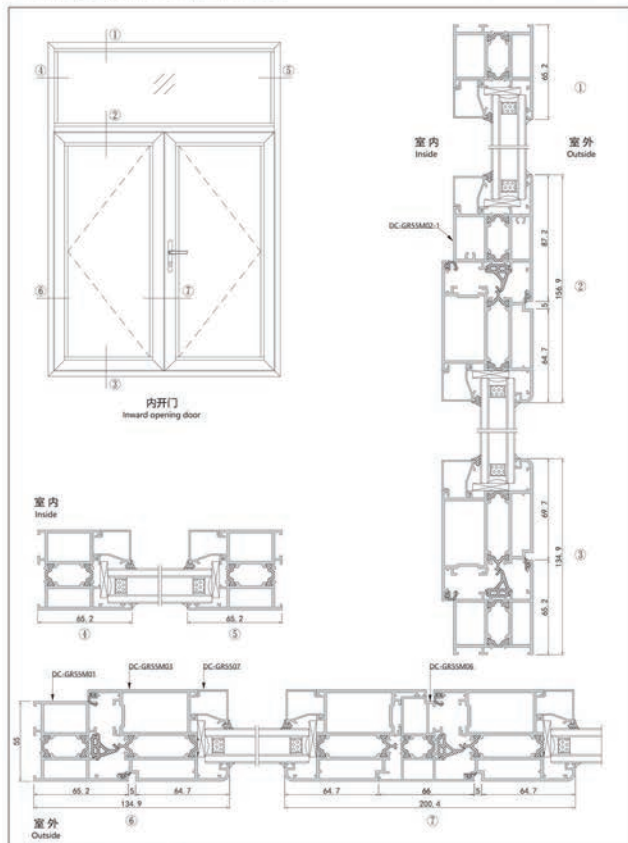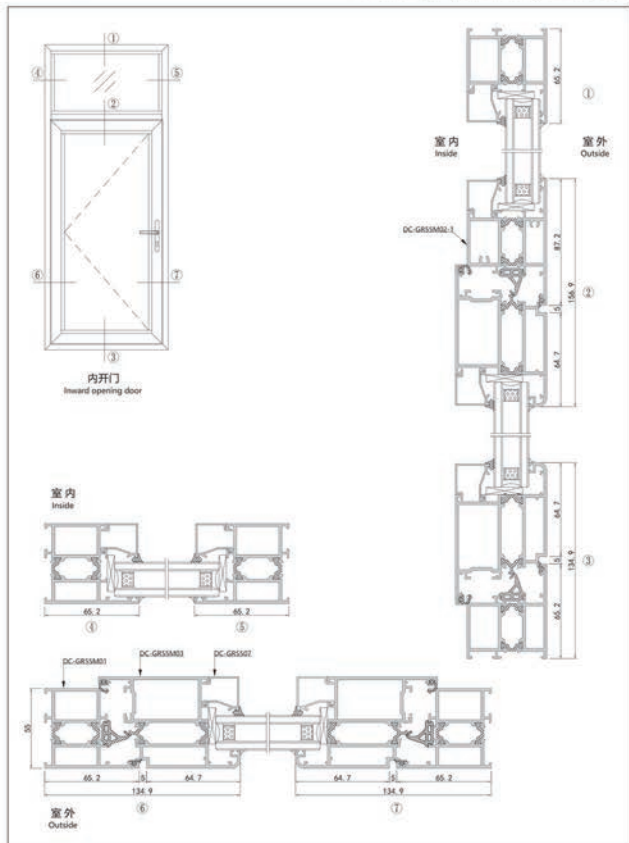


JA55系列欧洲系统断桥-型材产品图



JA 55 Series European Style Thermal break System Window and door

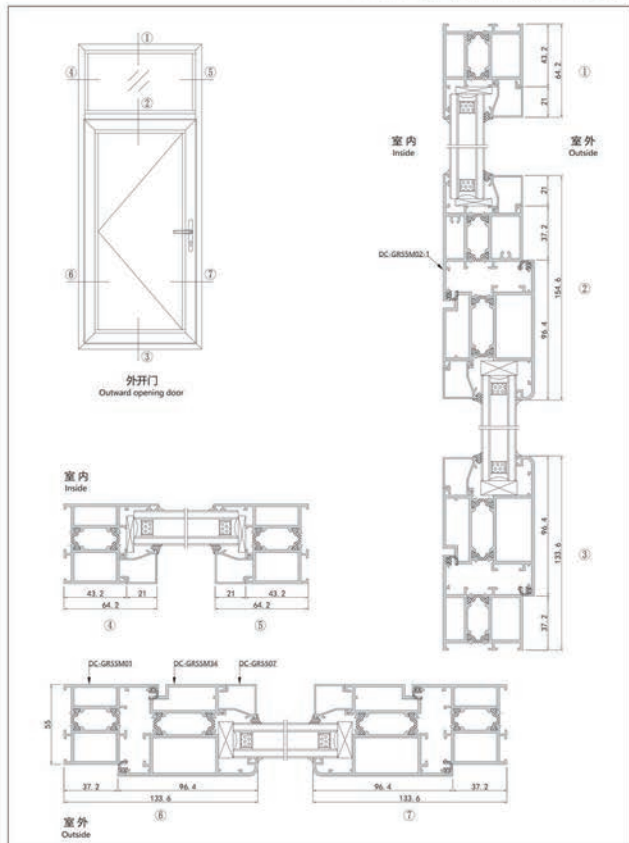

JA55系列欧洲系统断桥-型材产品图

JA 55 Series European Style Thermal break System Window and door

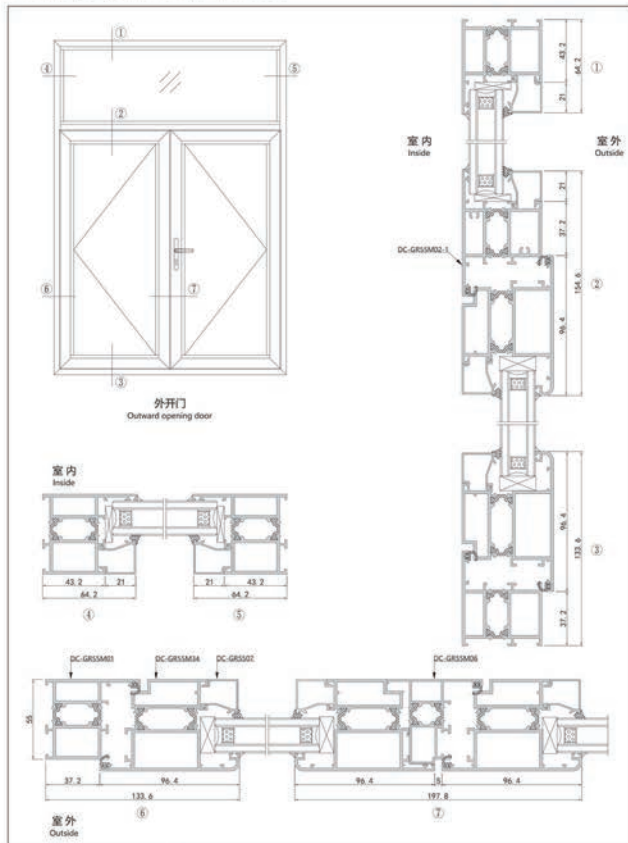

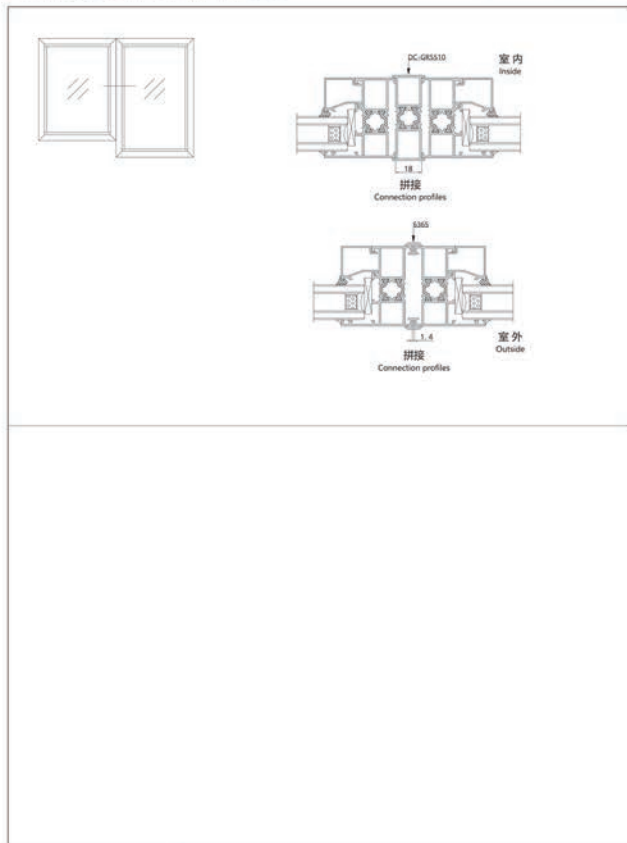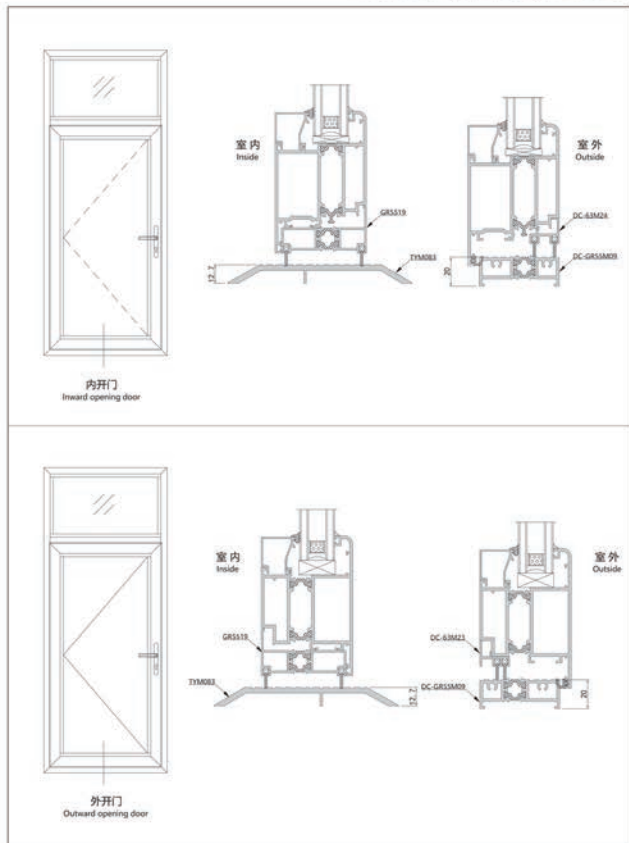

注: 适配6mm单玻				注: 适配11mm(5+0.76pvb+5)双玻				注: 适配24mm(6+12A+6)玻璃			
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
压线	DC-GR5507Z	1.0mm	0.281kg/m	压线	DC-GR5507Y	1.0mm	0.272kg/m	压线	DC-GR5507	1.0mm	0.237kg/m

Name				Name				Name			
Code				Code				Code			
Thickness				Thickness				Thickness			
Weight				Weight				Weight			
拼管	DC-GR5510	1.4mm	0.852kg/m	拼管	6365	1.4mm	0.093kg/m	角码	DC-GR5509	3.0mm	2.05kg/m

Name				Name				Name			
Code				Code				Code			
Thickness				Thickness				Thickness			
Weight				Weight				Weight			
角码	DC-YD222.6A	3.0mm	2.765kg/m	角码	DC-63M12A	6mm	6.25kg/m	角码	DC-63M12B	4mm	2.488kg/m

Name				Name				Name			
Code				Code				Code			
Material				Material				Material			
Weight				Weight				Weight			
墙内胶条	300479	EPDM		墙内胶条	301200	EPDM		密封胶条	300072	EPDM	
注: 内开窗唇密封				注: 内开门唇密封							
Name				Name				Name			
Code				Code				Code			
Material				Material				Material			
Weight				Weight				Weight			
密封胶条	300553	EPDM		密封胶条	ZY-2860-1	EPDM		等压胶条	ZY-2238	EPDM	
Name				Name				Name			
Code				Code				Code			
Material				Material				Material			
Weight				Weight				Weight			
毛刷	3.6*14			隔热条	BT14801	PA66	0.056kg/m	隔热条	BT14804	PA66	0.069kg/m


五金装配图

Hardware assembly drawing



内开窗

Inward opening window

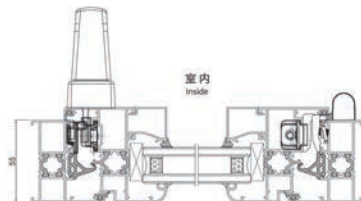

室内
Indoor

室外
Outdoor


五金装配图

Hardware assembly drawing



外开窗

Outward opening window



室内
Indoor

室外
Outdoor


五金装配图

Hardware assembly drawing



外悬窗

Overhanging window



室内
Indoor

室外
Outdoor


五金装配图

Hardware assembly drawing



内开门

Inward opening door

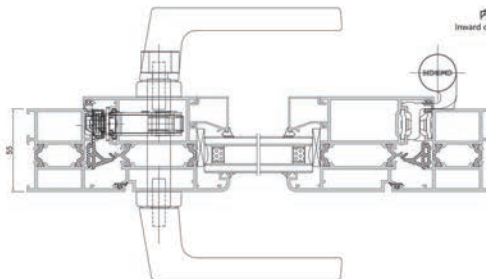

室内
Indoor

室外
Outdoor


五金装配图

Hardware assembly drawing




外开门

Outward opening door

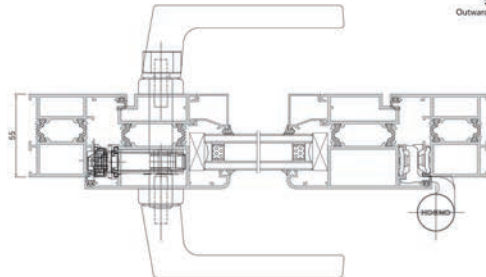


室内
Indoor

室外
Outdoor

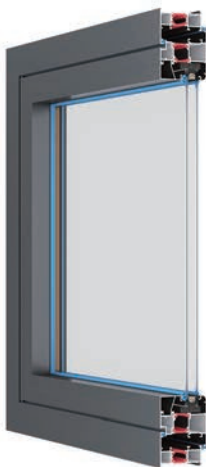


技术参数 PARAMETER

型材宽度 Profile width	65.2mm
型材壁厚 Profile thickness	1.4mm
可视面宽度 Visible surface width	外框: 49mm / 玻璃: 74.8mm Frame: 49mm / Glass fan: 74.8mm
铝材标准 Aluminum standard	6063高精吸欧铝材 6063 European standard aluminum
玻璃规格 Glass specification	5+12A+5mm中空钢化玻璃 5+12A+5mm double tempered glass
五金品牌 Hardware brand	坚朗 / 希美克 KINLONG / CMECH
组角工艺 Angle of group technology	组角胶 撞角工艺 Adhesive corner combination
胶条材质 Strip material	EPDM汽车级密封胶条 EPDM automotive grade sealing tape
开启方式 Opening way	内开 / 外开 Inward / Outward open

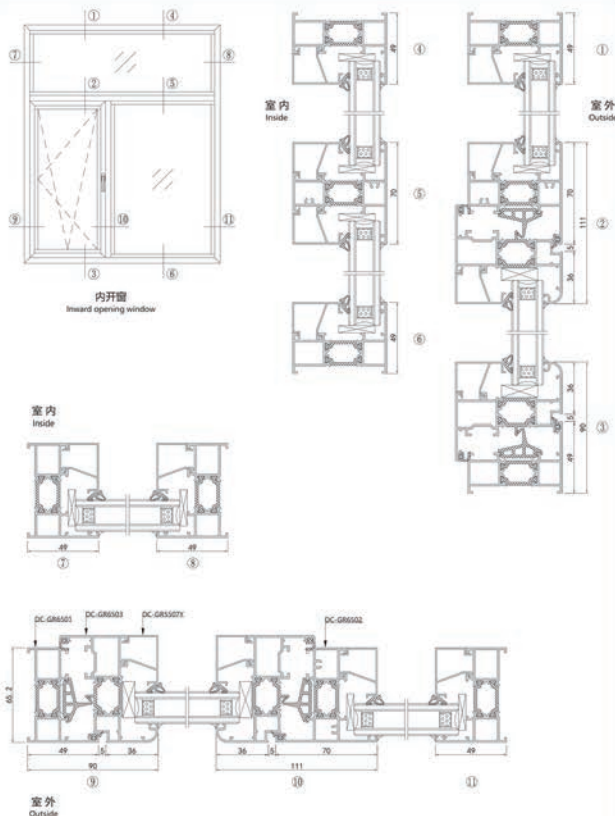


JA65系列欧洲系统断桥-型材产品图



JA 65 Series European Style Thermal break System Window and door

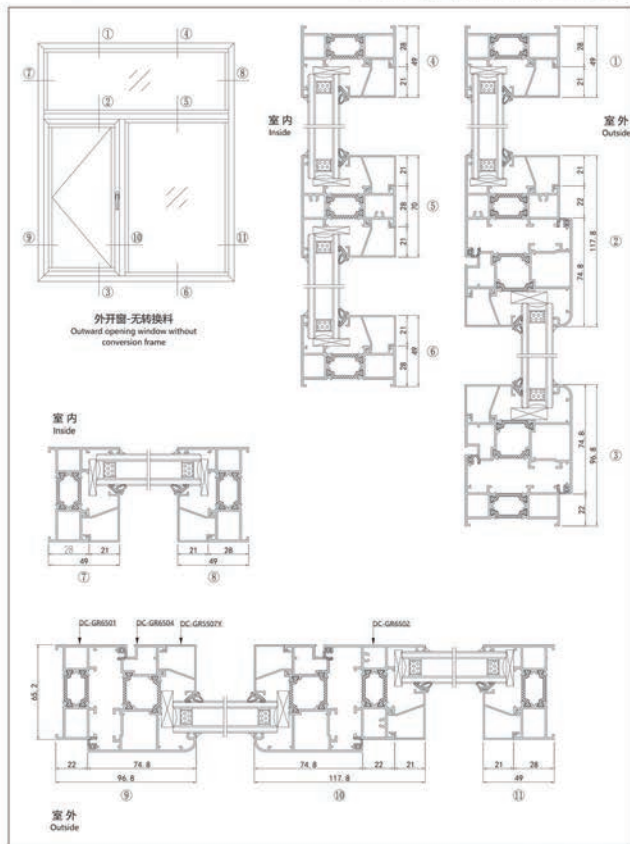

JA65系列欧洲系统断桥-型材产品图


JA 65 Series European Style Thermal break System Window and door

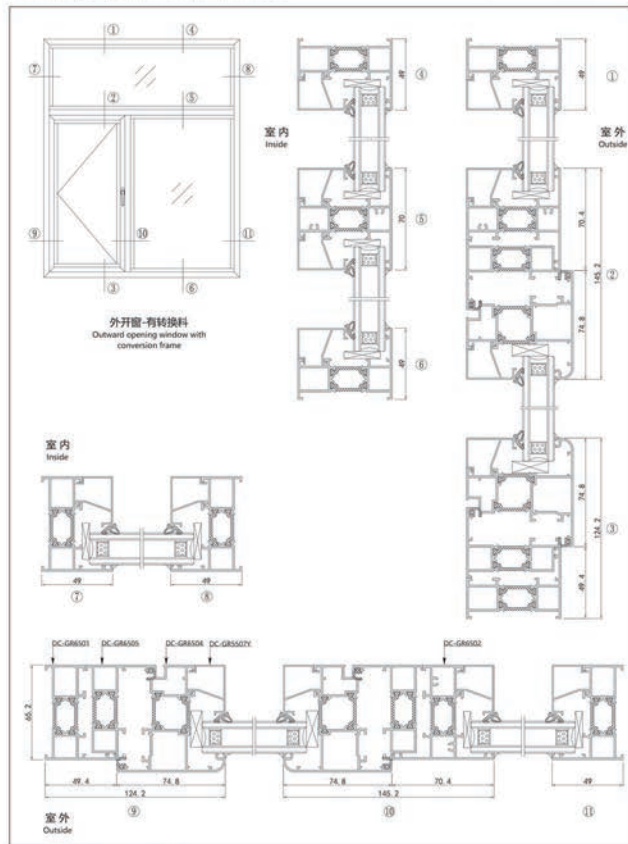

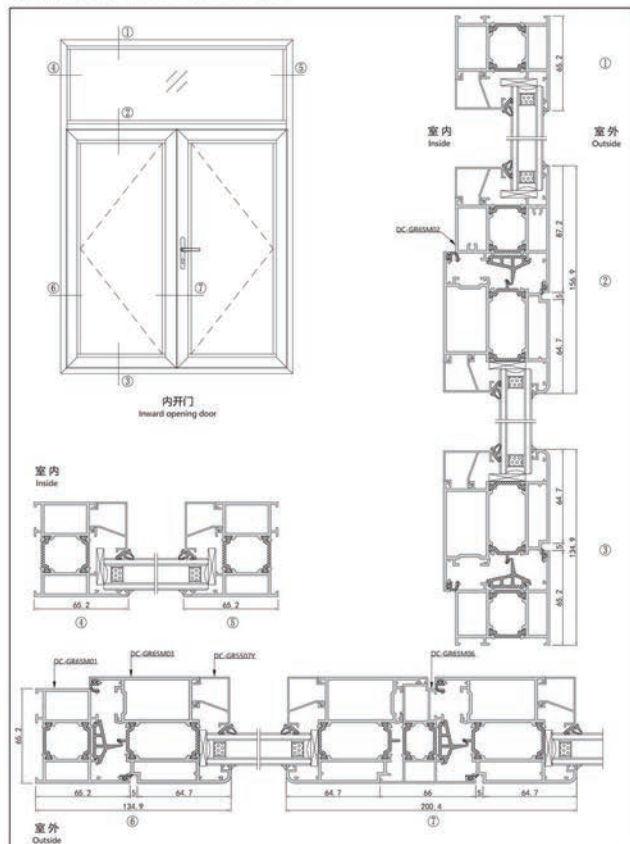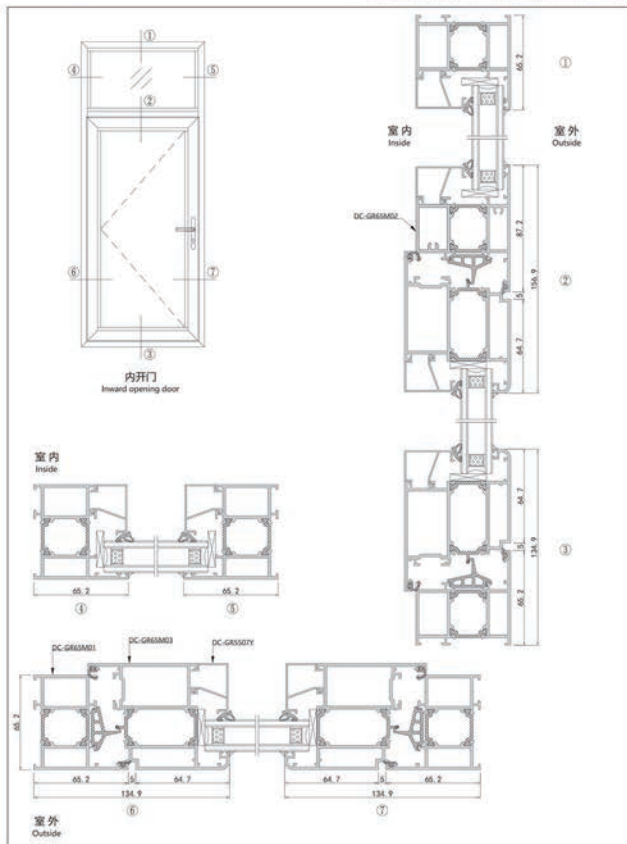


JA65系列欧洲系统断桥-型材产品图

JA65 Series European Style Thermal break System Window and door

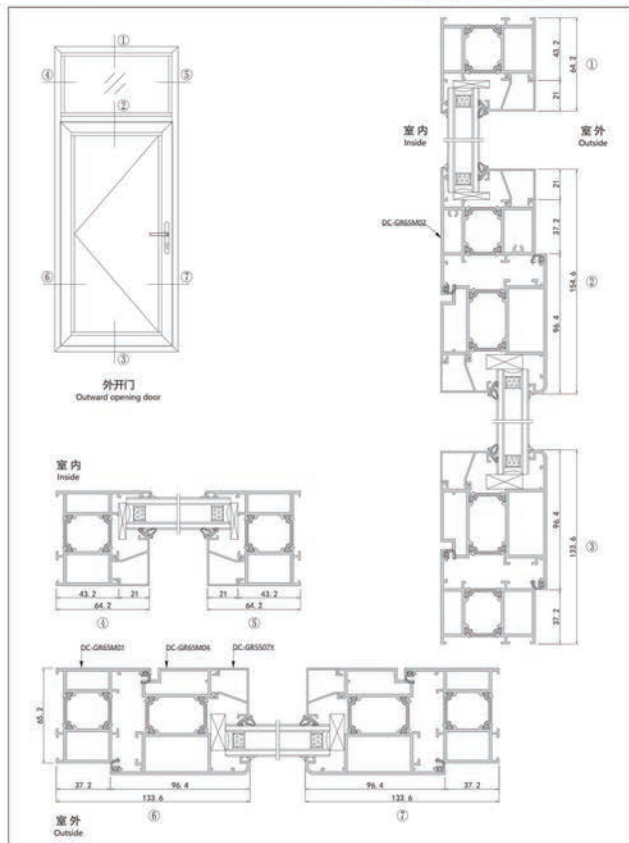


JA65系列欧洲系统断桥-型材产品图

JA65 Series European Style Thermal break System Window and door

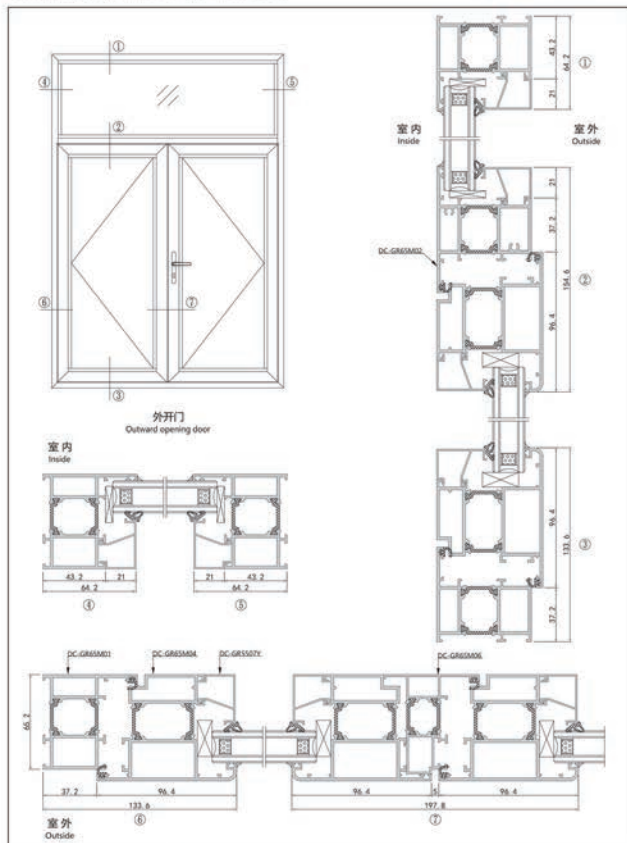


JA65系列欧洲系统断桥-型材产品图

JA 65 Series European Style Thermal break System Window and door

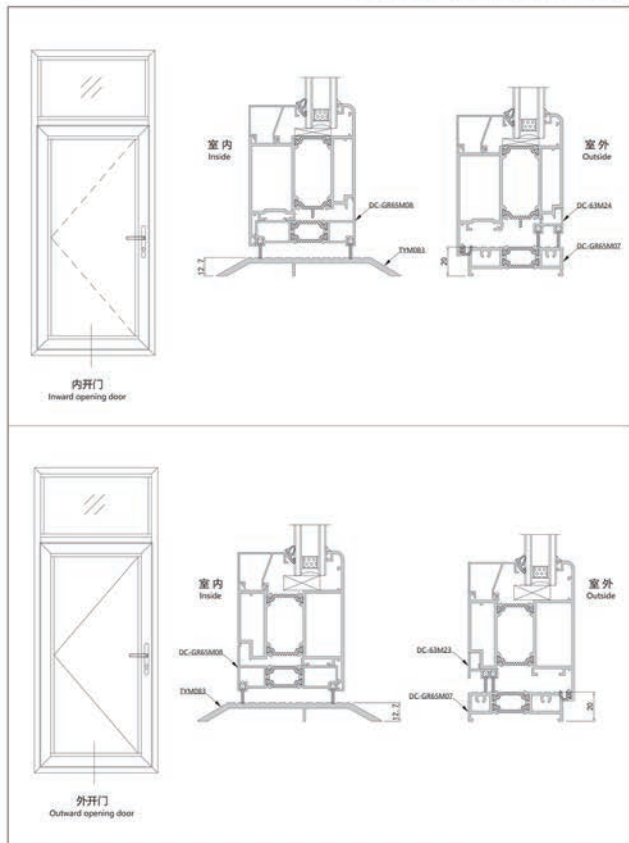

JA65系列欧洲系统断桥-型材产品图

JA 65 Series European Style Thermal break System Window and door

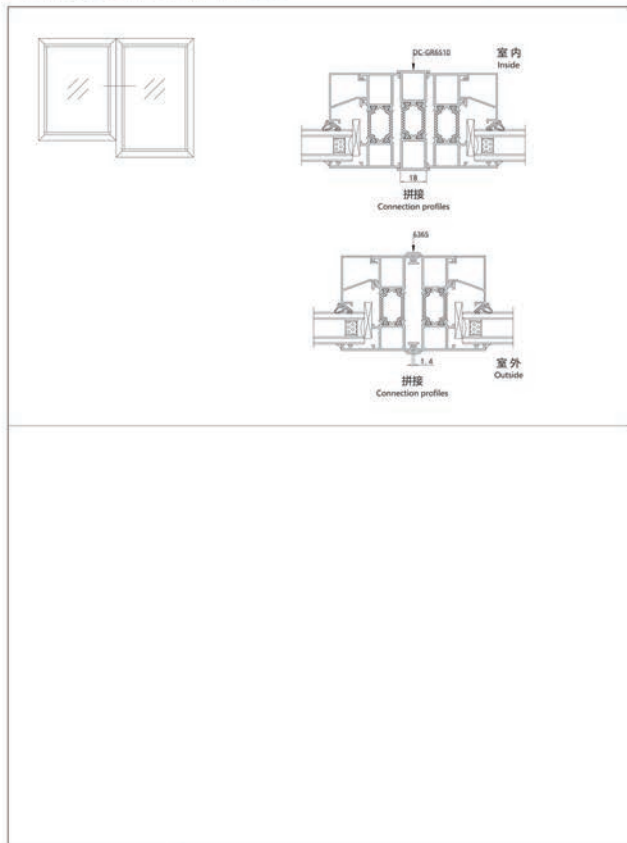

JA65系列欧洲系统断桥-型材产品图

JA 65 Series European Style Thermal break System Window and door

DC-GR5501A DC-GR5501B	DC-GR5502-1A DC-GR5502-1B	DC-GR5503A DC-GR5503B
注: A面配角码DC-GR5509 B面配角码DC-GR5509	注: A面配角码DC-GR5509 B面配角码DC-GR5509	注: A面配角码DC-GR5509 B面配角码DC-GR5509
NameCodeThicknessWeight	NameCodeThicknessWeight	NameCodeThicknessWeight
窗框DC-GR65011.4mm1.117kg/m	中挺DC-GR65021.4mm1.336kg/m	内开窗扇DC-GR65031.4mm1.351kg/m

DC-GR5504-1A DC-GR5504-1B	DC-GR5505A DC-GR5505B	DC-63M16A DC-63M18
注: A面配角码DC-YD222.6A B面配角码DC-YD222.6A	注: A面配角码DC-GR5509 B面配角码DC-GR5509	注: A面配角码DC-63M128 B面配角码DC-63M128
NameCodeThicknessWeight	NameCodeThicknessWeight	NameCodeThicknessWeight
外开窗扇DC-GR65041.4mm1.464kg/m	转换框DC-GR65051.4mm1.042kg/m	门框DC-GR65M012.0mm1.901kg/m

DC-63M16-1A DC-63M16-1B	DC-63M16A DC-63M16-2B	DC-63M18A DC-63M18B
注: A面配角码DC-63M20 B面配角码DC-63M21	注: A面配角码DC-63M12A B面配角码DC-63M12A	注: A面配角码DC-63M12A B面配角码DC-63M12A
NameCodeThicknessWeight	NameCodeThicknessWeight	NameCodeThicknessWeight
门中挺DC-GR65M022.0mm1.97kg/m	加强中挺DC-GR65M02-22.0mm2.378kg/m	内开内关门扇DC-GR65M032.0mm2.317kg/m

JA65系列欧洲系统断桥-型材产品图

JA 65 Series European Style Thermal break System Window and door


DC-63M34A DC-63M34B	DC-63M17A DC-63M17B	DC-63M14A DC-63M14B
注: A面配角码DC-63M12A B面配角码DC-63M12A	注: A面配角码DC-GR5509 B面配角码DC-GR5509	
NameCodeThicknessWeight	NameCodeThicknessWeight	NameCodeThicknessWeight
外开内扇DC-GR65M042.0mm2.253kg/m	转换框DC-GR65M051.4mm1.056kg/m	假中挺DC-GR65M061.4mm1.268kg/m
DC-63M22A DC-63M22B	17.2 20.3	17.2 20.3
NameCodeThicknessWeight	NameCodeThicknessWeight	NameCodeThicknessWeight
门框DC-GR65M072.0mm1.101kg/m	外开内扇转动DC-63M231.2mm0.2kg/m	内开内扇转动DC-63M241.2mm0.219kg/m
GR5519B GR5519A	83.8 127 12.2	
NameCodeThicknessWeight	NameCodeThicknessWeight	
低门扇DC-GR65M081.3mm0.895kg/m	低门扇TYM0833.8mm1.273kg/m	

注: 适配13mm(6+0.76pvb+6)玻璃				注: 适配22mm(5+12A+5)玻璃				注: 适配33mm(5+9A+5+9A+5)玻璃			
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
压线	DC-GR5507Z	1.0mm	0.281kg/m	压线	DC-GR5507Y	1.0mm	0.272kg/m	压线	DC-GR5507	1.0mm	0.237kg/m
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
拼管	DC-GR6510	1.4mm	0.911kg/m	拼管	6365	1.4mm	0.093kg/m	角码	DC-GR5509	3.0mm	2.05kg/m
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
角码	DC-YD222.6A	3.0mm	2.765kg/m	角码	DC-63M12A	6mm	6.25kg/m	角码	DC-63M12B	4mm	2.488kg/m

注: 内开内倒密封				注: 内开内倒密封				注: 内开内倒密封			
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
密封胶条	ZY-2064	EPDM		密封胶条	300072	EPDM		密封胶条	300553	EPDM	
注: 内开内倒密封				注: 内开内倒密封				注: 内开内倒密封			
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
密封胶条	ZY-2860-1	EPDM		等压胶条	ZY-2238	EPDM		毛刷	3.6*14		
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
隔热条	BT2503	PA66	0.085kg/m	隔热条	BT2504	PA66	0.097kg/m				


JA65系列欧洲系统断桥-型材产品图


JA65 Series European Style Thermal break System Window and door

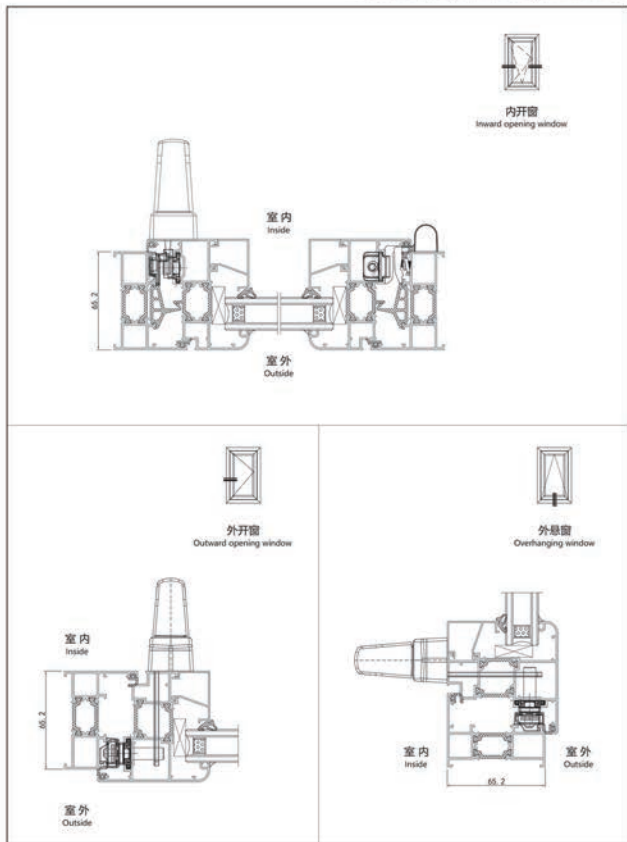

JA65系列欧洲系统断桥-型材产品图


JA65 Series European Style Thermal break System Window and door


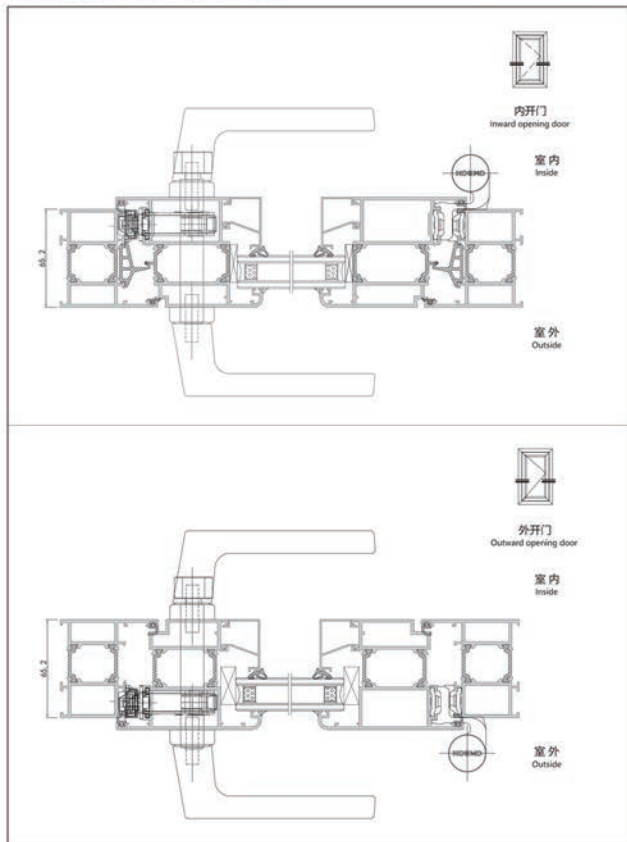



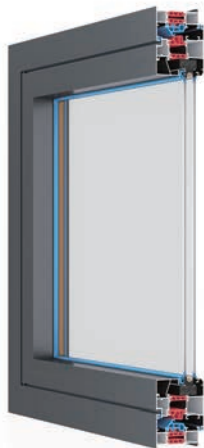




技术参数 PARAMETER

型材宽度 Profile width	70.2mm
型材壁厚 Profile thickness	1.4mm
可视面宽度 Visible surface width	外框: 49mm / 玻璃: 74.8mm Frame: 49mm / Glass fan: 74.8mm
铝材标准 Aluminum standard	6063高精级欧标铝材 6063 European standard aluminum
玻璃规格 Glass specification	5+12A+5mm中空钢化玻璃 / 5+12A+5+12A+5mm中空钢化玻璃 5+12A+5mm double tempered glass / 5+12A+5+12A+5mm triple tempered glass
五金品牌 Hardware brand	坚朗 / 希美克 KINLONG / CMECH
组角工艺 Angle of group technology	组角胶 撞角工艺 Adhesive corner combination
胶条材质 Strip material	EPDM汽车级密封胶条 EPDM automotive grade sealing tape
开启方式 Opening way	内开 / 外开 Inward / Outward open

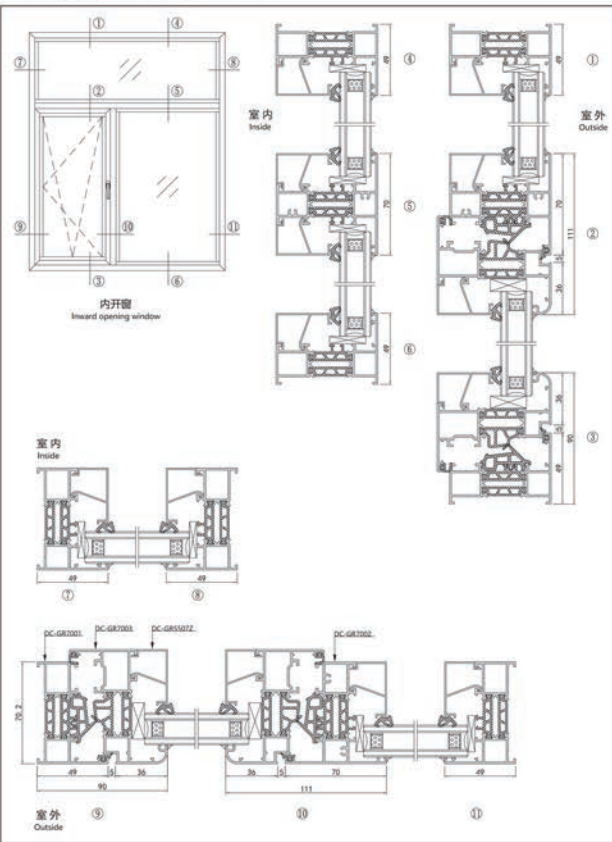

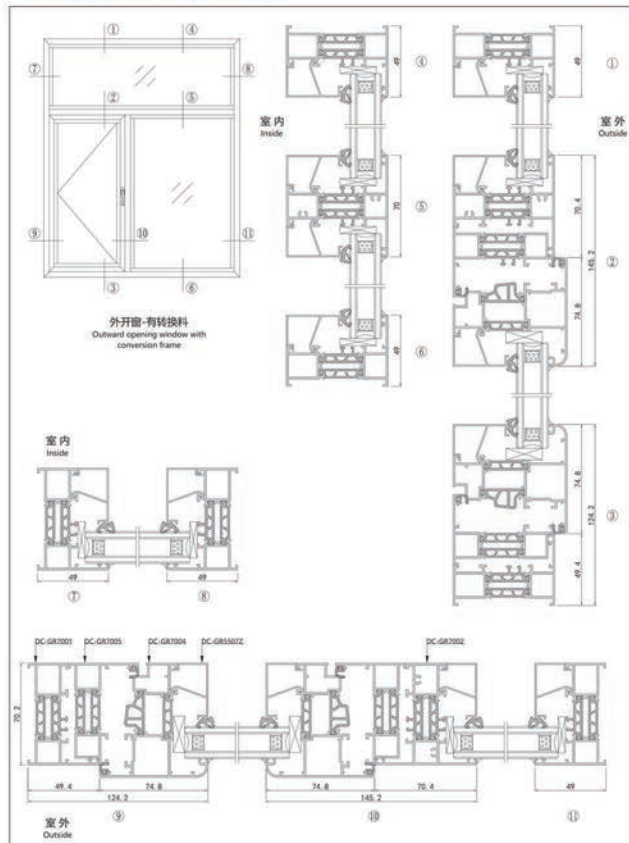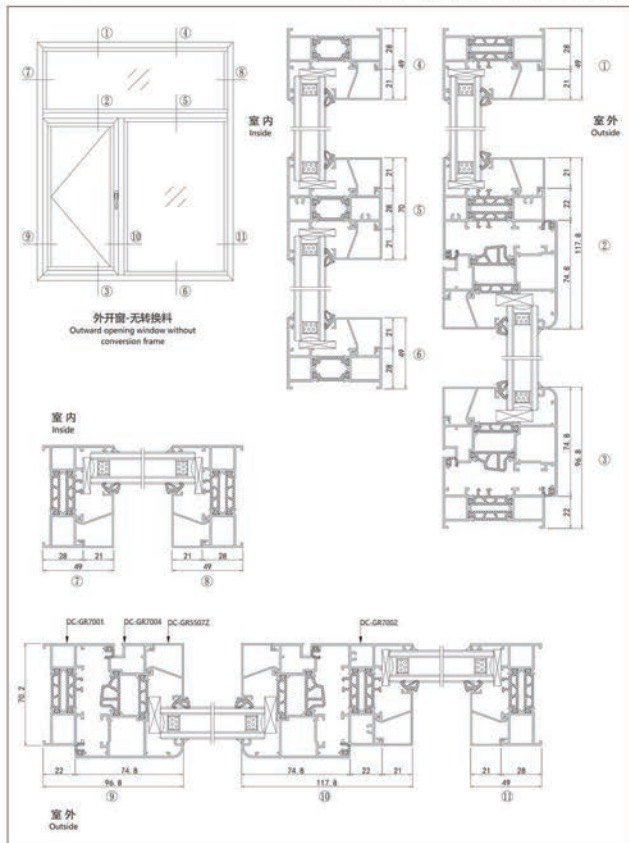


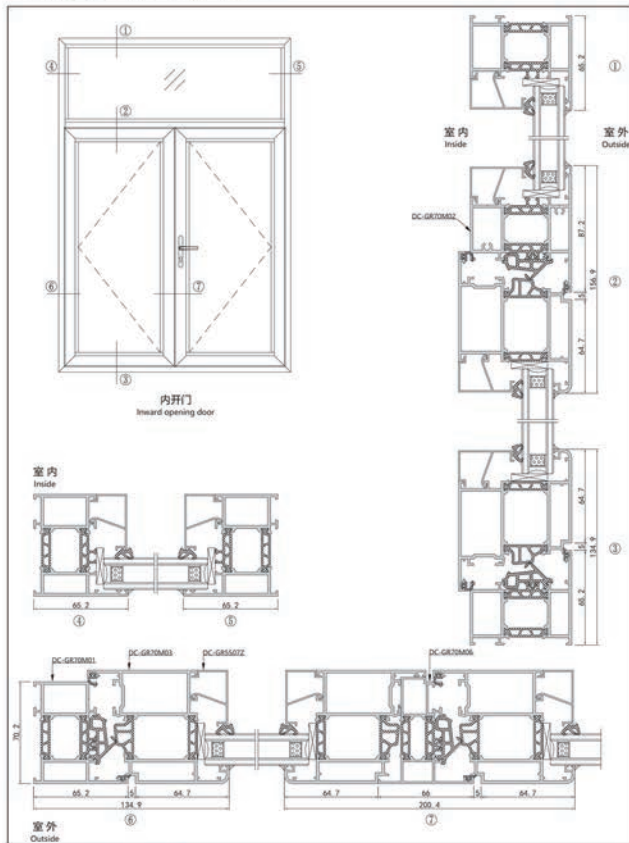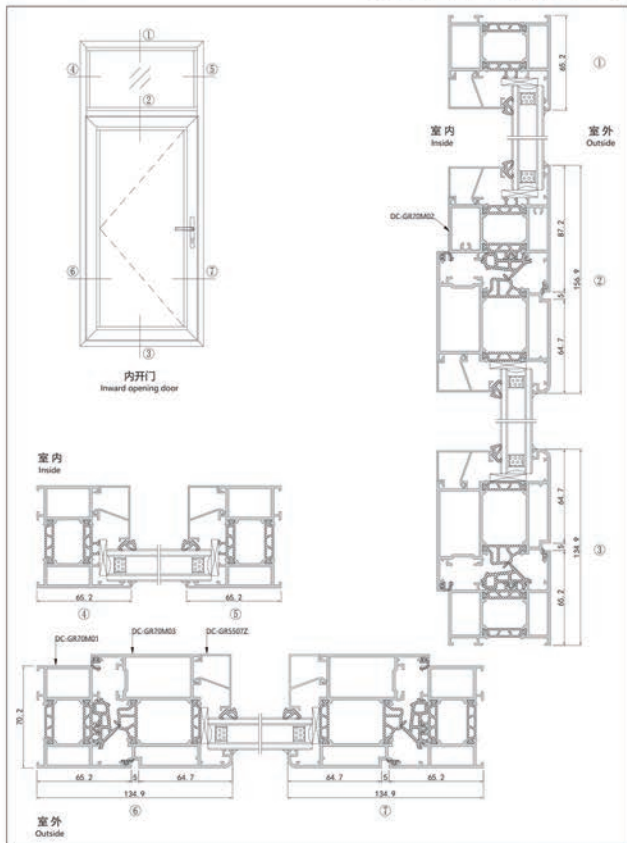

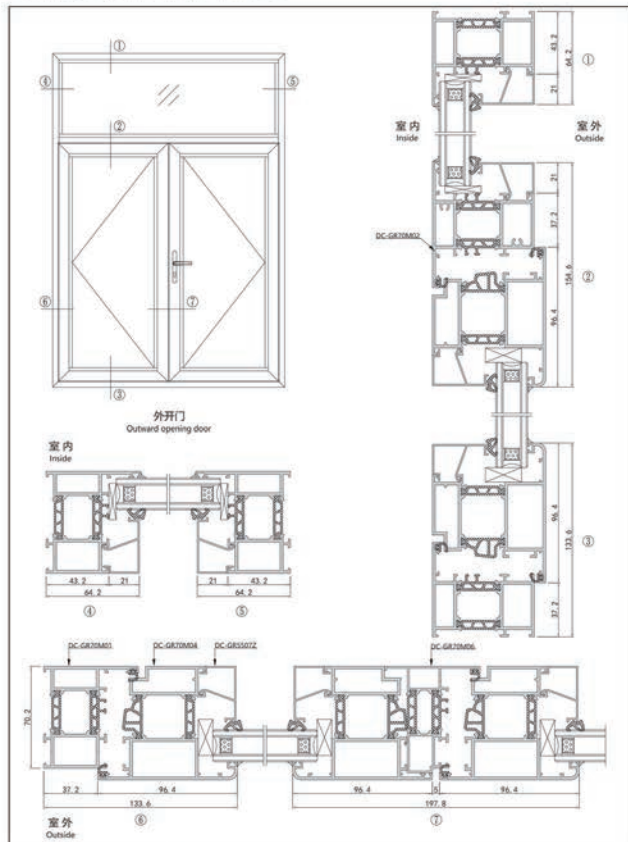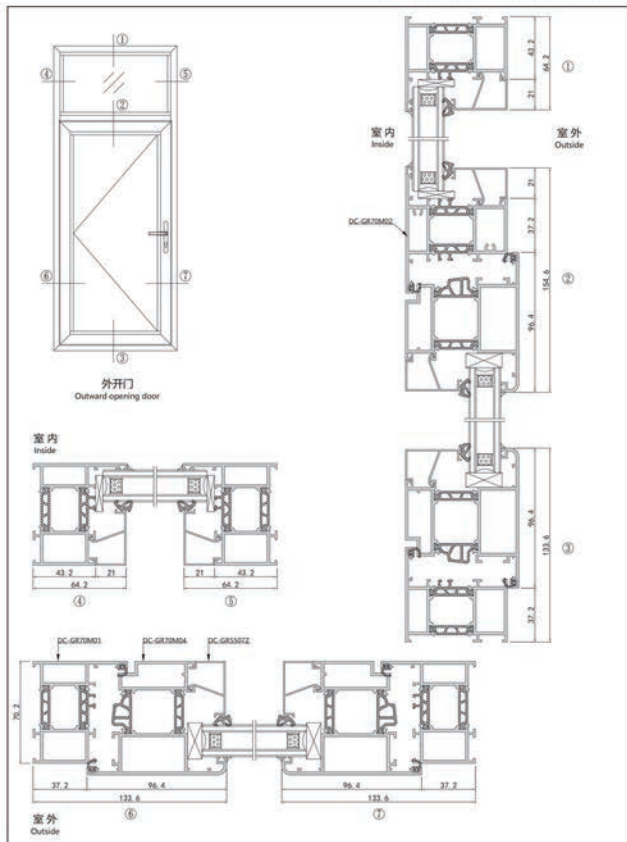


JA70系列欧洲系统断桥-型材产品图

JA 70 Series European Style Thermal break System Window and door

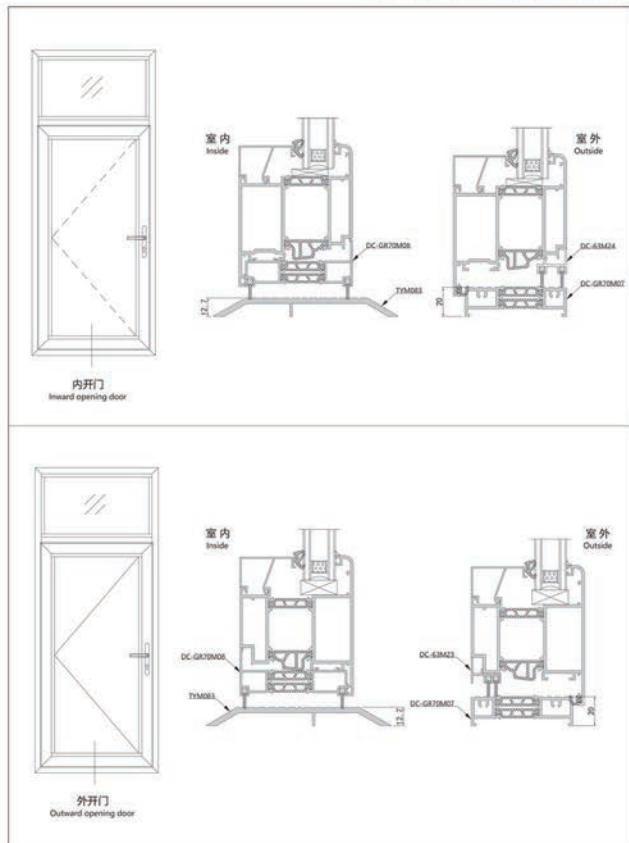

JA70系列欧洲系统断桥-型材产品图

JA 70 Series European Style Thermal break System Window and door

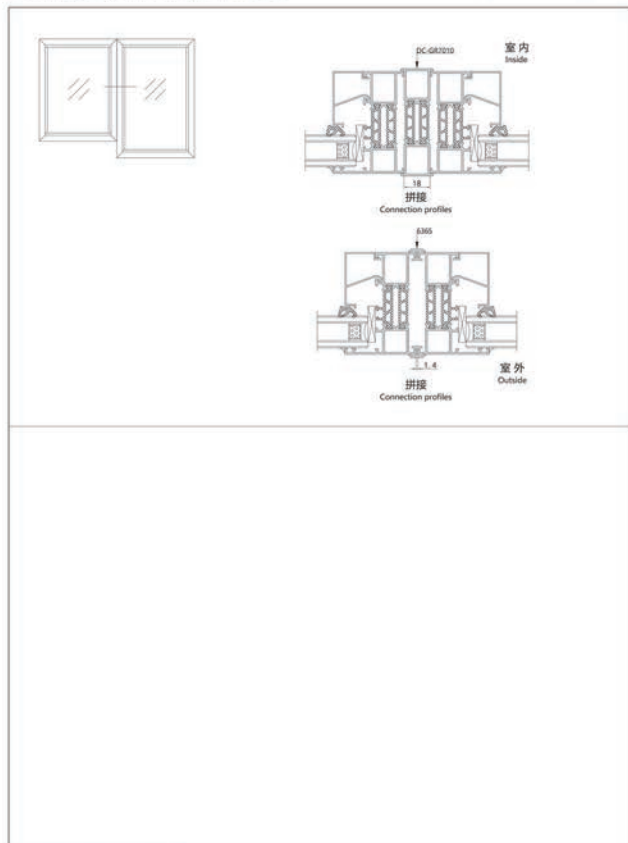

JA70系列欧洲系统断桥-型材产品图

JA70 Series European Style Thermal break System Window and door

注: A面配角码DC-GR5509 B面配角码DC-GR5509				注: A面配角码DC-GR5509 B面配角码DC-GR5509				注: A面配角码DC-GR5509 B面配角码DC-GR5509			
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
窗框	DC-GR7001	1.4mm	1.231kg/m	中框	DC-GR7002	1.4mm	1.469kg/m	内开窗扇	DC-GR7003	1.4mm	1.469kg/m
注: A面配角码DC-YD222.6A B面配角码DC-YD222.6A				注: A面配角码DC-GR5509 B面配角码DC-GR5509				注: A面配角码DC-63M12B B面配角码DC-63M12B			
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
外开窗扇	DC-GR7004	1.4mm	1.582kg/m	转接框	DC-GR7005	1.4mm	1.138kg/m	门框	DC-GR70M01	2.0mm	2.015kg/m
注: A面配角码DC-63M20 B面配角码DC-63M21				注: A面配角码DC-63M12A B面配角码DC-63M12A							
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
门中框	DC-GR70M02	2.0mm	2.103kg/m	加强中框	DC-GR70M02-2	2.0mm	2.511kg/m	内开内关门扇	DC-GR70M03	2.0mm	2.435kg/m

JA70系列欧洲系统断桥-型材产品图

JA70 Series European Style Thermal break System Window and door

注: A面配角码DC-63M12A B面配角码DC-63M12A				注: A面配角码DC-GR5509 B面配角码DC-GR5509							
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
外开内扇	DC-GR70M04	2.0mm	2.382kg/m	转接框	DC-GR70M05	1.4mm	1.152kg/m	假中框	DC-GR70M06	1.4mm	1.382kg/m
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
门扇	DC-GR70M07	2.0mm	1.197kg/m	外开内扇转接	DC-63M23	1.2mm	0.2kg/m	内开内扇转接	DC-63M24	1.2mm	0.219kg/m
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
低门扇 低门框	DC-GR70M08	1.3mm	0.991kg/m	低门框	TYM083	3.8mm	1.273kg/m				

注: 适配22mm(5+12A+5)玻璃				注: 适配26mm(5+0.76+5+9A+5)玻璃				注: 适配39mm(5+12A+5+12A+5)玻璃			
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
压线	DC-GR5507Z	1.0mm	0.281kg/m	压线	DC-GR5507Y	1.0mm	0.272kg/m	压线	DC-GR5507	1.0mm	0.237kg/m
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
拼管	DC-GR7010	1.4mm	1.007kg/m	拼条	6365	1.4mm	0.093kg/m	角码	DC-GR5509	3.0mm	2.05kg/m
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
角码	DC-YD222.6A	3.0mm	2.765kg/m	角码	DC-63M12A	6.0mm	6.25kg/m	角码	DC-63M12B	4.0mm	2.488kg/m

								注: 内开窗密封			
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
密封胶条	300653	EPDM		密封胶条	300072	EPDM		密封胶条	300553	EPDM	
								注: 内开门窗密封			
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
密封胶条	ZY-2860-1	EPDM		等压胶条	MDJT-70-01	EPDM		等压胶条	MDJT-70-02	EPDM	
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
毛刷	3.6*14			隔热条	BT3013	PA66	0.133kg/m	隔热条	BT3014	PA66	0.152kg/m




Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
隔热条	BT3006	PA66	0.167kg/m								

Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight


Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight




内开窗
Inward opening window

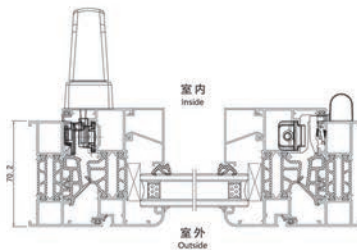

外开窗
Outward opening window

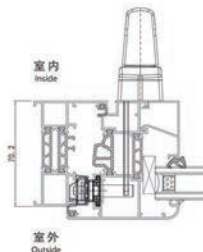


外悬窗
Overhanging window

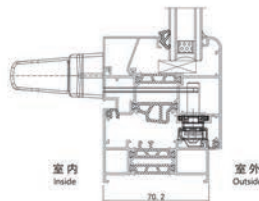

JA70系列欧洲系统断桥-型材产品图

JA70 Series European Style Thermal break System Window and door

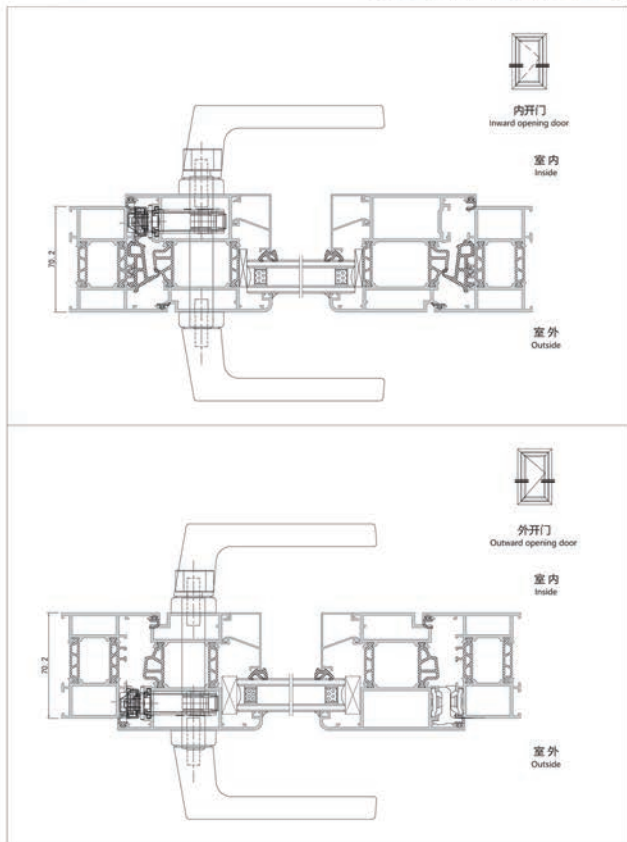

青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

JA75系列欧洲系统断桥-型材产品图



JA75 Series European Style Thermal break System Window and door





技术参数 PARAMETER

型材宽度 Profile width	74.7mm
型材壁厚 Profile thickness	1.8mm
可视面宽度 Visible surface width	外框: 64.7mm / 玻璃: 74.7mm Frame: 64.7mm / Glass fan: 74.7mm
铝材标准 Aluminum standard	6060T66超高精级欧标铝材 6060T66 European standard aluminum
玻璃规格 Glass specification	5+20A+5mm中空钢化玻璃 / 5+12A+5+12A+5中空钢化玻璃 5+20A+5mm double tempered glass / 5+12A+5+12A+5 triple tempered glass
五金品牌 Hardware brand	OTA / 好博 OTA / HOPPE
组角工艺 Angle of group technology	撞角销钉注胶双重工艺 Double process of adhesive injection for Angle pin.
胶条材质 Strip material	EPDM汽车级密封胶条 EPDM automotive grade sealing tape
开启方式 Opening way	内开 / 外开 Inward / Outward open


青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

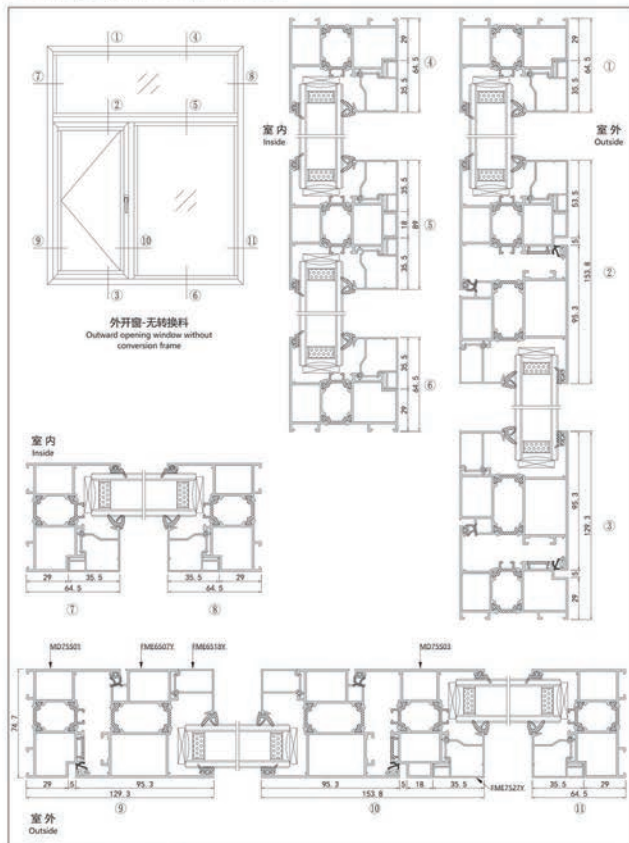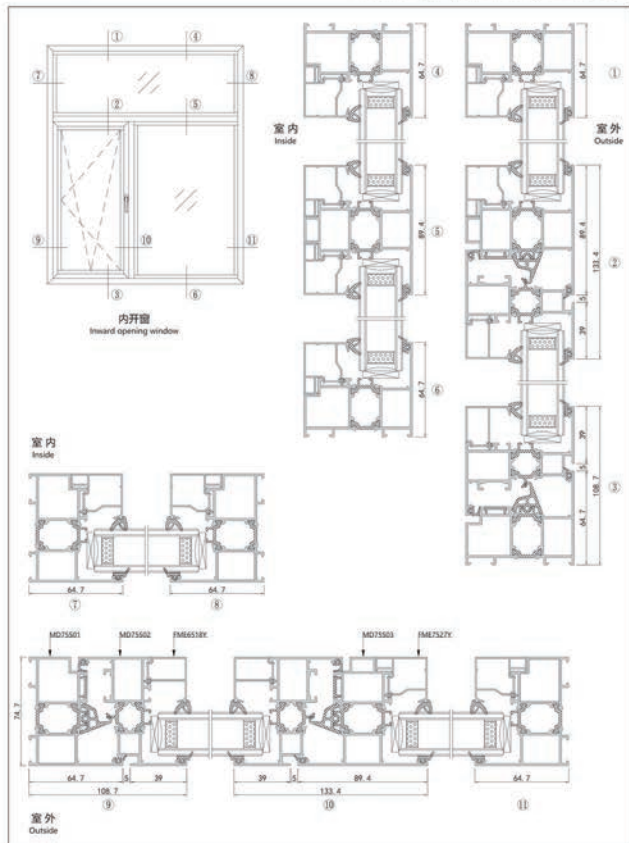

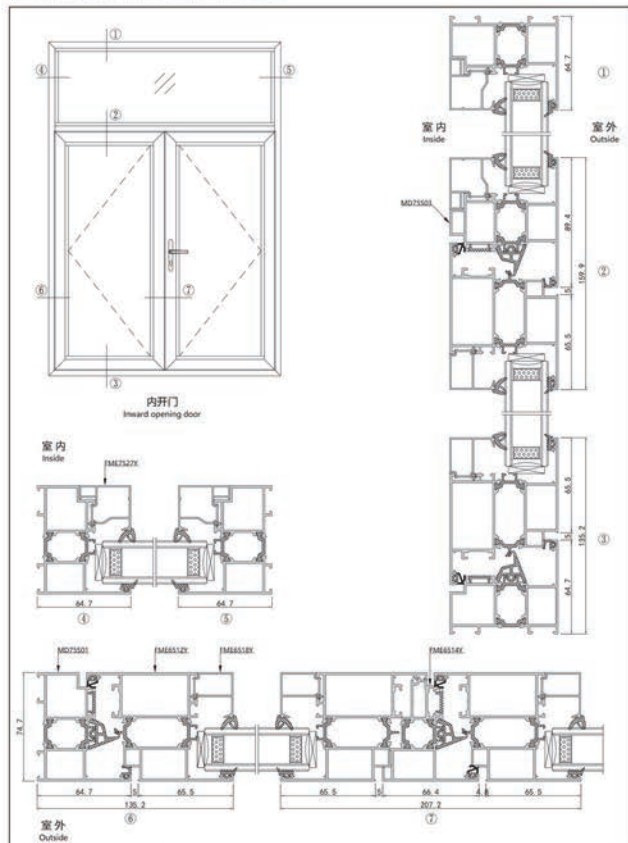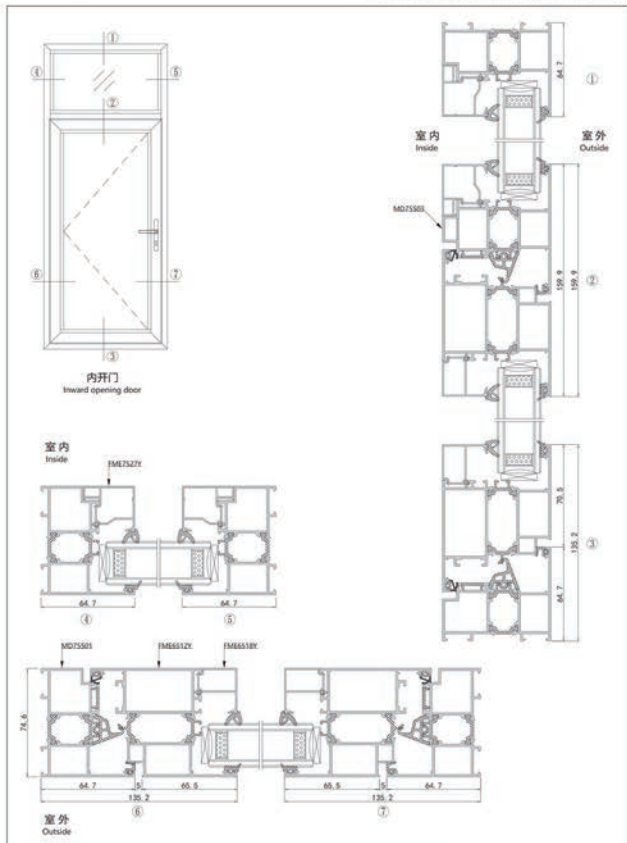


JA75系列欧洲系统断桥-型材产品图

JA75 Series European Style Thermal break System Window and door

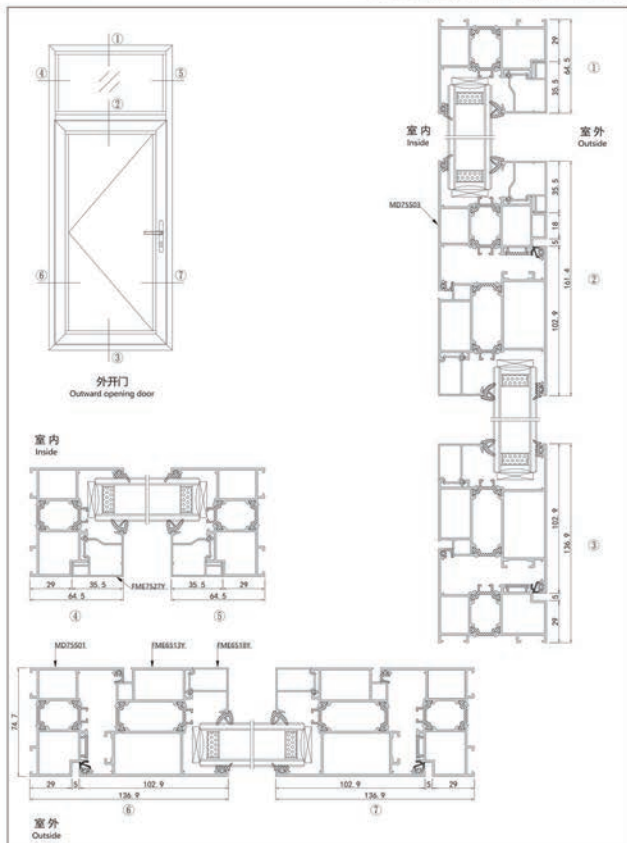


JA75系列欧洲系统断桥-型材产品图

JA75 Series European Style Thermal break System Window and door

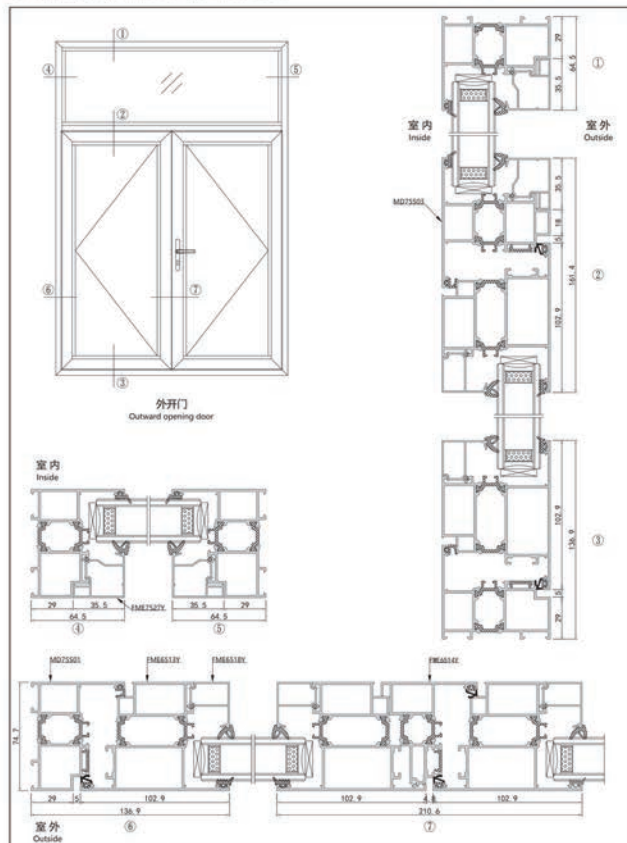


JA75系列欧洲系统断桥-型材产品图

JA75 Series European Style Thermal break System Window and door

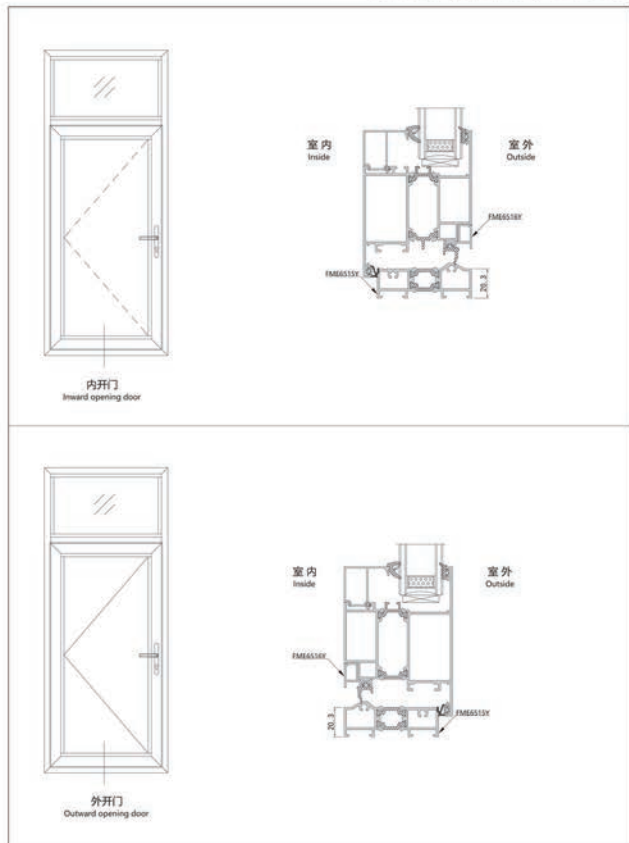

JA75系列欧洲系统断桥-型材产品图

JA75 Series European Style Thermal break System Window and door

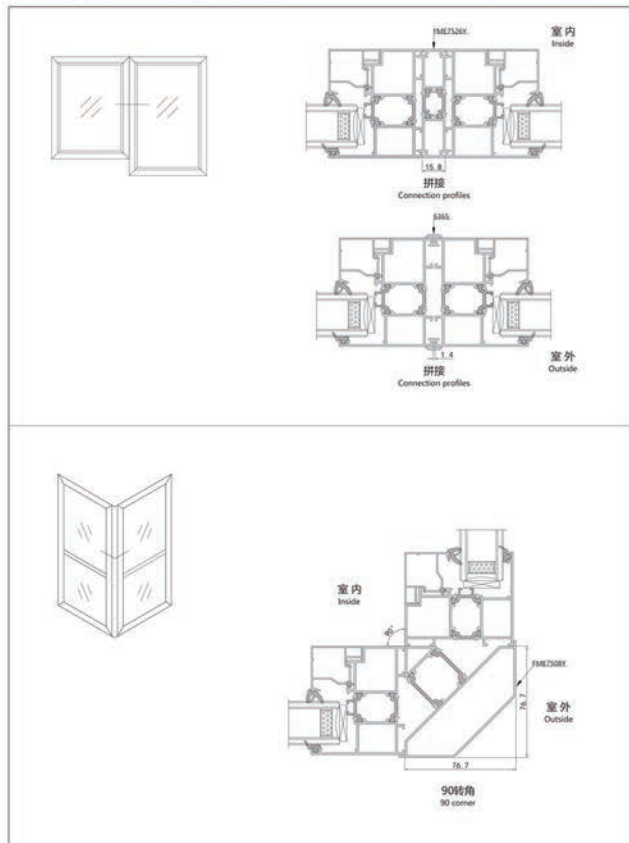

JA75系列欧洲系统断桥-型材产品图


JA75 Series European Style Thermal break System Window and door



135°转角
135 corner


JA75系列欧洲系统断桥-型材产品图

JA75 Series European Style Thermal break System Window and door




注: A面配角码JM75Y-17
B面配角码JM65-01

Name	Code	Thickness	Weight
边码	MD75S01	1.5mm	1.54kg/m




注: A面配连接件JM65-05
B面配连接件JM65-04

Name	Code	Thickness	Weight
中挺	MD75S03	1.5mm	1.69kg/m




Name	Code	Thickness	Weight
假中挺	FME6514Y	1.5mm	1.319kg/m




注: A面配角码JM65-09
B面配角码JM65-08

Name	Code	Thickness	Weight
内开窗扇	MD75S02	1.5mm	1.495kg/m




注: A面配角码FMEJM-37.6
B面配角码FMEJM-26.7

Name	Code	Thickness	Weight
外开窗扇	FME6507Y	1.5mm	1.811kg/m




注: A面配角码W1008
B面配角码W6203

Name	Code	Thickness	Weight
内开内扇	FME6512Y	1.5mm	1.927kg/m



注: A面配角码W6203
B面配角码FMEJM-33.2


Name	Code	Thickness	Weight
外开内扇	FME6513Y	1.5mm	1.928kg/m



Name	Code	Thickness	Weight
恒门框	FME6515Y	1.5mm	1.033kg/m




Name	Code	Thickness	Weight
门框封边	FME6516Y	1.2mm	0.201kg/m

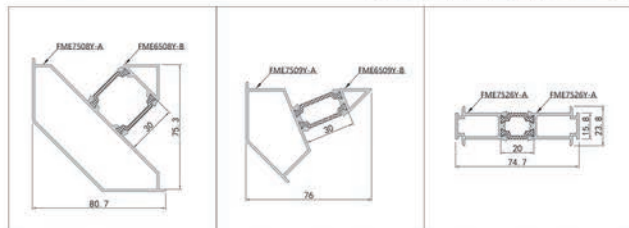

Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
------	------	-----------	--------	------	------	-----------	--------	------	------	-----------	--------

90转角	FME7508Y	1.5mm	1.605kg/m	135转角	FME7509Y	1.5mm	1.179kg/m	拼管	FME7526Y	1.5mm	1.01kg/m
------	----------	-------	-----------	-------	----------	-------	-----------	----	----------	-------	----------

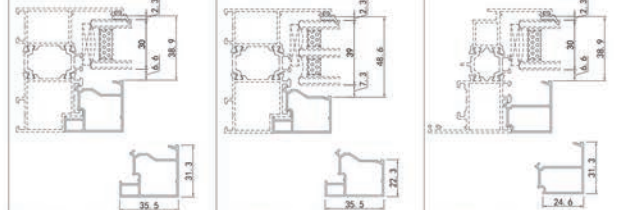

注: 适配30mm(5+20A+5)玻璃

注: 适配39mm(5+12A+5+12A+5)玻璃

注: 适配30mm(5+20A+5)玻璃

Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
------	------	-----------	--------	------	------	-----------	--------	------	------	-----------	--------


框压线	FME7527Y	1.0mm	0.408kg/m	框压线	FME7528Y	1.0mm	0.370kg/m	窗压线	FME6518Y	1.0mm	0.278kg/m
-----	----------	-------	-----------	-----	----------	-------	-----------	-----	----------	-------	-----------



注: 适配39mm(5+12A+5+12A+5)玻璃


Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
------	------	-----------	--------	------	------	-----------	--------	------	------	-----------	--------

扇压线	FME6517Y	1.0mm	0.328kg/m	拼条	6365	1.4mm	0.093kg/m	角码	FMEJM-26.7	3.5mm	4.317kg/m
-----	----------	-------	-----------	----	------	-------	-----------	----	------------	-------	-----------

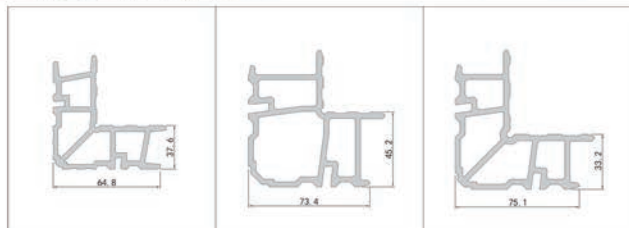


Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
------	------	-----------	--------	------	------	-----------	--------	------	------	-----------	--------

角码	FMEJM-37.6	2.8mm	5.502kg/m	角码	W6203	3.0mm	3.426kg/m	角码	FMEJM-33.2	3.0mm	3.609kg/m
----	------------	-------	-----------	----	-------	-------	-----------	----	------------	-------	-----------

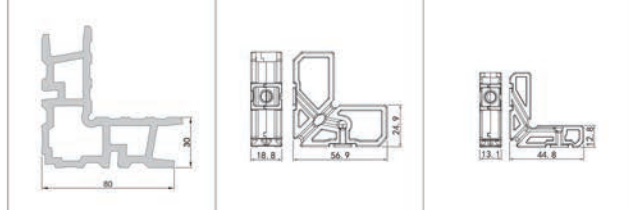

Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
------	------	-----------	--------	------	------	-----------	--------	------	------	-----------	--------

角码	W1008	4.0mm	4.368kg/m	角码	JM65-01			角码	JM65-08		
----	-------	-------	-----------	----	---------	--	--	----	---------	--	--

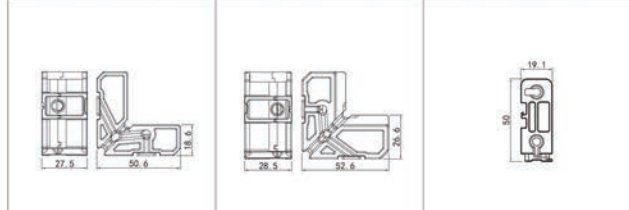

Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
------	------	-----------	--------	------	------	-----------	--------	------	------	-----------	--------

角码	JM65-09			角码	JM75Y-17			中框连接件	JM65-04		
----	---------	--	--	----	----------	--	--	-------	---------	--	--



JA75系列欧洲系统断桥-型材产品图

JA75 Series European Style Thermal break System Window and door

											
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
中框连接件	JM65-05										
											
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
框内胶条	330332-2	EPDM		框外胶条	ZY-2869	EPDM		框外胶条	300964	EPDM	
											
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
密封胶条	300979	EPDM		密封胶条	ZY-1275	EPDM		密封胶条	400408	EPDM	

JA75系列欧洲系统断桥-型材产品图

JA75 Series European Style Thermal break System Window and door

											
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
等压胶条	MDJT-75-Q1	EPDM		压线胶条	300454	EPDM		密封胶条	FJ6507	EPDM	
											
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
防虫条	101126	EPDM		隔热条	BT2001	PA66	0.073kg/m	隔热条	BT2015	PA66	0.090kg/m
											
Name	Code	Material	Weight	Name	Code	Material	Weight				
隔热条	BT2005	PA66	0.082kg/m	隔热条	BT3003	PA66	0.102kg/m				

五金装配图


Hardware assembly drawing



内开窗


Inward opening window

室内
Inside



室外
Outside

室内
Inside



室外
Outside

五金装配图


Hardware assembly drawing



外开窗

Outward opening window

室内
Inside



室外
Outside


五金装配图

Hardware assembly drawing



外悬窗

Overhanging window



室内
Inside

室外
Outside

五金装配图


Hardware assembly drawing



内开门

Inward opening door

室内
Inside

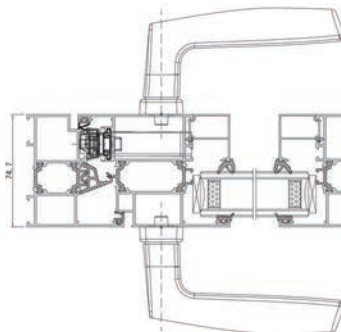

室外
Outside

五金装配图


Hardware assembly drawing



外开门

Outward opening door

室内
Inside

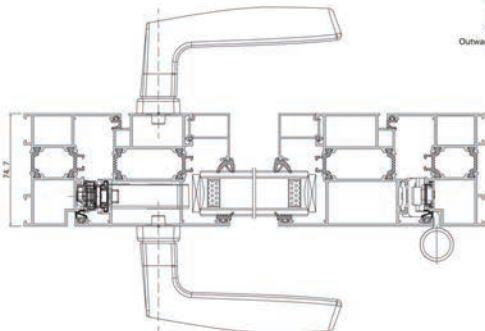


室外
Outside




技术参数 PARAMETER

型材宽度 Profile width	90mm
型材壁厚 Profile thickness	1.8mm
可视面宽度 Visible surface width	外框: 64.7mm / 玻璃: 74.7mm Frame: 64.7mm / Glass fan: 74.7mm
铝材标准 Aluminum standard	6060T66超高精级欧铝材 6060T66 European standard aluminum
玻璃规格 Glass specification	5+20A+5mm中空钢化玻璃 / 5+12A+5+12A+5中空钢化玻璃 5+20A+5mm double tempered glass / 5+12A+5+12A+5 triple tempered glass
五金品牌 Hardware brand	OTA / 好博 OTA / HOPPE
组角工艺 Angle of group technology	撞角销钉注胶双重工艺 Double process of adhesive injection for Angle pin
胶条材质 Strip material	EPDM汽车级密封胶条 EPDM automotive grade sealing tape
开启方式 Opening way	内开 / 外开 Inward / Outward open

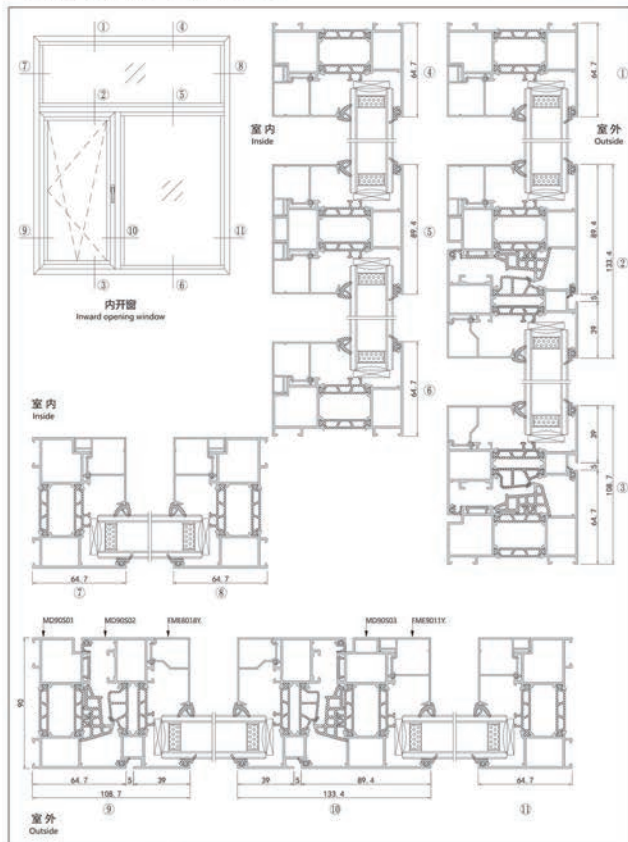

JA90系列欧洲系统断桥-型材产品图

JA 90 Series European Style Thermal break System Window and door

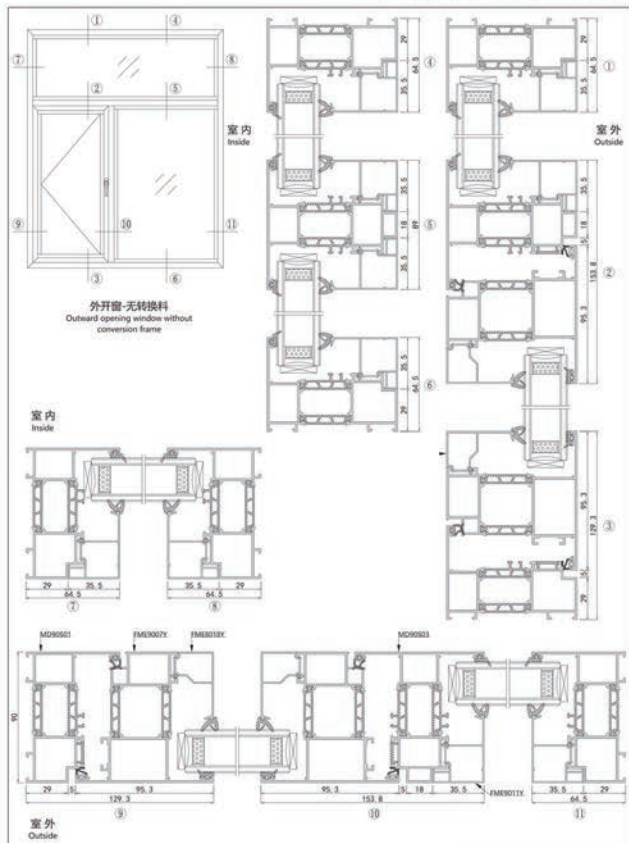


青島雅斤工貿有限公司
Qingdao Jachin Industry and Trade Co., Ltd



JA 90系列欧洲系统断桥-型材产品图


JA 90 Series European Style Thermal break System Window and door

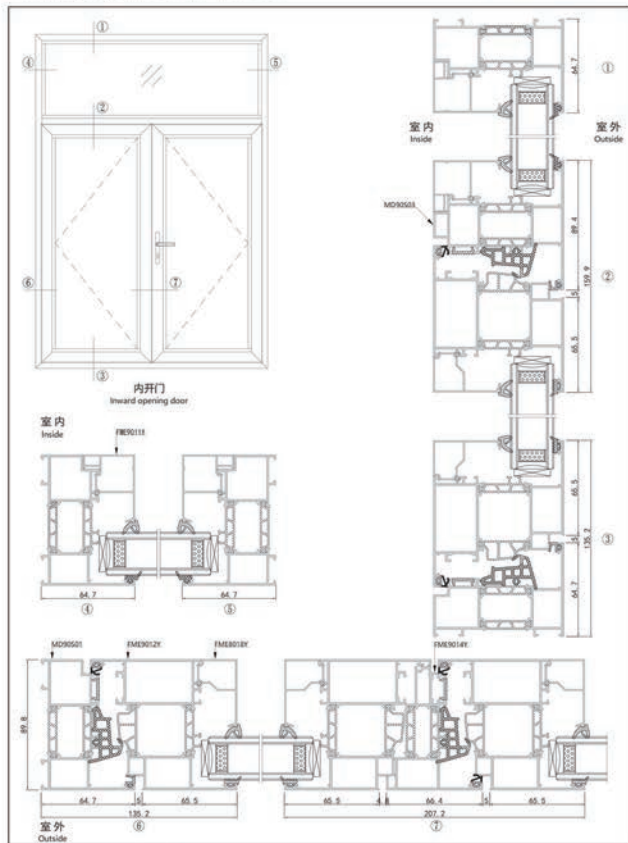

青島雅斤工貿有限公司
Qingdao Jachin Industry and Trade Co., Ltd

JA90系列欧洲系统断桥-型材产品图


JA 90 Series European Style Thermal break System Window and door

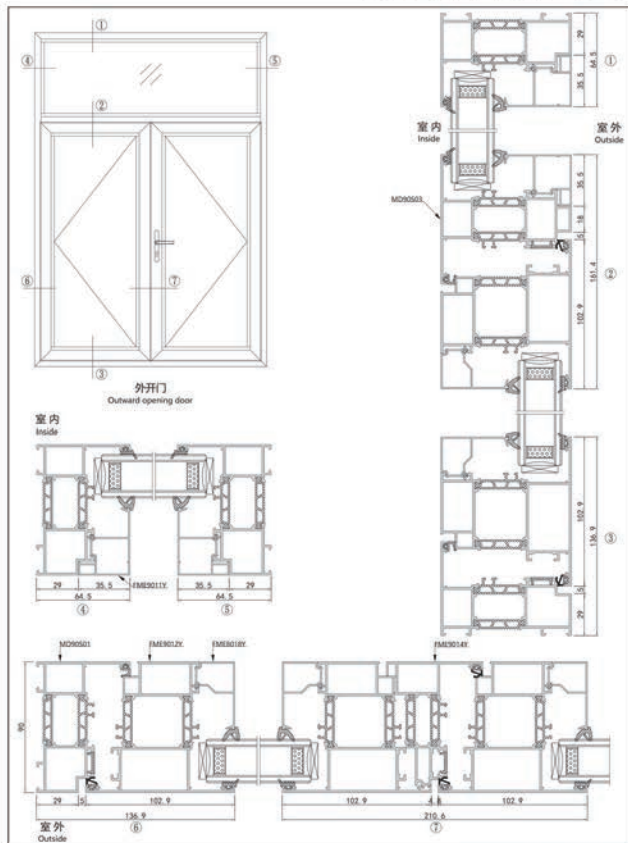



青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

JA90系列欧洲系统断桥-型材产品图

JA 90 Series European Style Thermal break System Window and door

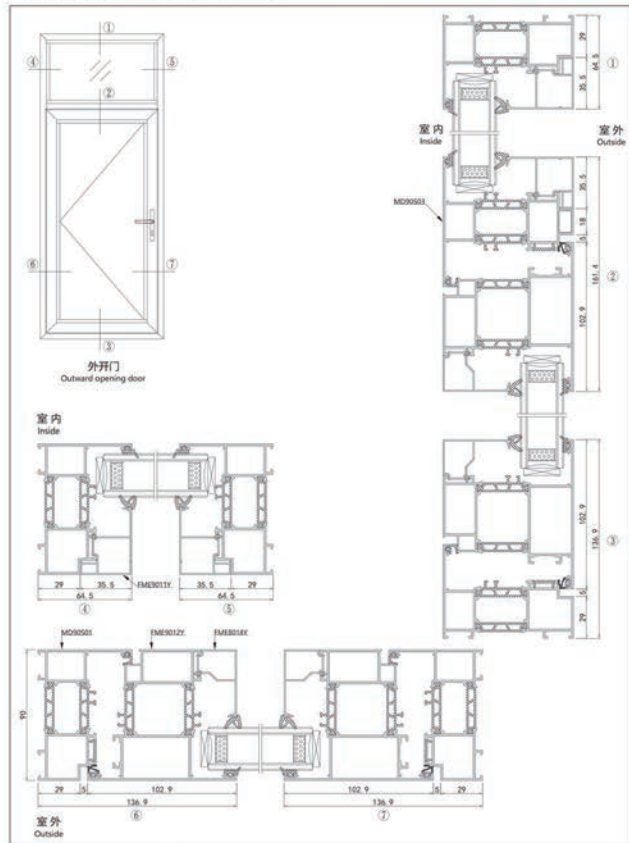


青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

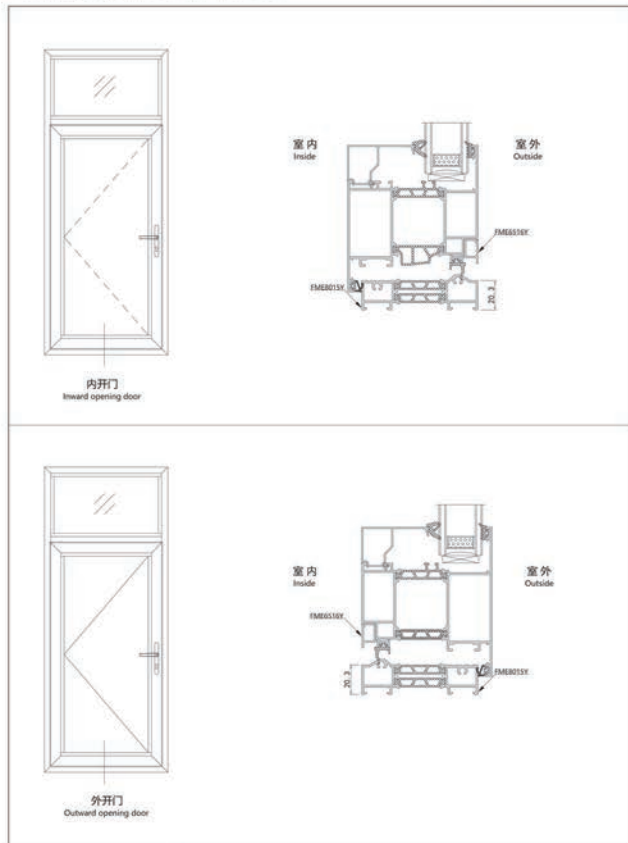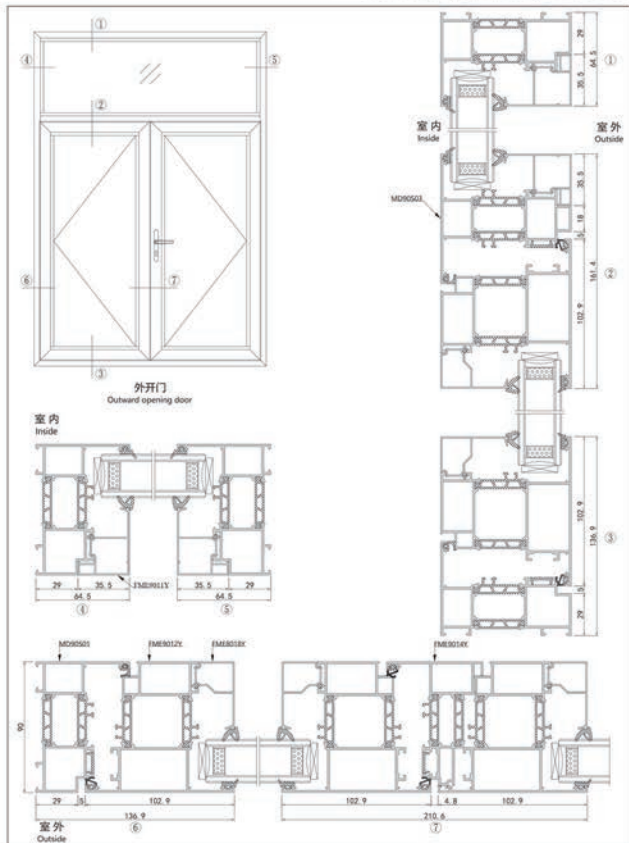


JA90系列欧洲系统断桥-型材产品图


JA 90 Series European Style Thermal break System Window and door



拼接
Connection profiles



拼接
Connection profiles



90转角
90 corner

JA90系列欧洲系统断桥-型材产品图

JA 90 Series European Style Thermal break System Window and door











135转角
135 corner

注: A面配角码JM75Y-17 B面配角码JM65-01	注: A面配连接件JM65-05 B面配连接件JM65-04	注: A面配角码FME65-09 B面配角码FME65-08																								
<table><tr><th>Name</th><th>Code</th><th>Thickness</th><th>Weight</th></tr><tr><td>边框</td><td>MD90501</td><td>1.5mm</td><td>1.686kg/m</td></tr></table>	Name	Code	Thickness	Weight	边框	MD90501	1.5mm	1.686kg/m	<table><tr><th>Name</th><th>Code</th><th>Thickness</th><th>Weight</th></tr><tr><td>中挺</td><td>MD90503</td><td>1.5mm</td><td>1.836kg/m</td></tr></table>	Name	Code	Thickness	Weight	中挺	MD90503	1.5mm	1.836kg/m	<table><tr><th>Name</th><th>Code</th><th>Thickness</th><th>Weight</th></tr><tr><td>窗中挺</td><td>FME9014Y</td><td>1.5mm</td><td>1.448kg/m</td></tr></table>	Name	Code	Thickness	Weight	窗中挺	FME9014Y	1.5mm	1.448kg/m
Name	Code	Thickness	Weight																							
边框	MD90501	1.5mm	1.686kg/m																							
Name	Code	Thickness	Weight																							
中挺	MD90503	1.5mm	1.836kg/m																							
Name	Code	Thickness	Weight																							
窗中挺	FME9014Y	1.5mm	1.448kg/m																							
注: A面配角码JM65-09 B面配角码JM65-08	注: A面配角码FMEJM-37.6 B面配角码FMEJM-26.7	注: A面配角码W1008 B面配角码W6203																								
<table><tr><th>Name</th><th>Code</th><th>Thickness</th><th>Weight</th></tr><tr><td>内开窗扇</td><td>MD90502</td><td>1.5mm</td><td>1.658kg/m</td></tr></table>	Name	Code	Thickness	Weight	内开窗扇	MD90502	1.5mm	1.658kg/m	<table><tr><th>Name</th><th>Code</th><th>Thickness</th><th>Weight</th></tr><tr><td>外开窗扇</td><td>FME9007Y</td><td>1.5mm</td><td>1.959kg/m</td></tr></table>	Name	Code	Thickness	Weight	外开窗扇	FME9007Y	1.5mm	1.959kg/m	<table><tr><th>Name</th><th>Code</th><th>Thickness</th><th>Weight</th></tr><tr><td>内开门扇</td><td>FME9012</td><td>1.5mm</td><td>2.028kg/m</td></tr></table>	Name	Code	Thickness	Weight	内开门扇	FME9012	1.5mm	2.028kg/m
Name	Code	Thickness	Weight																							
内开窗扇	MD90502	1.5mm	1.658kg/m																							
Name	Code	Thickness	Weight																							
外开窗扇	FME9007Y	1.5mm	1.959kg/m																							
Name	Code	Thickness	Weight																							
内开门扇	FME9012	1.5mm	2.028kg/m																							
注: A面配角码W6203 B面配角码FMEJM-33.2	注: A面配角码W6203 B面配角码FMEJM-33.2	注: A面配角码W6203 B面配角码FMEJM-33.2																								
<table><tr><th>Name</th><th>Code</th><th>Thickness</th><th>Weight</th></tr><tr><td>外开门扇</td><td>FME9013Y</td><td>1.5mm</td><td>2.027kg/m</td></tr></table>	Name	Code	Thickness	Weight	外开门扇	FME9013Y	1.5mm	2.027kg/m	<table><tr><th>Name</th><th>Code</th><th>Thickness</th><th>Weight</th></tr><tr><td>低门框</td><td>FME8015Y</td><td>1.5mm</td><td>1.135kg/m</td></tr></table>	Name	Code	Thickness	Weight	低门框	FME8015Y	1.5mm	1.135kg/m	<table><tr><th>Name</th><th>Code</th><th>Thickness</th><th>Weight</th></tr><tr><td>门框边沿</td><td>FME6516Y</td><td>1.2mm</td><td>0.201kg/m</td></tr></table>	Name	Code	Thickness	Weight	门框边沿	FME6516Y	1.2mm	0.201kg/m
Name	Code	Thickness	Weight																							
外开门扇	FME9013Y	1.5mm	2.027kg/m																							
Name	Code	Thickness	Weight																							
低门框	FME8015Y	1.5mm	1.135kg/m																							
Name	Code	Thickness	Weight																							
门框边沿	FME6516Y	1.2mm	0.201kg/m																							

FME7508Y-A FME6508Y-B 95.7 90.3 90.9	FME7509Y-A FME6509Y-B 90.9 90.3 90.9	FME7520Y-A FME7520Y-B 90 35.3 15.8 23.8																								
<table><tr><th>Name</th><th>Code</th><th>Thickness</th><th>Weight</th></tr><tr><td>90转角</td><td>FME9008Y</td><td>1.5mm</td><td>1.815kg/m</td></tr></table>	Name	Code	Thickness	Weight	90转角	FME9008Y	1.5mm	1.815kg/m	<table><tr><th>Name</th><th>Code</th><th>Thickness</th><th>Weight</th></tr><tr><td>135转角</td><td>FME9009Y</td><td>1.5mm</td><td>1.309kg/m</td></tr></table>	Name	Code	Thickness	Weight	135转角	FME9009Y	1.5mm	1.309kg/m	<table><tr><th>Name</th><th>Code</th><th>Thickness</th><th>Weight</th></tr><tr><td>拼管</td><td>FME9010Y</td><td>1.5mm</td><td>1.112kg/m</td></tr></table>	Name	Code	Thickness	Weight	拼管	FME9010Y	1.5mm	1.112kg/m
Name	Code	Thickness	Weight																							
90转角	FME9008Y	1.5mm	1.815kg/m																							
Name	Code	Thickness	Weight																							
135转角	FME9009Y	1.5mm	1.309kg/m																							
Name	Code	Thickness	Weight																							
拼管	FME9010Y	1.5mm	1.112kg/m																							
35.5 46.6 37.6 24.6	35.5 46.6 37.6 24.6	35.5 46.6 37.6 24.6																								
注: 适配30mm(S+20A+S)玻璃	注: 适配39mm(S+12A+S+12A+S)玻璃	注: 适配30mm(S+20A+S)玻璃																								
<table><tr><th>Name</th><th>Code</th><th>Thickness</th><th>Weight</th></tr><tr><td>框压线</td><td>FME9011Y</td><td>1.0mm</td><td>0.447kg/m</td></tr></table>	Name	Code	Thickness	Weight	框压线	FME9011Y	1.0mm	0.447kg/m	<table><tr><th>Name</th><th>Code</th><th>Thickness</th><th>Weight</th></tr><tr><td>框压线</td><td>FME9012Y</td><td>1.0mm</td><td>0.422kg/m</td></tr></table>	Name	Code	Thickness	Weight	框压线	FME9012Y	1.0mm	0.422kg/m	<table><tr><th>Name</th><th>Code</th><th>Thickness</th><th>Weight</th></tr><tr><td>扇压线</td><td>FME8018Y</td><td>1.0mm</td><td>0.344kg/m</td></tr></table>	Name	Code	Thickness	Weight	扇压线	FME8018Y	1.0mm	0.344kg/m
Name	Code	Thickness	Weight																							
框压线	FME9011Y	1.0mm	0.447kg/m																							
Name	Code	Thickness	Weight																							
框压线	FME9012Y	1.0mm	0.422kg/m																							
Name	Code	Thickness	Weight																							
扇压线	FME8018Y	1.0mm	0.344kg/m																							
35.5 46.6 37.6 24.6	35.5 46.6 37.6 24.6	80 26.7																								
注: 适配39mm(S+12A+S+12A+S)玻璃																										
<table><tr><th>Name</th><th>Code</th><th>Thickness</th><th>Weight</th></tr><tr><td>框压线</td><td>FME8019Y</td><td>1.0mm</td><td>0.314kg/m</td></tr></table>	Name	Code	Thickness	Weight	框压线	FME8019Y	1.0mm	0.314kg/m	<table><tr><th>Name</th><th>Code</th><th>Thickness</th><th>Weight</th></tr><tr><td>拼条</td><td>6365</td><td>1.4mm</td><td>0.093kg/m</td></tr></table>	Name	Code	Thickness	Weight	拼条	6365	1.4mm	0.093kg/m	<table><tr><th>Name</th><th>Code</th><th>Thickness</th><th>Weight</th></tr><tr><td>角码</td><td>FMEJM-26.7</td><td>3.5mm</td><td>4.317kg/m</td></tr></table>	Name	Code	Thickness	Weight	角码	FMEJM-26.7	3.5mm	4.317kg/m
Name	Code	Thickness	Weight																							
框压线	FME8019Y	1.0mm	0.314kg/m																							
Name	Code	Thickness	Weight																							
拼条	6365	1.4mm	0.093kg/m																							
Name	Code	Thickness	Weight																							
角码	FMEJM-26.7	3.5mm	4.317kg/m																							

JA90系列欧洲系统断桥-型材产品图


JA90 Series European Style Thermal break System Window and door

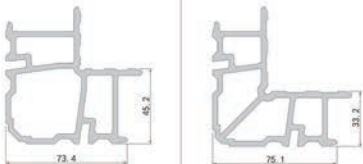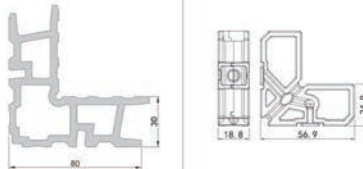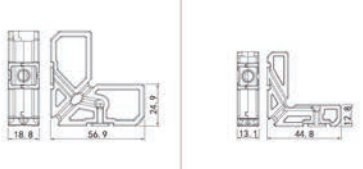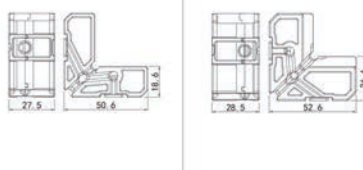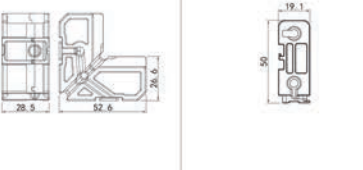


							
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
角码	FME/M-37.6	2.8mm	5.502kg/m	角码	W6203	3.0mm	3.426kg/m
							
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
角码	W1008	4.0mm	4.368kg/m	角码	JM65-01		
							
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
角码	JM65-09			角码	JM75Y-17		
							
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
中框连接件	JM65-04						

JA90系列欧洲系统断桥-型材产品图


JA90 Series European Style Thermal break System Window and door

							
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
中框连接件	JM65-05						
							
Name	Code	Material	Weight	Name	Code	Material	Weight
密封胶条	330332-2	EPDM		密封胶条	ZY-2869	EPDM	
							
Name	Code	Material	Weight	Name	Code	Material	Weight
密封胶条	300979	EPDM		密封胶条	ZY-1275	EPDM	
							
Name	Code	Material	Weight	Name	Code	Material	Weight
密封胶条	400408	EPDM					


											
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
等压胶条	MD/T-90-01	EPDM		压线胶条	300454	EPDM		密封胶条	FJ6507	EPDM	
											
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
防虫条	T01126	EPDM		隔热条	BT3531	PA66	0.147kg/m	隔热条	BT3532	PA66	0.174kg/m
											
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
隔热条	BT3533	PA66	0.187kg/m	隔热条	BT3003	PA66	0.102kg/m	隔热条			

五金装配图 Hardware assembly drawing  内开窗 Inward opening window  室内 Indoor 室外 Outdoor		五金装配图 Hardware assembly drawing  外悬窗 Overhanging window  室内 Indoor 室外 Outdoor	
五金装配图 Hardware assembly drawing  外开窗 Outward opening window  室内 Indoor 室外 Outdoor			

五金装配图
Hardware assembly drawing

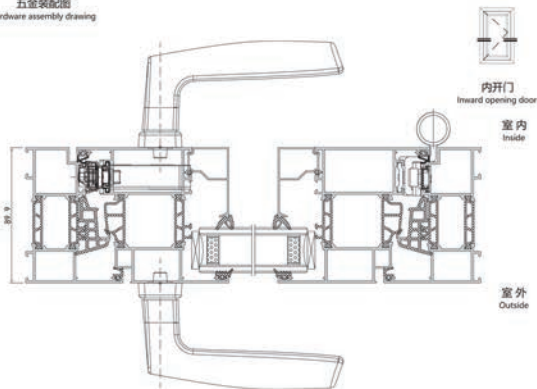

五金装配图
Hardware assembly drawing

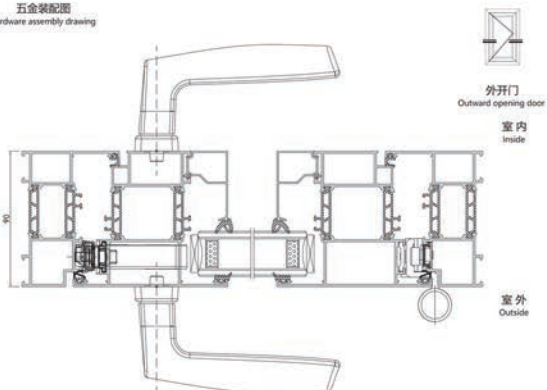


技术参数 PARAMETER



型材宽度 Profile width	110mm
型材壁厚 Profile thickness	1.4mm
可开启宽度 Visible surface width	外框: 46.3mm / 玻璃: 75.3mm Frame: 46.3mm / Glass fan: 75.3mm
铝材标准 Aluminum standard	6063 高纯铝 欧标铝材 6063 European standard aluminum
玻璃规格 Glass specification	5+15A+5mm 中空钢化玻璃 / 5+20A+5mm 中空钢化玻璃 5+15A+5mm double tempered glass / 5+20A+5mm double tempered glass
五金品牌 Hardware brand	希美克 CMECH
组角工艺 Angle of group technology	螺丝注胶工艺 Corner assembly with screw and glue
胶条材质 Strip material	EPDM 汽车级密封胶条 EPDM automotive grade sealing tape
开启方式 Opening way	纱扇内开 / 玻璃外开 Screen inward / Glass fan Outward open


JA110系列断桥窗纱一体欧洲系统型材产品图

JA110 Series European Style Thermal break System Window and door

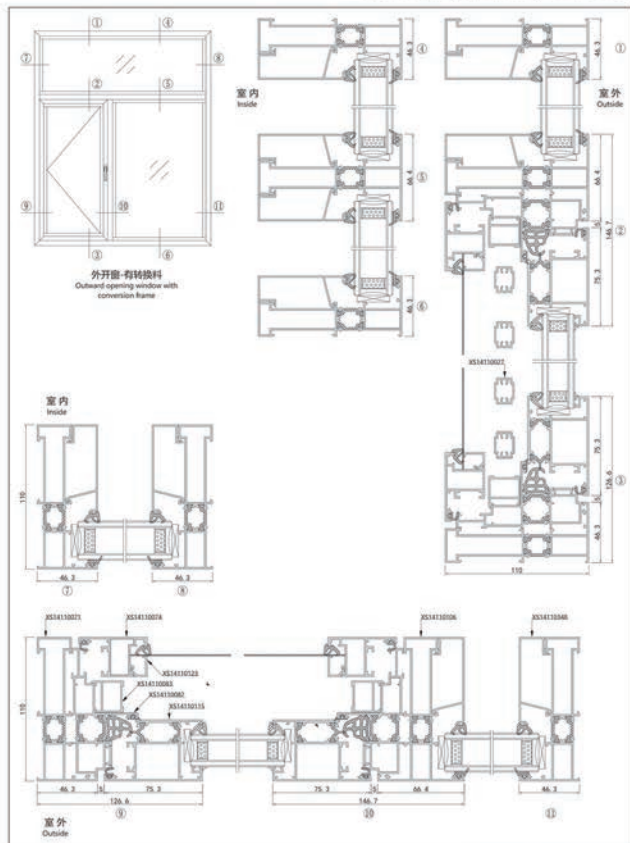


JA110系列断桥窗纱一体欧洲系统型材产品图

JA110 Series European Style Thermal break System Window and door

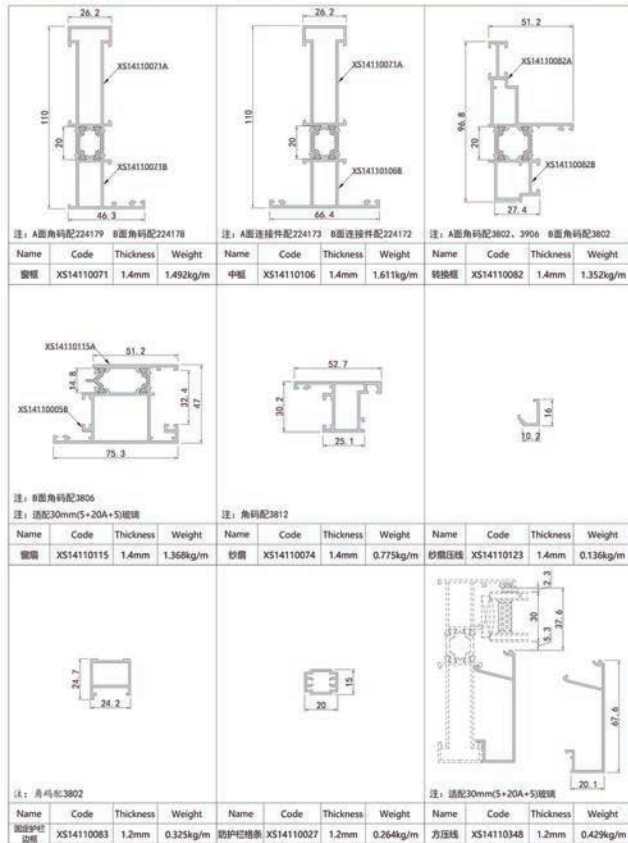

JA110系列断桥窗纱一体欧洲系统型材产品图

JA110 Series European Style Thermal break System Window and door

											
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
角码	224178	13*26.3		角码	224179	13*57.4		角码	3802	13*21.2	
											
				注：偏心3.35							
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
角码	3806	32*26.9		角码	3812	13*26.4		角码	3906	3*19.4	
											
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Material	Weight
中框连接件	224172	13.1*25.6		中框连接件	224173	13.1*47.7		玻内胶条	300731	EPDM	


JA110系列断桥窗纱一体欧洲系统型材产品图

JA110 Series European Style Thermal break System Window and door


											
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
玻内胶条	300652	EPDM		玻外胶条	ZY-2869	EPDM		密封胶条	300072	EPDM	
											
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
密封胶条	300464	EPDM		等压胶条	EPK099-FH	EPDM		防虫条	101126	EPDM	
											
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
隔热条	BT2001	PA66	0.073kg/m	隔热条	TJ148041	PA66	0.065kg/m	隔热条	BT14801	PA66	0.056kg/m

五金装配图

Hardware assembly drawing

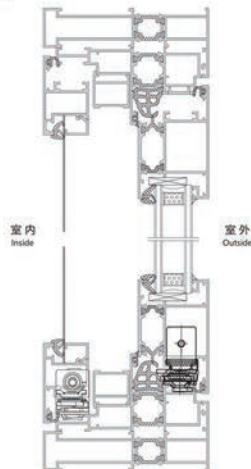


外开窗
Outward opening window

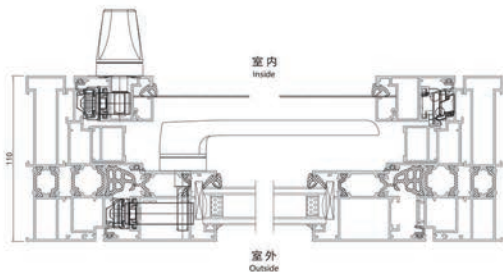


五金装配图

Hardware assembly drawing

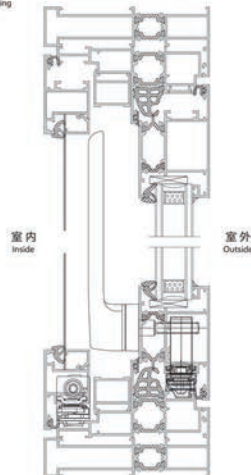


外悬窗
Overhanging window

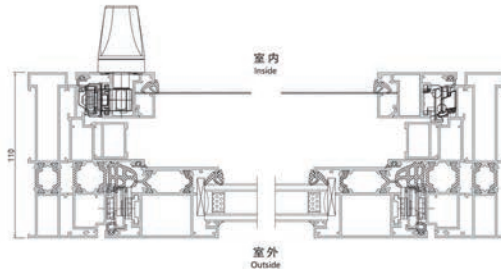




技术参数 PARAMETER

型材宽度 Profile width	50mm
型材壁厚 Profile thickness	1.4mm
可视面宽度 Visible surface width	外框: 46mm / 玻璃: 63.5mm Frame: 46mm / Glass: 63.5mm
铝材标准 Aluminum standard	6063高精级欧标铝材 6063 European standard aluminum
玻璃规格 Glass specification	6+12A+6mm中空钢化玻璃 6+12A+6mm double tempered glass
五金品牌 Hardware brand	手摇专属五金 Special hardware for crank window
组角工艺 Angle of group technology	组角胶 排角工艺 Adhesive corner combination
胶条材质 Strip material	EPDM汽车级密封胶条 EPDM automotive grade sealing tape
开启方式 Opening way	外开 Outward open


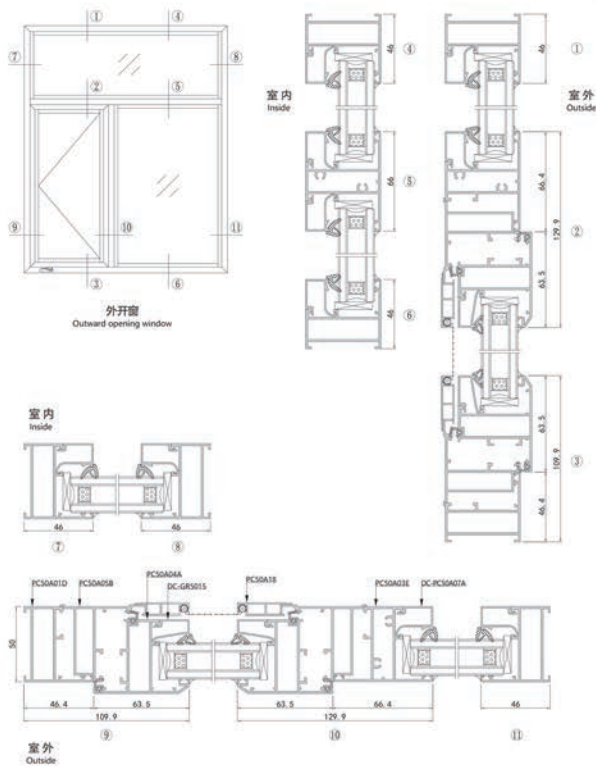


JA50系列普铝-美式手摇型材产品图

JA 50 Series America Style Non-thermal System Crank Window





外开窗
Outward opening window

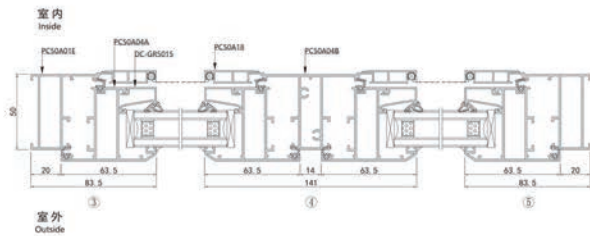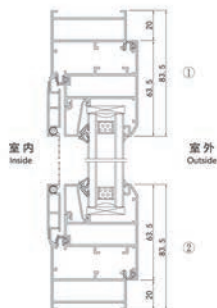


JA 50系列普铝-美式手摇型材产品图

JA 50 Series America Style Non-thermal System Crank Window



不带固定所用材料






注: 配角料PC50A13

Name	Code	Thickness	Weight
窗框	PC50A01D	1.4mm	0.715kg/m

注: 配角料PC50A13

Name	Code	Thickness	Weight
窗框	PC50A01E	1.4mm	0.754kg/m

Name	Code	Thickness	Weight
窗中框	PC50A03E	1.4mm	0.903kg/m



带固定所用材料

注: 配角料PC50A13

Name	Code	Thickness	Weight
窗中框	PC50A04B	1.4mm	1.032kg/m

Name	Code	Thickness	Weight
手摇外开窗	PC50A04A	1.4mm	0.864kg/m

注: 配角料PC50A14

Name	Code	Thickness	Weight
转换料	PC50A05B	1.4mm	0.713kg/m



注: 适配24mm(6+12A+6)玻璃

Name	Code	Thickness	Weight
纱窗	PC50A18	1.0mm	0.216kg/m


Name	Code	Thickness	Weight
压线	DC-PC50A07A	1.0mm	0.213kg/m

注: 适配24mm(6+12A+6)玻璃

Name	Code	Thickness	Weight
压线	DC-GR5015	1.0mm	0.185kg/m


JA50系列普铝-美式手摇型材产品图

JA 50 Series America Style Non-thermal System Crank Window

											
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Material	Weight
角码	PC50A13	2.0mm	1.39kg/m	角码	PC50A14	11.5mm	2.525kg/m	磁内胶条	300332-2	EPDM	
											
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
磁外胶条	ZY-2064	EPDM		密封胶条	300072	EPDM					
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight

JA50系列普铝-美式手摇型材产品图

JA 50 Series America Style Non-thermal System Crank Window

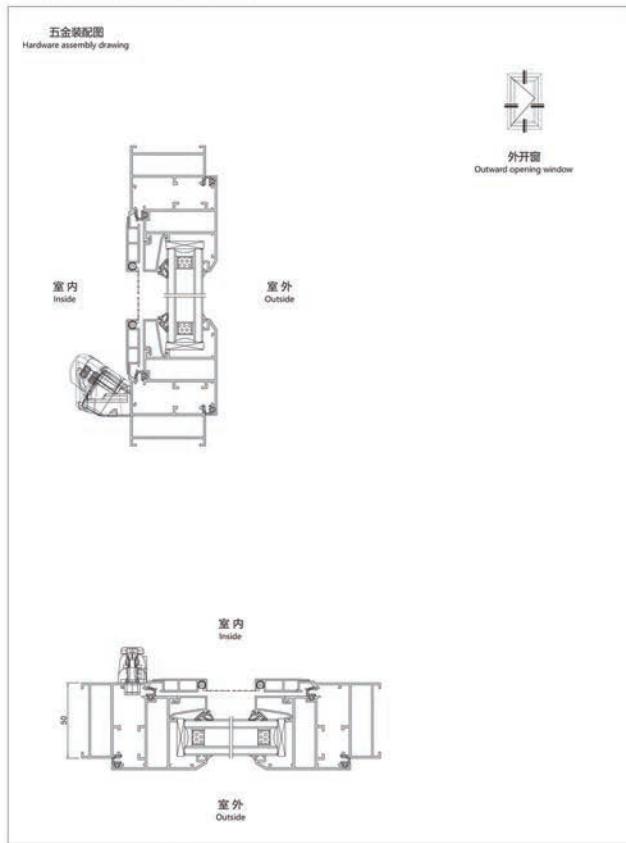


JA50系列普铝-美式手摇型材产品图

JA 50 Series America Style Non-thermal System Crank Window

五金装配图

Hardware assembly drawing

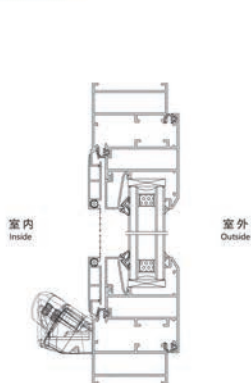


室内
Inside

室外
Outside



外悬窗
Overhanging window



室内
Inside

室外
Outside


JA85系列断桥-美式手摇型材产品图

JA 85 Series America Style Thermal break System Crank Window




技术参数 PARAMETER

型材宽度 Profile width	85mm
型材壁厚 Profile thickness	1.4mm
可视面宽度 Visible surface width	外框: 66.5mm / 玻璃: 72.8mm Frame: 66.5mm / Glass fan: 72.8mm
铝材标准 Aluminum standard	6063高精级欧标铝材 6063 European standard aluminum
玻璃规格 Glass specification	5+9A+5mm中空钢化玻璃 / 5+9A+5+9A+5中空钢化玻璃 5+9A+5mm double tempered glass / 5+9A+5+9A+5mm triple tempered glass
五金品牌 Hardware brand	手摇专属五金 Special hardware for crank window
组角工艺 Angle of group technology	组角胶 撞角工艺 Adhesive corner combination
胶条材质 Strip material	EPDM汽车级密封胶条 EPDM automotive grade sealing tape
开启方式 Opening way	外开 Outward open

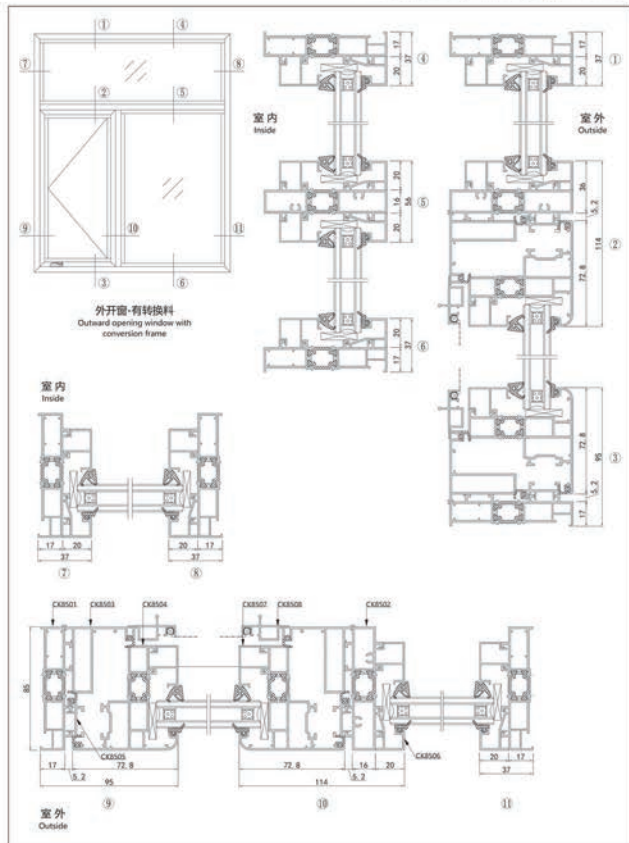

JA85系列断桥-美式手摇型材产品图

JA85 Series America Style Thermal break System Crank Window

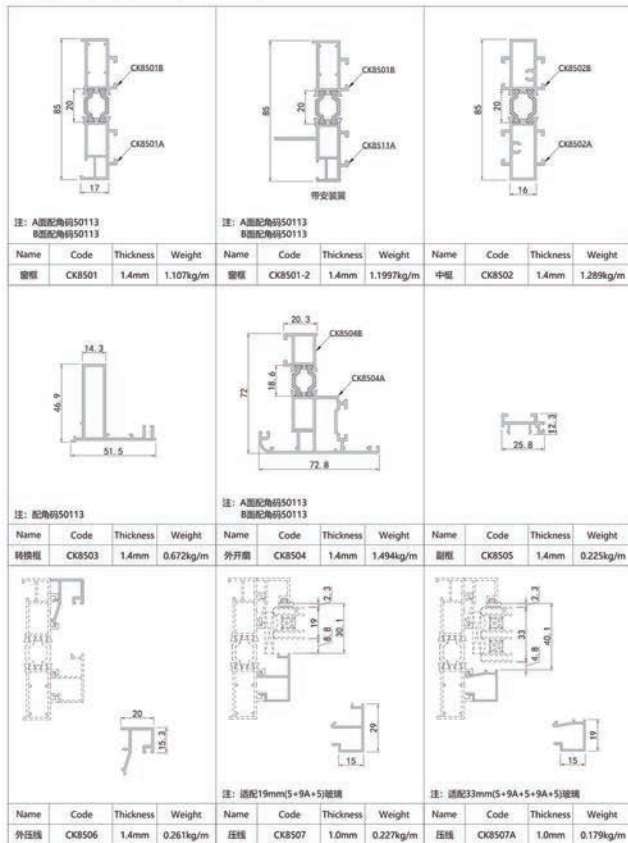

JA85系列断桥-美式手摇型材产品图

JA 85 Series America Style Thermal Break System Crank Window

											
注: 配角码50113											
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
料料	CK8508	1.2mm	0.261kg/m	角码	50113	3.0mm	1.45kg/m				
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
室内胶条	300331	EPDM		室外胶条	ZY-2869	EPDM		密封胶条	300072	EPDM	
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Thickness	Weight
隔热条	BT2001	PA66	0.073kg/m	隔热条	BT18601	PA66	0.064kg/m				

青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

JA85系列断桥-美式手摇型材产品图

JA 85 Series America Style Thermal break System Crank Window



五金装配图
Hardware assembly drawing

外开窗
Outward opening window

JA85系列断桥-美式手摇型材产品图

JA85 Series America Style Thermal break System Crank Window

五金装配图
Hardware assembly drawing

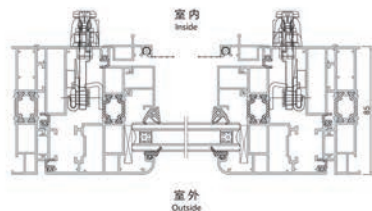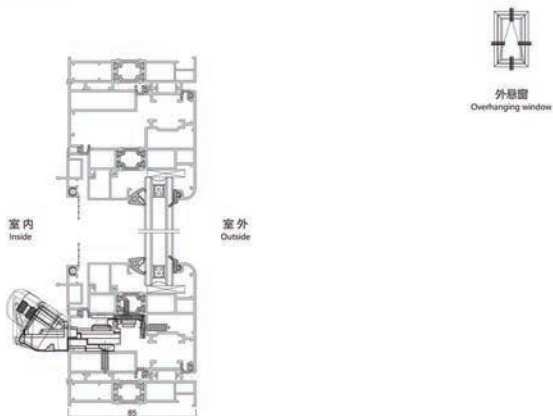



JA83系列断桥-美式提拉型材产品图

JA83 Series America Style Thermal break System Double-hung Window




技术参数 PARAMETER

型材宽度 Profile width	83mm
型材壁厚 Profile thickness	1.5mm
可视面宽度 Visible surface width	外框: 36.6mm / 玻璃: 33.9mm Frame: 36.6mm / Glass fan: 33.9mm
铝材标准 Aluminum standard	6063高精级欧标铝材 6063 European standard aluminum
玻璃规格 Glass specification	5+9A+5mm中空钢化玻璃 5+9A+5mm double tempered glass
五金品牌 Hardware brand	提拉专属五金 Special hardware for hung window
组角工艺 Angle of group technology	角部铆接工艺 Corner joined with screws
胶条材质 Strip material	EPDM汽车级密封胶条 EPDM automotive grade sealing tape
开启方式 Opening way	单提拉 / 双提拉 single hung / double hung window

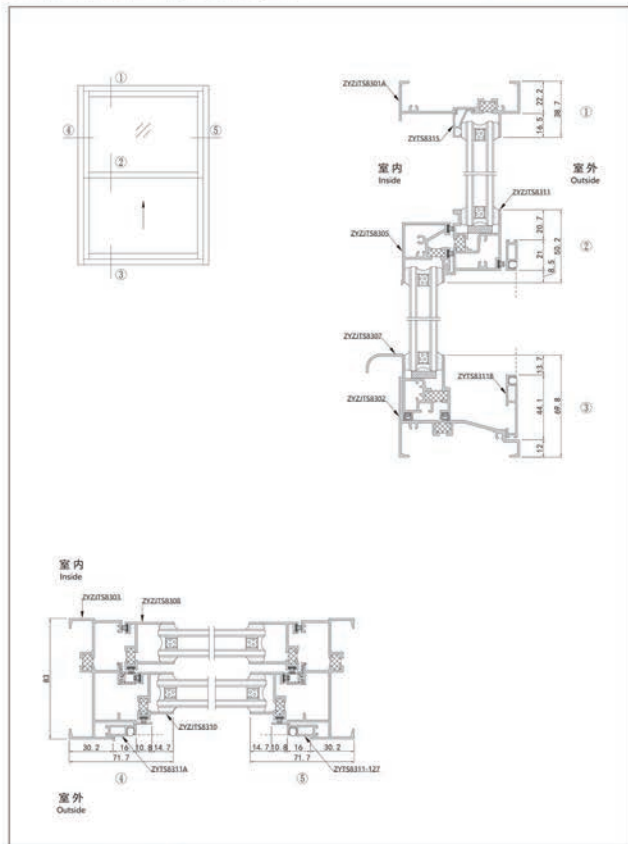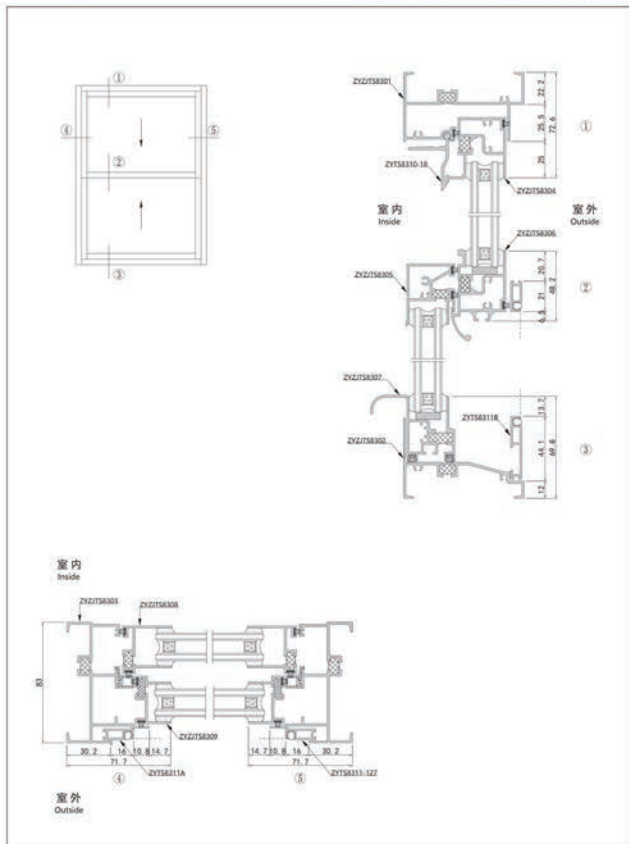

JA83系列断桥-美式提拉型材产品图


JA 85 Series America Style Thermal break System Double-hung Window

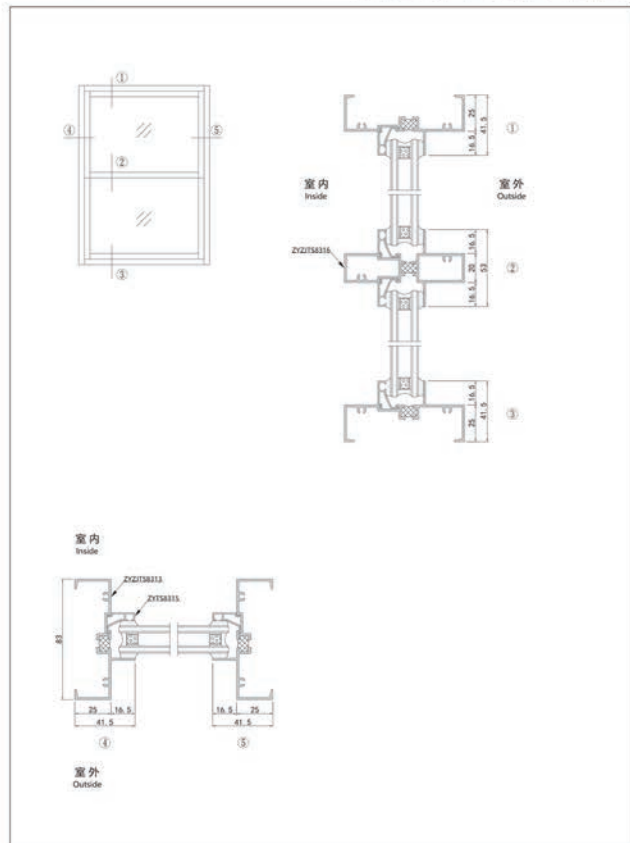

青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

JA83系列断桥-美式提拉型材产品图

JA 85 Series America Style Thermal break System Double-hung Window

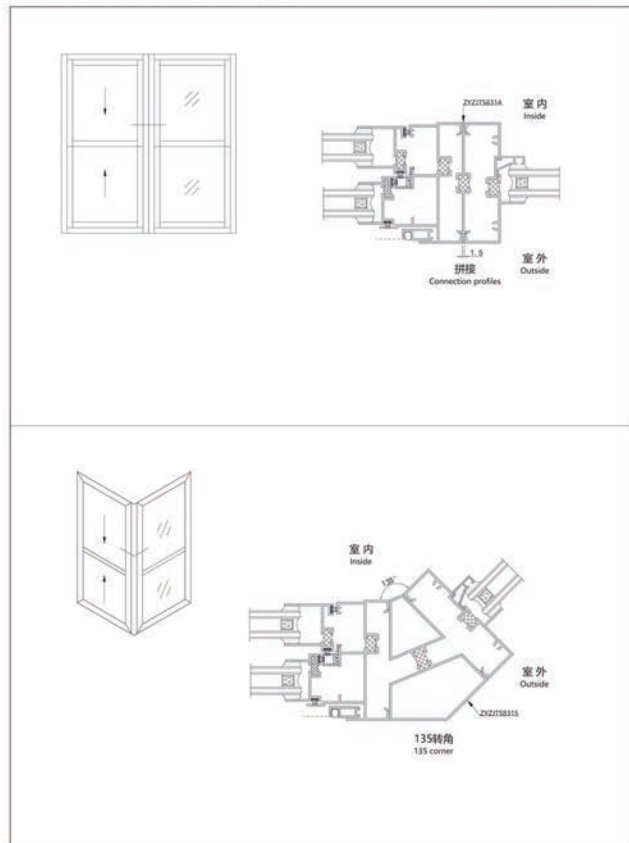

青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

JA83系列断桥-美式提拉型材产品图

JA 83 Series America Style Thermal break System Double-hung Window

Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
上边框	ZYJ/TS8301	1.5mm	1.198kg/m	单边拉上边框	ZYJ/TS8301A	1.5mm	0.887kg/m	下边框	ZYJ/TS8302	1.8mm	0.948kg/m
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
边框	ZYJ/TS8303	1.5mm	1.176kg/m	上框上方	ZYJ/TS8304	1.5mm	0.879kg/m	下框上方	ZYJ/TS8305	1.5mm	0.868kg/m
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
上框下方	ZYJ/TS8306	1.5mm	1.127kg/m	下框下方	ZYJ/TS8307	1.5mm	0.997kg/m	下框边企	ZYJ/TS8308	1.5mm	0.554kg/m

JA 85系列断桥-美式提拉型材产品图





JA 85 Series America Style Thermal break System Double-hung Window

Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
上框边企	ZYJ/TS8309	1.5mm	0.461kg/m	固定边企	ZYJ/TS8310	1.5mm	0.478kg/m	窗扣	ZYJ/TS8310-18	1.8mm	0.410kg/m
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
纱窗	ZYJ/TS8311-127	1.3mm	0.189kg/m	纱窗	ZYJ/TS8311A	1.3mm	0.202kg/m	带拉手纱窗	ZYJ/TS8311B	1.3mm	0.306kg/m
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
固定勾企	ZYJ/TS8311	1.5mm	0.942kg/m	固定座	ZYJ/TS8312	1.2mm	0.434kg/m	压线	ZYJ/TS8315	1.0mm	0.131kg/m

注: 适配19mm(5+9A+5)玻璃



JA83系列断桥-美式提拉型材产品图

JA 85 Series America Style Thermal break System Double-hung Window

											
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
边窗	ZYZ/TS8313	1.5mm	0.887kg/m	拼板	ZYZ/TS8314	1.5mm	0.559kg/m	转角拼管	ZYZ/TS8315	1.5mm	1.515kg/m
											
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Material	Weight
中柱	ZYZ/TS8316	1.5mm	1.231kg/m	限位平纱窗	ZYRTS9710	1.3mm	0.287kg/m	密封胶条	MD/T83-01	EPDM	
											
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
密封胶条	MD/T83-01	EPDM		毛条	S*4						

JA83系列断桥-美式提拉型材产品图


JA 85 Series America Style Thermal break System Double-hung Window

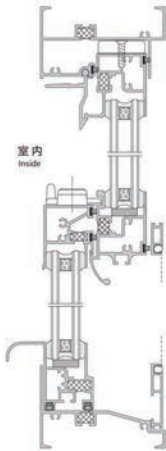

五金装配图 Hardware assembly drawing  室内 Inside 室外 Outside  室内 Inside 室外 Outside											
--	--	--	--	--	--	--	--	--	--	--	--





技术参数 PARAMETER

型材宽度 Profile width	76.2mm
型材壁厚 Profile thickness	1.4mm
可视面宽度 Visible surface width	外框: 19mm / 玻璃: 49.5mm Frame: 19mm / Glass fan: 49.5mm
铝材标准 Aluminum standard	6063高精级欧铝材 6063 European standard aluminum
玻璃规格 Glass specification	5+9A+5mm中空钢化玻璃 5+9A+5mm double tempered glass
五金品牌 Hardware brand	手摇专用五金 Special hardware for crank window
组角工艺 Angle of group technology	组角胶 撞角工艺 / 角部铆接工艺 Adhesive corner combination / Corner joined with screws
胶条材质 Strip material	EPDM汽车级密封胶条 EPDM automotive grade sealing tape
开启方式 Opening way	外开 Outward open

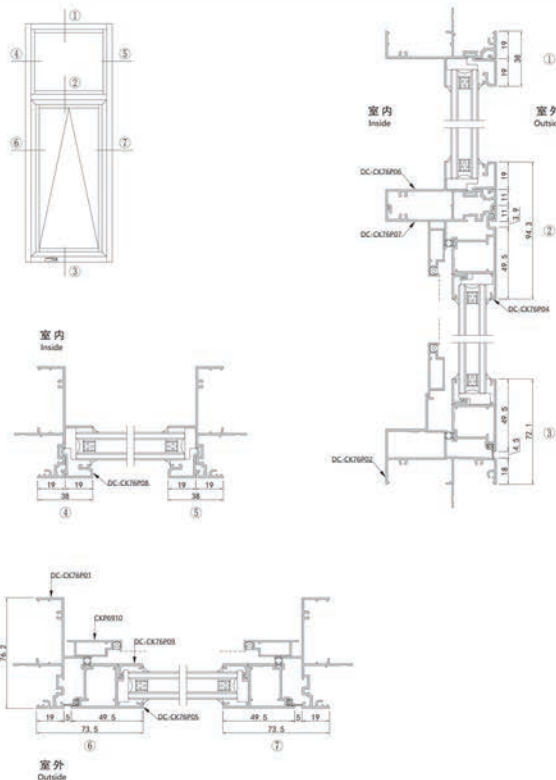

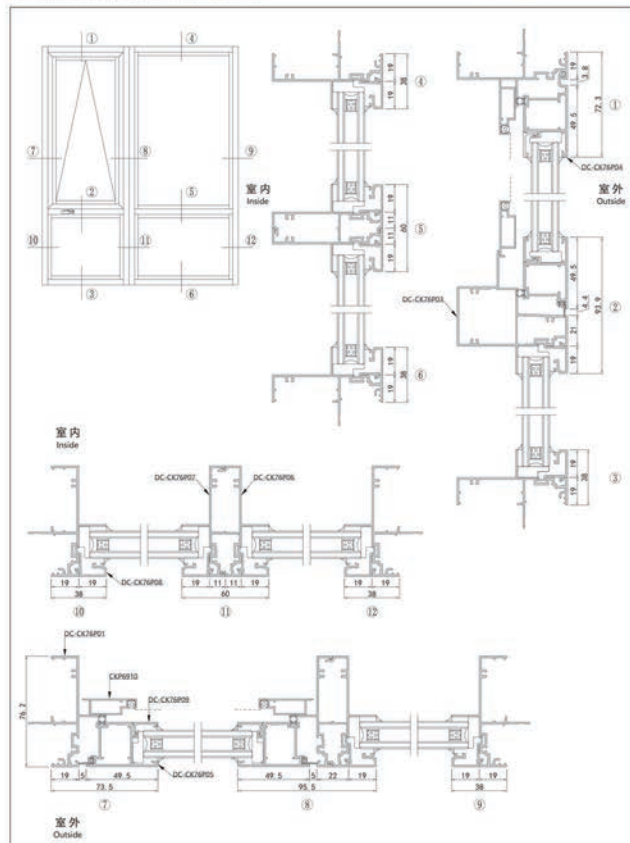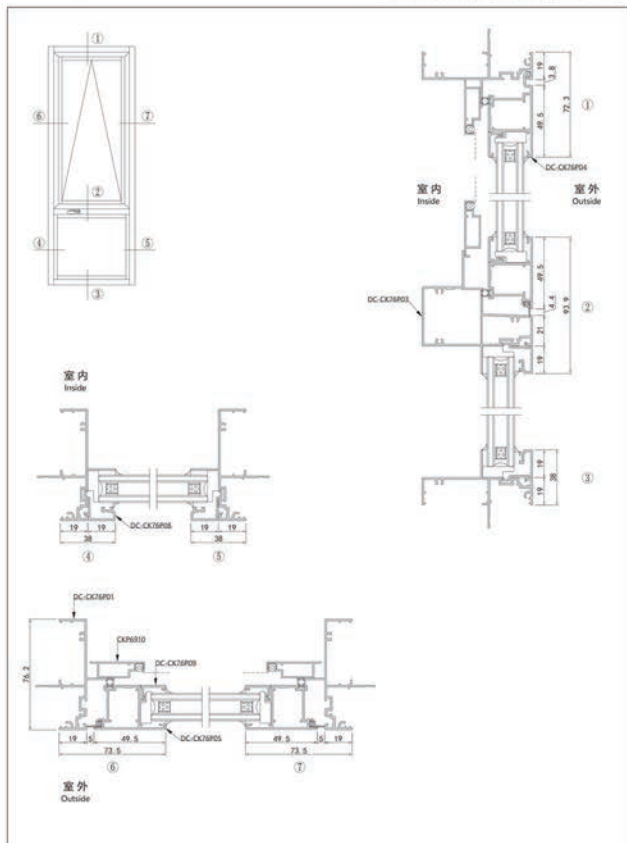

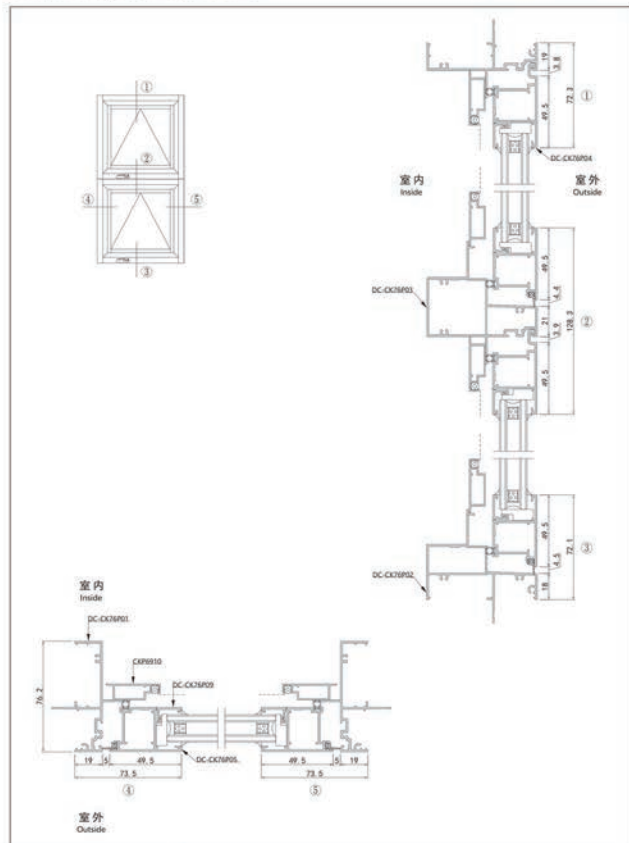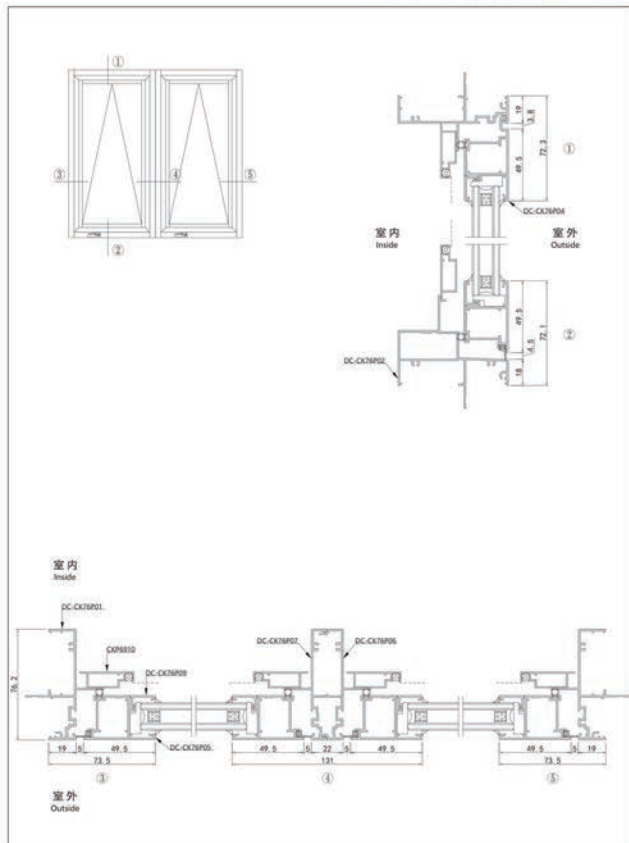

JA76系列断桥-澳式手摇型材产品图

JA76 Series Australia Style Non-thermal System Crank Window

Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
边框	DC-CK76P01	1.4mm	0.728kg/m	开启下框	DC-CK76P02	1.4mm	0.971kg/m	锁中框	DC-CK76P03	1.4mm	1.221kg/m
注: 配角码DC-GR5044				注: 配角码DC-GR5044							
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
上滑	DC-CK76P04	1.4mm	0.653kg/m	边框	DC-CK76P05	1.4mm	0.595kg/m	拼接框A	DC-CK76P06	1.4mm	0.588kg/m
				注: 适配19mm(5+9A+5)玻璃				注: 适配19mm(5+9A+5)玻璃			
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
拼接框B	DC-CK76P07	1.4mm	0.540kg/m	框压线	DC-CK76P08	1.4mm	0.218kg/m	扇压线	DC-CK76P09	1.4mm	0.103kg/m

JA76系列断桥-澳式手摇型材产品图

JA76 Series Australia Style Non-thermal System Crank Window

Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Material	Weight
纱窗	CKP6910	1.2mm	0.258kg/m	角码	DC-GR5044	4.0mm	3.019kg/m	密封胶条	MDJT76-01	EPDM	
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
密封胶条	MDJT76-02	EPDM									
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight

JA76系列断桥-澳式手摇型材产品图

JA 76 Series Australia Style Non-thermal System Crank Window

五金装配图
Hardware assembly drawing










JA80系列普铝-推拉型材产品图



JA 80 Series Non-thermal Sliding System Window and door



技术参数 PARAMETER







型材宽度 Profile width	80.3mm
型材壁厚 Profile thickness	1.4mm
可视面宽度 Visible surface width	外框: 44.9mm / 玻璃: 72.5mm Frame: 44.9mm / Glass pan: 72.5mm
铝材标准 Aluminum standard	6063 高精级欧标铝材 6063 European standard aluminum
玻璃规格 Glass specification	5+9A+5mm 中空钢化玻璃 5+9A+5mm double tempered glass
五金品牌 Hardware brand	希美克 CMECH
组角工艺 Angle of group technology	活动角码工艺 Adjustable corner connector
胶条材质 Strip material	EPDM 汽车级密封胶条 EPDM automotive grade sealing tape
开启方式 Opening way	推拉 Sliding

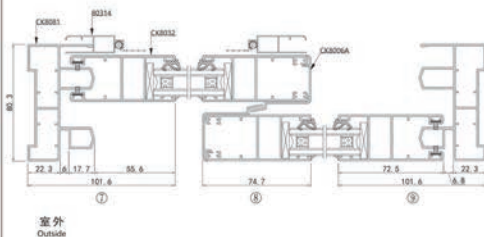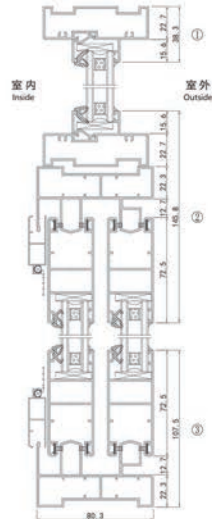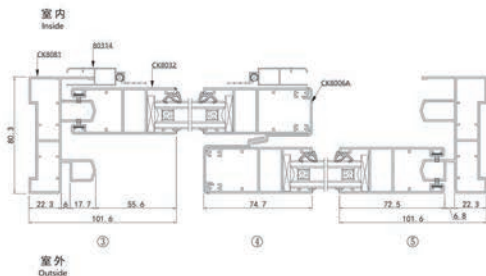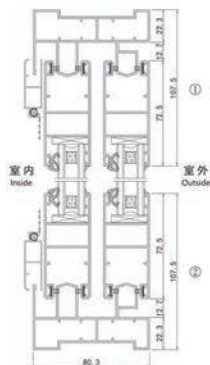

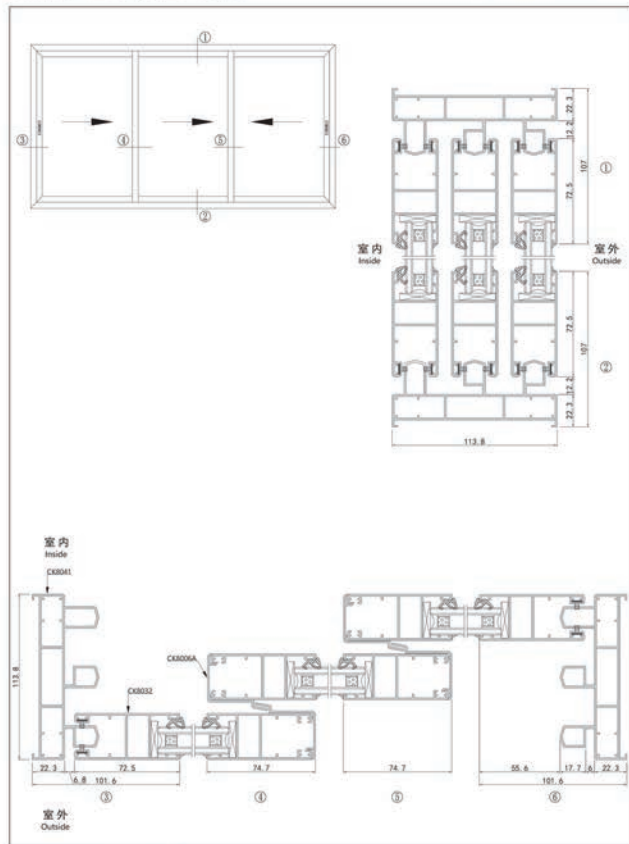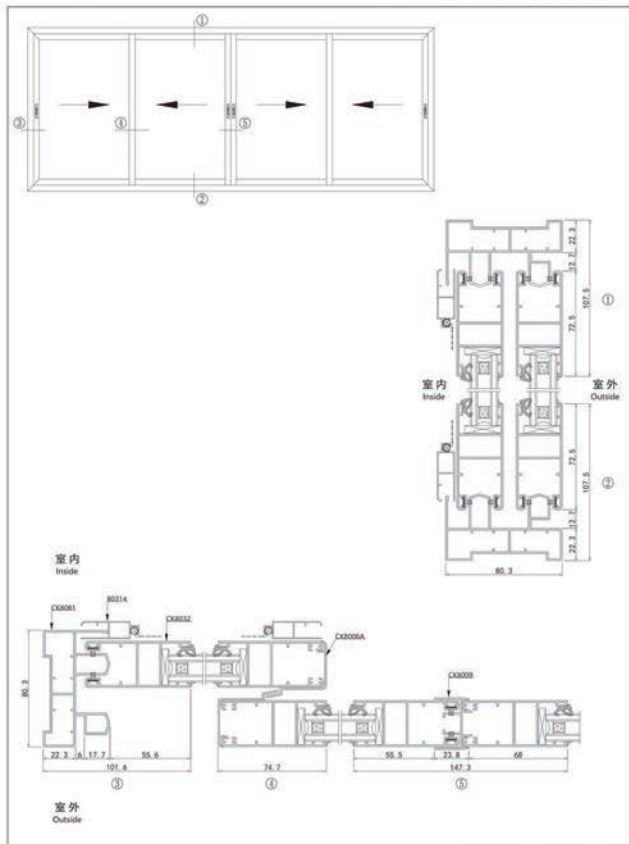

JA80系列普铝-推拉型材产品图

JA 80 Series Non-thermal Sliding System Window and door

											
注: 配角码MDJM-80-01				注: 适配19mm(S+9A+5)玻璃							
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
两轨边框	CK8081	1.4mm	1.429kg/m	扇料	CK8032	1.4mm	0.933kg/m	三轨边框	CK8041	1.4mm	1.876kg/m
											
注: 适配6-12mm玻璃											
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
勾型压板	CK8006A	1.4mm	0.301kg/m	单坡卡槽	CK800BYC	1.4mm	0.257kg/m	收口	CK8009	1.2mm	0.407kg/m
											
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
连接件	CK8024	1.8mm	0.413kg/m	固定框	CK8007	1.4mm	0.952kg/m	固定中框	CK8008	1.4mm	1.018kg/m

青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

JA80系列普铝-推拉型材产品图

JA 80 Series Non-thermal Sliding System Window and door


											
注: 适配19mm(S+9A+5)玻璃				注: 适配角码60132							
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
压线	CK8003	1.4mm	0.142kg/m	纱窗	80314	0.7mm	0.2kg/m	角码	60132	3.0mm	2.05kg/m
											
注: 厚度13.7mm				注: 厚度28.7mm							
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Material	Weight
角码	MDJM-80-01	2.0mm		角码	MDJM-80-02	2.0mm		玻内胶条	300653	EPDM	
											
Name	Code	Material	Weight	Name	Code	Material	Weight				
玻内胶条	300332-2	EPDM		密封胶条	7*5						

青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

JA80系列普铝-推拉型材产品图

JA80 Series Non-thermal Sliding System Window and door

五金装配图
Hardware assembly drawing

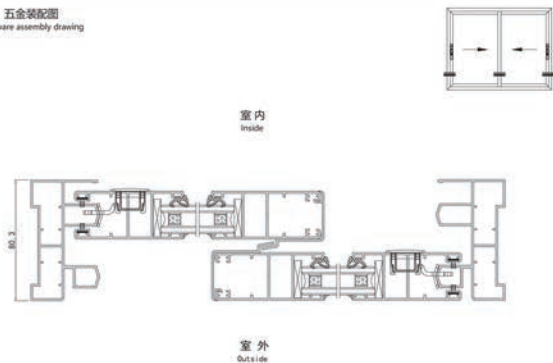

JA80H系列断桥-推拉型材产品图

JA80H Series Thermal break Sliding System Window




技术参数 PARAMETER

型材宽度 Profile width	72mm
型材壁厚 Profile thickness	1.4mm
可视面宽度 Visible surface width	外框: 51.6mm / 玻璃: 77.4mm Frame: 51.6mm / Glass fan: 77.4mm
铝材标准 Aluminum standard	6063高精级欧标铝材 6063 European standard aluminum
玻璃规格 Glass specification	5+9A+5mm中空钢化玻璃 5+9A+5mm double tempered glass
五金品牌 Hardware brand	丝吉利娅 SI
组角工艺 Angle of group technology	组角胶 撞角工艺 Adhesive corner combination
胶条材质 Strip material	EPDM汽车级密封胶条 EPDM automotive grade sealing tape
开启方式 Opening way	推拉 Sliding

JA80H系列断桥-推拉型材产品图


JA 80H Series Thermal break Sliding System Window

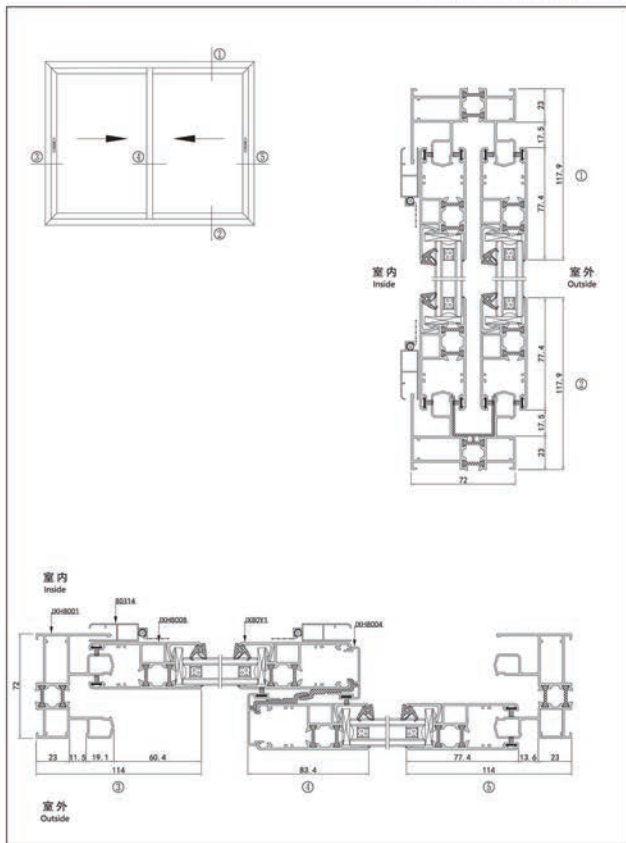


青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

JA80H系列断桥-推拉型材产品图

JA 80H Series Thermal break Sliding System Window

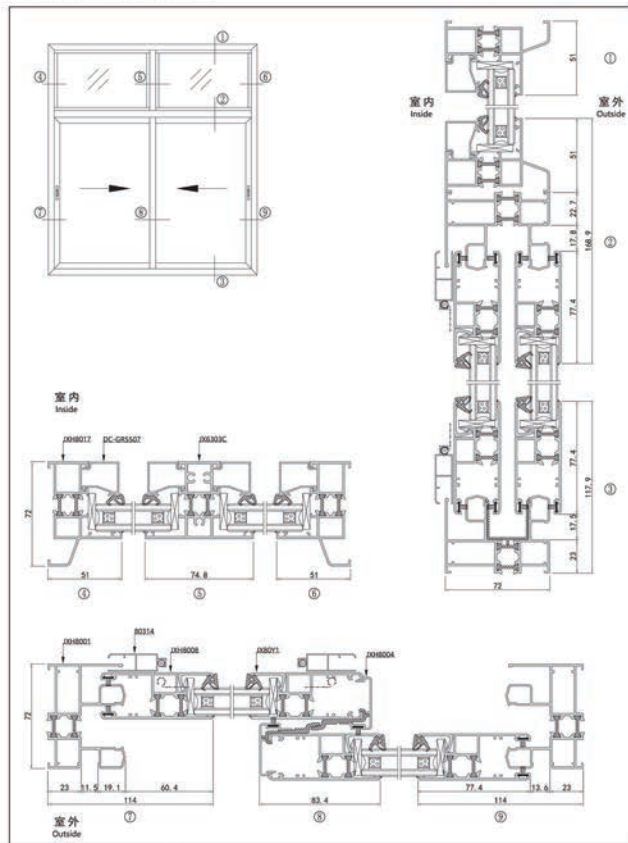


青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

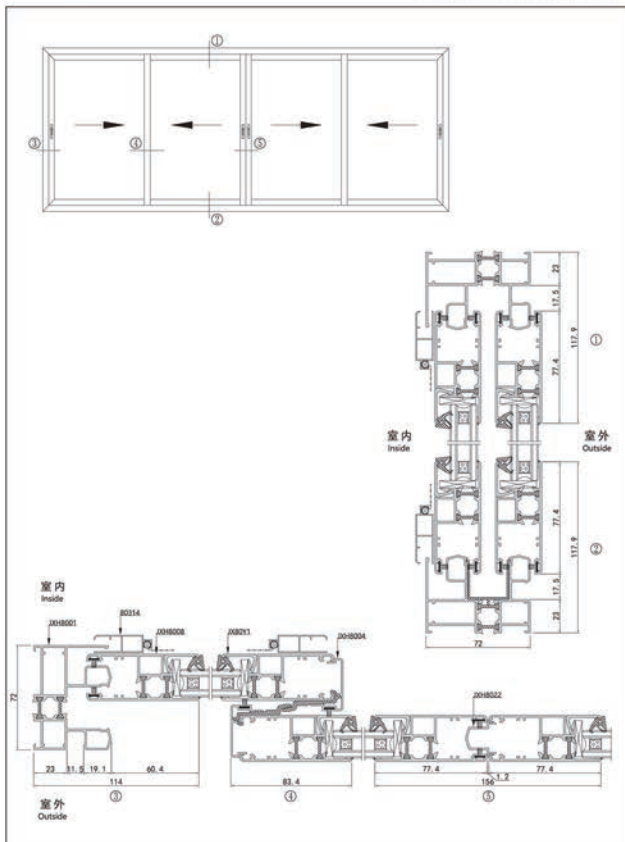



JA80H系列断桥-推拉型材产品图

JABOH Series Thermal break Sliding System Window

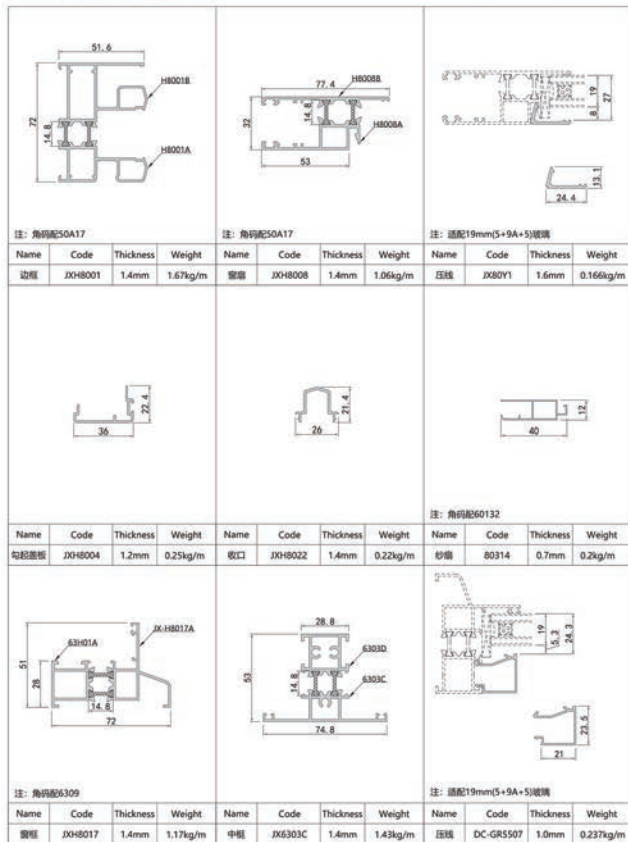

JA80H系列断桥-推拉型材产品图



JA 80H Series Thermal break Sliding System Window

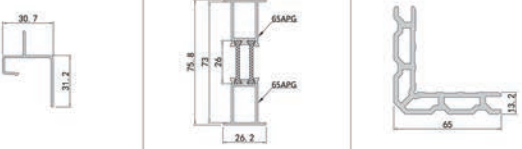				Name Code Thickness Weight				Name Code Thickness Weight				Name Code Thickness Weight			
隔热				JX65APG				60132				角码			
JX65APG				1.4mm				0.94kg/m				3.0mm			
0.33kg/m				2.05kg/m											
				Name Code Thickness Weight				Name Code Thickness Weight				Name Code Thickness Weight			
角码				6309				3.0mm				角码			
3.5mm				2.81kg/m				300331				EPDM			
2.22kg/m															
				Name Code Material Weight				Name Code Material Weight				Name Code Material Weight			
300653				EPDM				密封毛条				7*5			
0.0459kg/m															

青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

JA80H系列断桥-推拉型材产品图

JA 80H Series Thermal break Sliding System Window


				Name Code Material Weight				Name Code Material Weight				Name Code Material Weight			
隔热条				BT1200				PA66				隔热条			
0.039kg/m				BT2601				PA66				勾扣插件			
				0.078kg/m				MD80H-FJ-01				PVC			
				Name Code Material Weight				Name Code Material Weight				Name Code Material Weight			
U型槽				MD80H-FJ-02				PVC							
				Name Code Material Weight				Name Code Material Weight				Name Code Material Weight			
BT14800				PA66											
0.0459kg/m															

青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

JA80H系列断桥-推拉型材产品图


JA 80H Series Thermal break Sliding System Window

五金装配图
Hardware assembly drawing

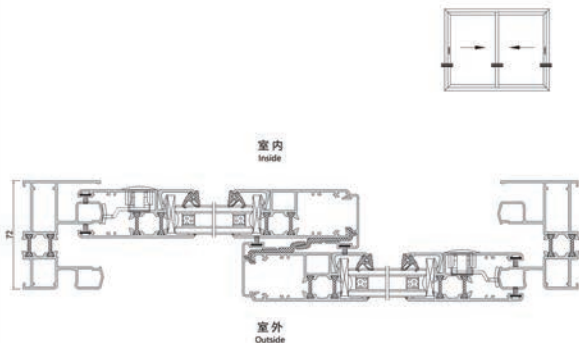

JA100系列普铝-推拉型材产品图

JA 100 Series Non-thermal Sliding System Window and door

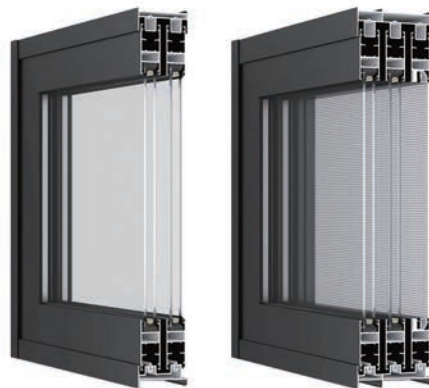


技术参数 PARAMETER

型材宽度 Profile width	100mm
型材壁厚 Profile thickness	2.0mm
可视面宽度 Visible surface width	外框: 30mm / 玻璃: 83mm Frame: 30mm / Glass fan: 83mm
铝材标准 Aluminum standard	6063高精级欧标铝材 6063 European standard aluminum
玻璃规格 Glass specification	6+12A+6mm中空钢化玻璃 6+12A+6mm double tempered glass
五金品牌 Hardware brand	希美克 CMECH
组角工艺 Angle of group technology	活动角码工艺 Adjustable corner connector
胶条材质 Strip material	EPDM汽车级密封胶条 EPDM automotive grade sealing tape
开启方式 Opening way	推拉 Sliding


JA100系列普铝-推拉型材产品图

JA 100 Series Non-thermal Sliding System Window and door

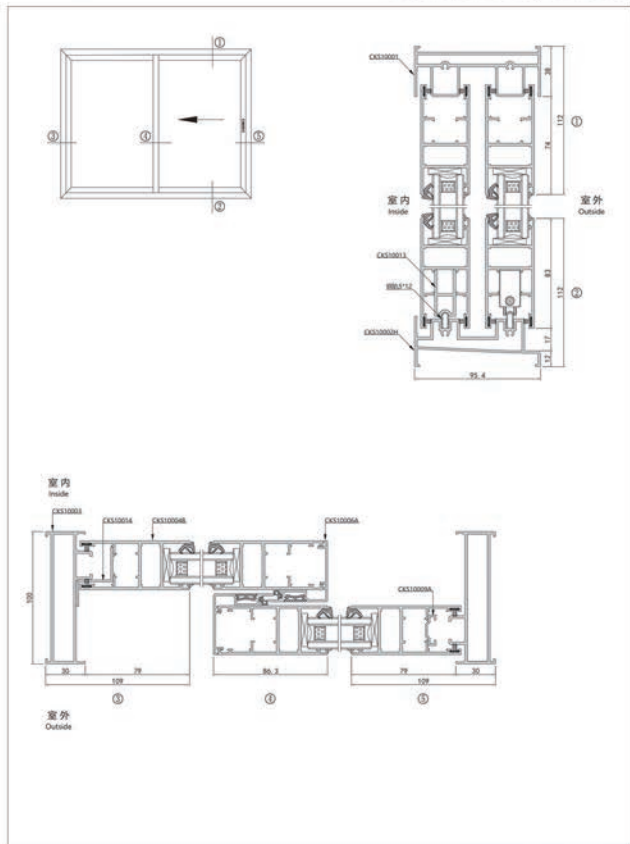


JA100系列普铝-推拉型材产品图

JA 100 Series Non-thermal Sliding System Window and door

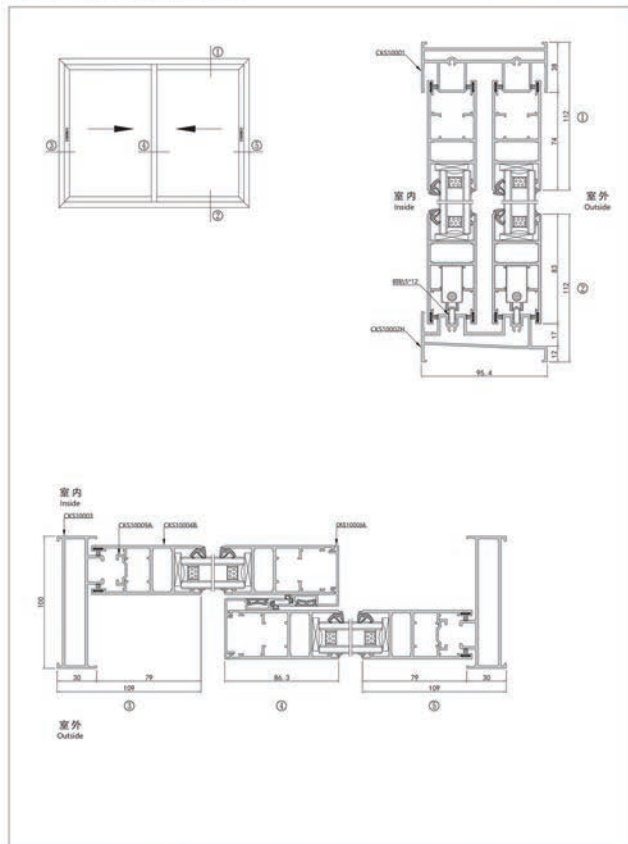

JA100系列普铝-推拉型材产品图


JA 100 Series Non-thermal Sliding System Window and door

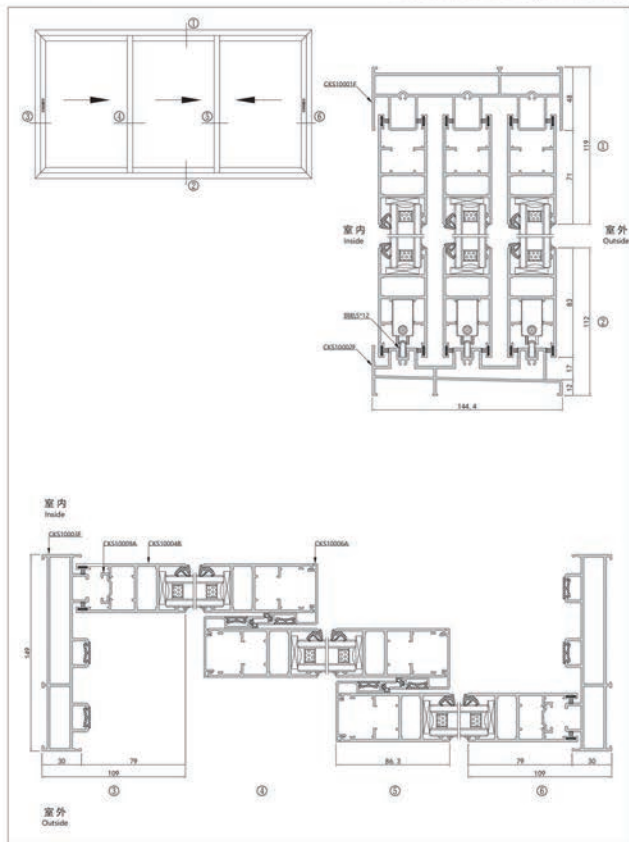






青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

JA100系列普铝-推拉型材产品图

JA 100 Series Non-thermal Sliding System Window and door

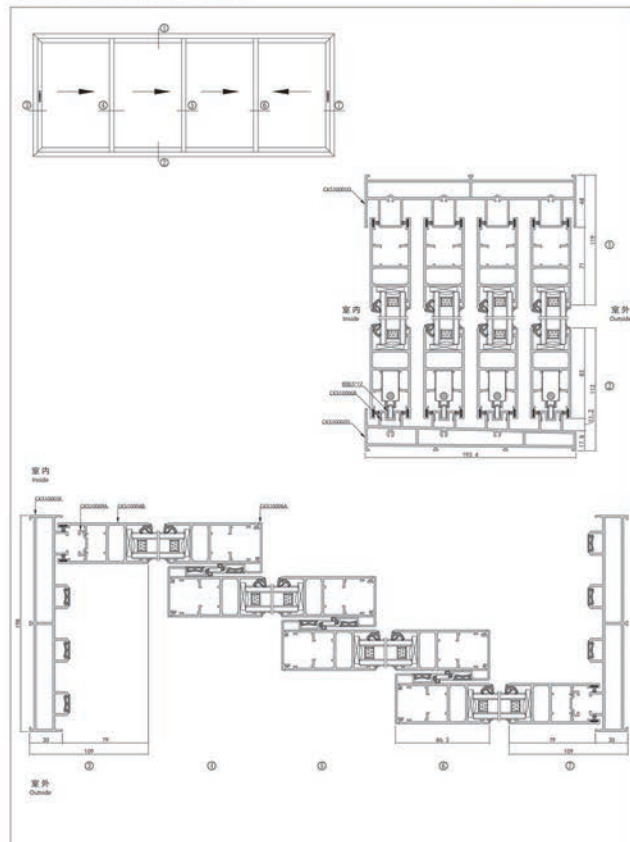

青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

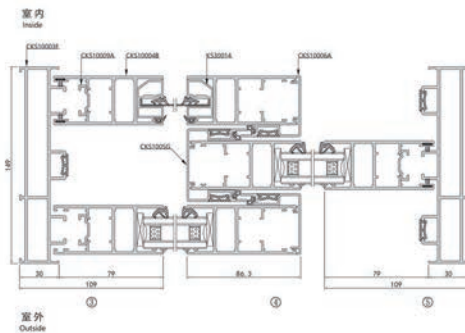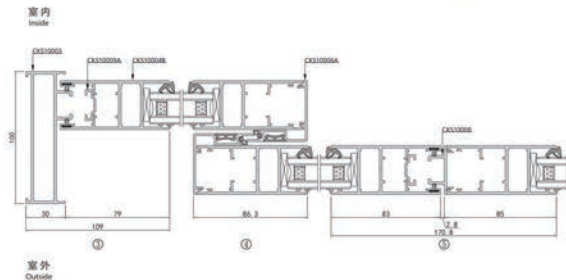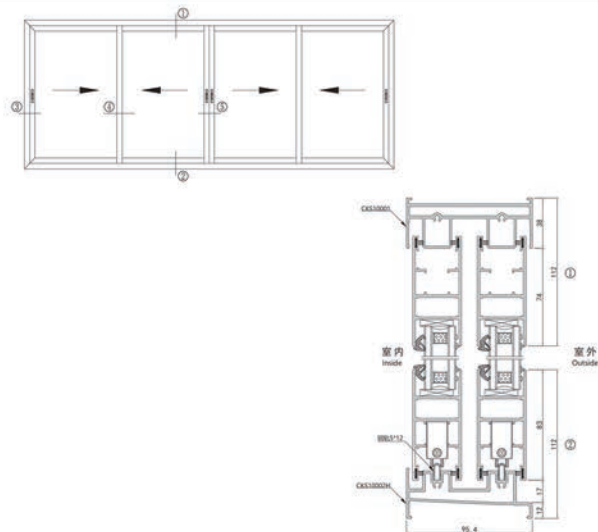


JA100系列普铝-推拉型材产品图

JA 100 Series Non-thermal Sliding System Window and door




JA100系列普铝-推拉型材产品图

JA 100 Series Non-thermal Sliding System Window and door




Name	Code	Thickness	Weight
两轨上滑	CKS10001	2.0mm	1.97kg/m




Name	Code	Thickness	Weight
两轨下滑	CKS10002H	2.0mm	1.647kg/m




Name	Code	Thickness	Weight
两轨边封	CKS10003	2.0mm	1.512kg/m



Name	Code	Thickness	Weight
三轨上滑	CKS10001F	2.0mm	3.067kg/m



Name	Code	Thickness	Weight
三轨下滑	CKS10002F	2.0mm	2.471kg/m



Name	Code	Thickness	Weight
三轨边封	CKS10003F	2.0mm	2.458kg/m

Name	Code	Thickness	Weight
四轨上滑	CKS10001D	2.0mm	3.918kg/m

注：适配24mm(6+12A+6)玻璃

注：配角码MD/M-80-01


Name	Code	Thickness	Weight
扇料	CKS10004B	2.0mm	1.409kg/m


Name	Code	Thickness	Weight
四轨下滑	CKS10002D	2.0mm	3.263kg/m



Name	Code	Thickness	Weight
勾起盖板	CKS10006A	1.5mm	0.473kg/m

Name	Code	Thickness	Weight
四轨边封	CKS10003E	2.0mm	3.134kg/m

Name	Code	Thickness	Weight
双勾起	CKS10005G	1.5mm	0.785kg/m

											
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
盖板	CKS10006B	1.8mm	0.203kg/m	收口	CKS10008	2.0mm	0.377kg/m	插件	CKS10013	2.0mm	0.528kg/m
											
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
侧盖	CKS10009A	1.4mm	0.157kg/m	转角收口	CKS10010	3.0mm	1.279kg/m	固定板	CKS10014	2.0mm	0.328kg/m
											
注：适配6-12mm玻璃											
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
单玻组件	CKS10020	2.0mm	0.34kg/m	纱窗	KS30014	1.2mm	0.427kg/m	不锈钢轨	5*12	1.0mm	


											
注: 厚度28.5mm											
Name	Code	Thickness	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
角码	MDJM-80-01			窗内胶条	300731	EPDM		纱网内胶条	300452	EPDM	
											
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
纱窗外胶条	300979	EPDM		密封胶条	301785	EPDM		密封胶条	200139	EPDM	
											
Name	Code	Material	Weight	Name	Code	Material	Weight				
防虫条	101214	EPDM		密封毛条	7*5						

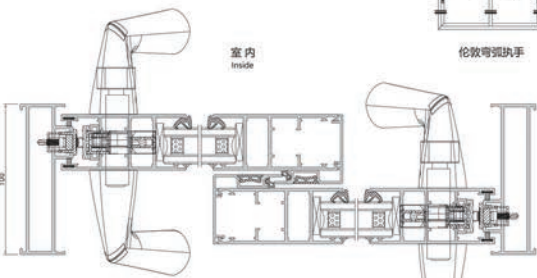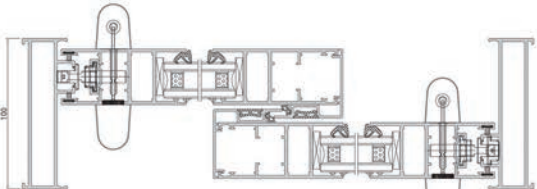五金装配图 Hardware assembly drawing											
				室内 Inside				伦敦号弧执手			
				室外 Outside							
五金装配图 Hardware assembly drawing											
				室内 Inside				平移执手			
				室外 Outside							

JA100系列普铝-推拉型材产品图

JA100 Series Non-thermal Sliding System Window and door

五金装配图
Hardware assembly drawing

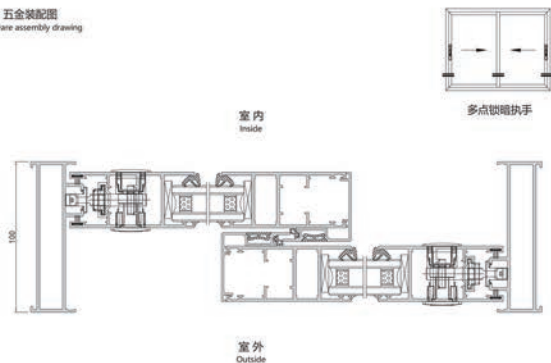

五金装配图
Hardware assembly drawing



JA100H系列断桥-推拉型材产品图

JA100H Series Thermal break Sliding System Window and door




技术参数 PARAMETER

型材宽度 Profile width	100mm
型材壁厚 Profile thickness	2.0mm
可视面宽度 Visible surface width	外框: 30mm / 玻璃: 83mm Frame: 30mm / Glass fan: 83mm
铝材标准 Aluminum standard	6063高精级欧标铝材 6063 European standard aluminum
玻璃规格 Glass specification	6+12A+6mm中空钢化玻璃 6+12A+6mm double tempered glass
五金品牌 Hardware brand	希美克 CMECH
组角工艺 Angle of group technology	组角胶 撞角工艺 Adhesive corner combination
胶条材质 Strip material	EPDM汽车级密封胶条 EPDM automotive grade sealing tape
开启方式 Opening way	推拉 Sliding

JA100H系列断桥-推拉型材产品图


JA 100H Series Thermal break Sliding System Window and door

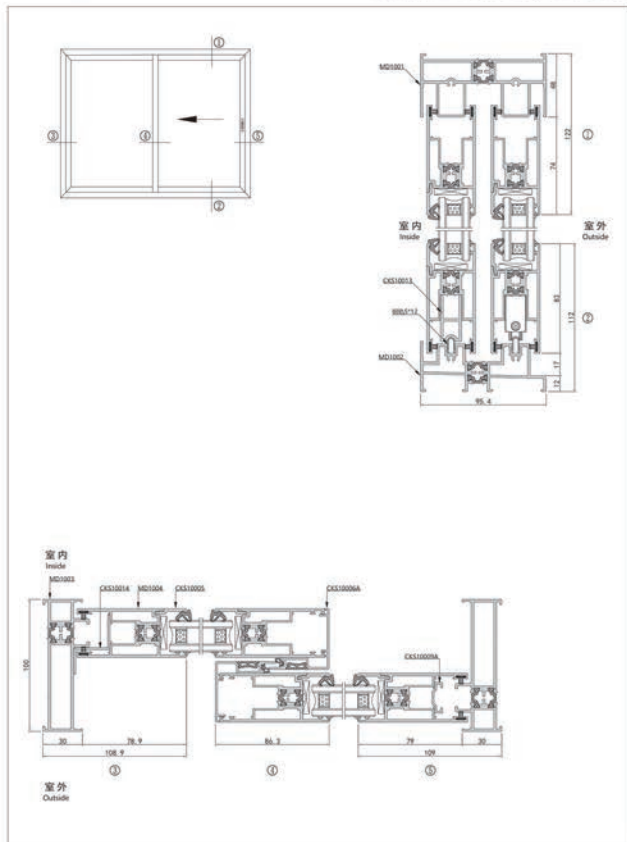

青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

JA100H系列断桥-推拉型材产品图


JA 100H Series Thermal break Sliding System Window and door

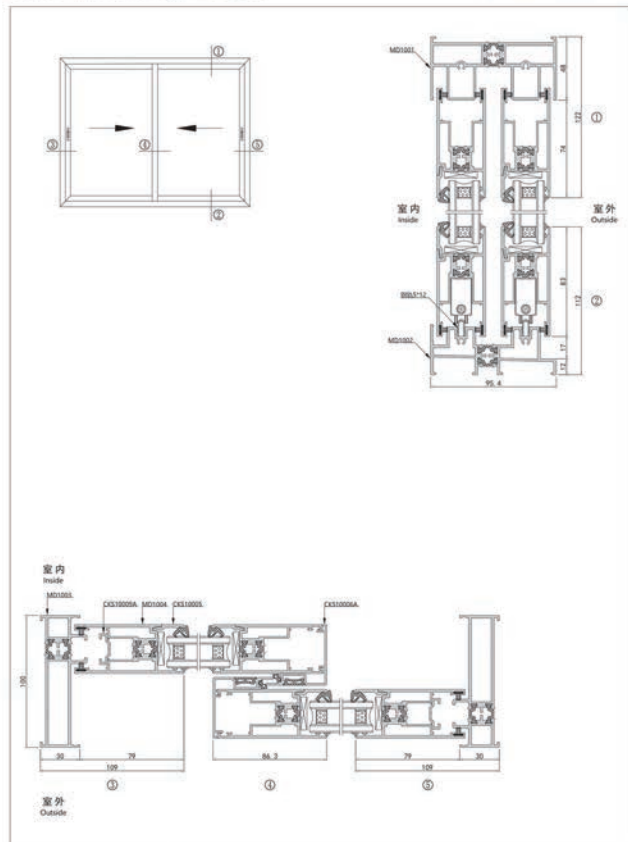

青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

JA100H系列断桥-推拉型材产品图


JA 100H Series Thermal break Sliding System Window and door

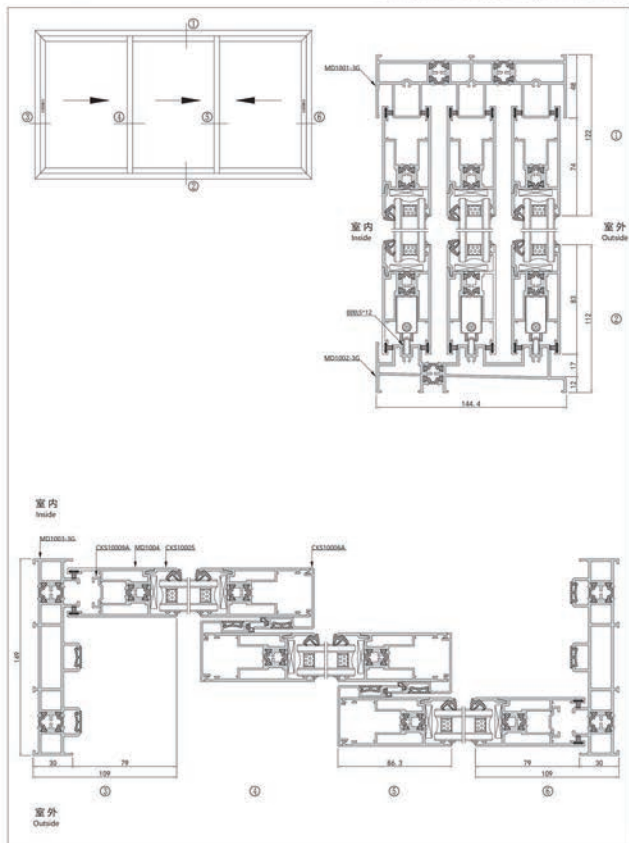





青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

JA100H系列断桥-推拉型材产品图

JA 100H Series Thermal break Sliding System Window and door

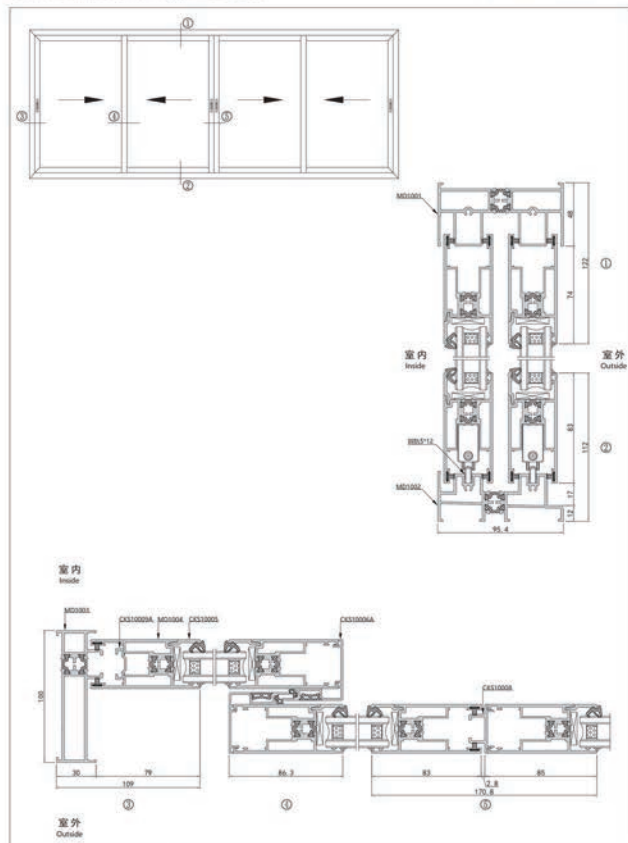


青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

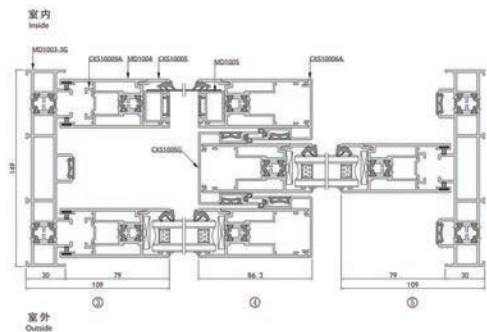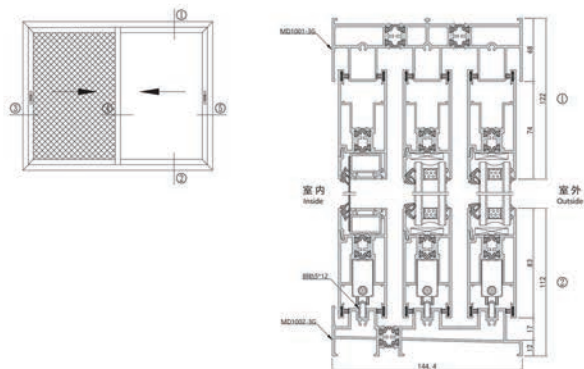


JA100H系列断桥-推拉型材产品图


JA 100H Series Thermal break Sliding System Window and door




Name	Code	Thickness	Weight
两轨上滑	MD1001	2.0mm	2.406kg/m




Name	Code	Thickness	Weight
两轨下滑	MD1002	2.0mm	2.01kg/m




Name	Code	Thickness	Weight
两轨边封	MD1003	2.0mm	1.813kg/m



Name	Code	Thickness	Weight
三轨上滑	MD1001-3G	2.0mm	3.622kg/m




Name	Code	Thickness	Weight
三轨下滑	MD1002-3G	2.0mm	2.73kg/m



Name	Code	Thickness	Weight
三轨边封	MD1003-3G	2.0mm	3.164kg/m

JA100H系列断桥-推拉型材产品图


JA 100H Series Thermal break Sliding System Window and door



Name	Code	Thickness	Weight
磨料	MD1004	2.0mm	1.69kg/m



Name	Code	Thickness	Weight
勾起盖板	CKS10006A	1.5mm	0.473kg/m



Name	Code	Thickness	Weight
双勾起	CKS10005G	1.5mm	0.785kg/m



Name	Code	Thickness	Weight
盖板	CKS10006B	1.8mm	0.203kg/m




Name	Code	Thickness	Weight
收口	CKS10008	2.0mm	0.377kg/m



Name	Code	Thickness	Weight
插件	CKS10013	2.0mm	0.528kg/m




Name	Code	Thickness	Weight
铝条	CKS10009A	1.4mm	0.157kg/m



Name	Code	Thickness	Weight
转角收口	CKS10010	3.0mm	1.279kg/m





Name	Code	Thickness	Weight
固定板	CKS10014	2.0mm	0.328kg/m



注：透玻24mm(6+12A+6)玻璃

Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
砂磨件	MD1005	1.4mm	0.35kg/m	不锈钢轨	5*12	1.0mm		压线	CKS10005	2.0mm	0.144kg/m



Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Material	Weight
角码	30.1*6.8	2.0mm		角码	34.3*6.8	2.0mm		塘内胶条	300731	EPDM	



Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
砂管内胶条	300452	EPDM		密封胶条	301785	EPDM		密封胶条	200139	EPDM	

JA100H系列断桥-推拉型材产品图

JA 100H Series Thermal break Sliding System Window and door



Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
防尘条	101214	EPDM		防尘条	101126	EPDM		密封毛条	7*5		



Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
隔热条	BT14801	PA66	0.056kg/m	隔热条	BT1201	PA66	0.049kg/m				


Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight

JA100H系列断桥-推拉型材产品图

JA 100H Series Thermal break Sliding System Window and door


五金装配图

Hardware assembly drawing

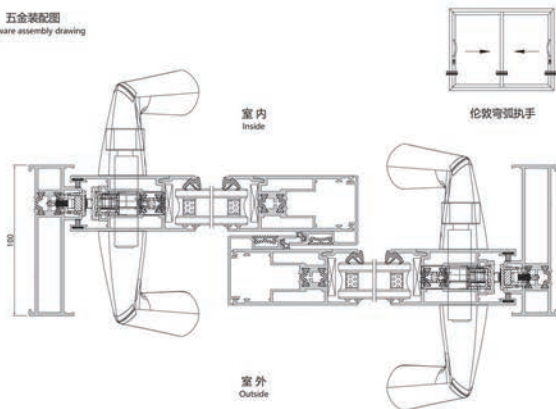

五金装配图

Hardware assembly drawing

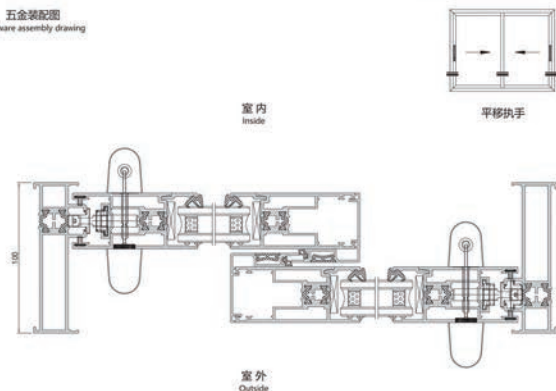


JA100H系列断桥-推拉型材产品图

JA 100H Series Thermal break Sliding System Window and door


五金装配图


Hardware assembly drawing

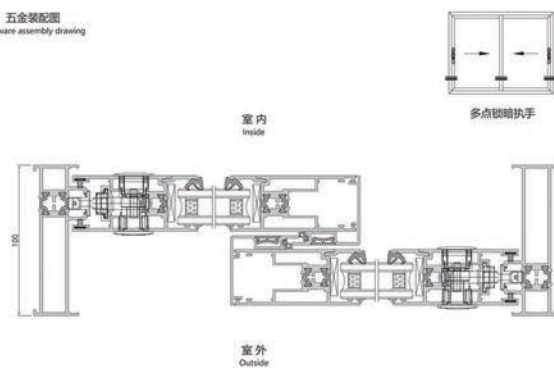

五金装配图


Hardware assembly drawing

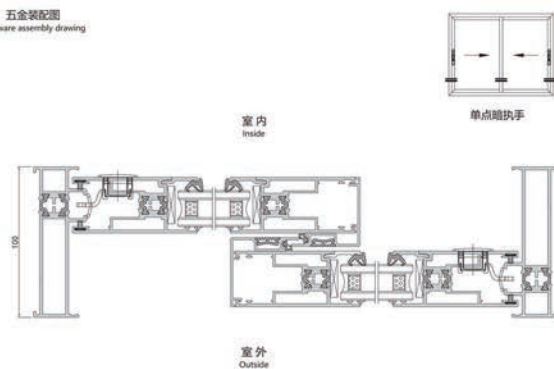

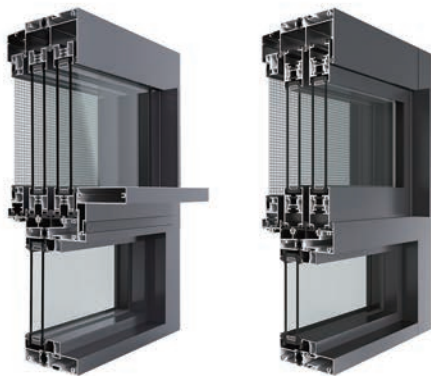


技术参数 PARAMETER

型材宽度 Profile width	110mm
型材壁厚 Profile thickness	2.0mm
可视面宽度 Visible surface width	外框: 52mm / 玻璃: 34mm Frame: 52mm / Glass fan: 34mm
铝材标准 Aluminum standard	6063 高精级欧标铝材 6063 European standard aluminum
玻璃规格 Glass specification	5+15A+5mm 中空钢化玻璃 / 5+20A+5mm 中空钢化玻璃 5+15A+5mm double tempered glass / 5+20A+5mm double tempered glass
五金品牌 Hardware brand	希美克 CMECH
组角工艺 Angle of group technology	组角胶 撞角工艺 Adhesive corner combination
胶条材质 Strip material	EPDM 汽车级密封胶条 EPDM automotive grade sealing tape
开启方式 Opening way	推拉 Sliding

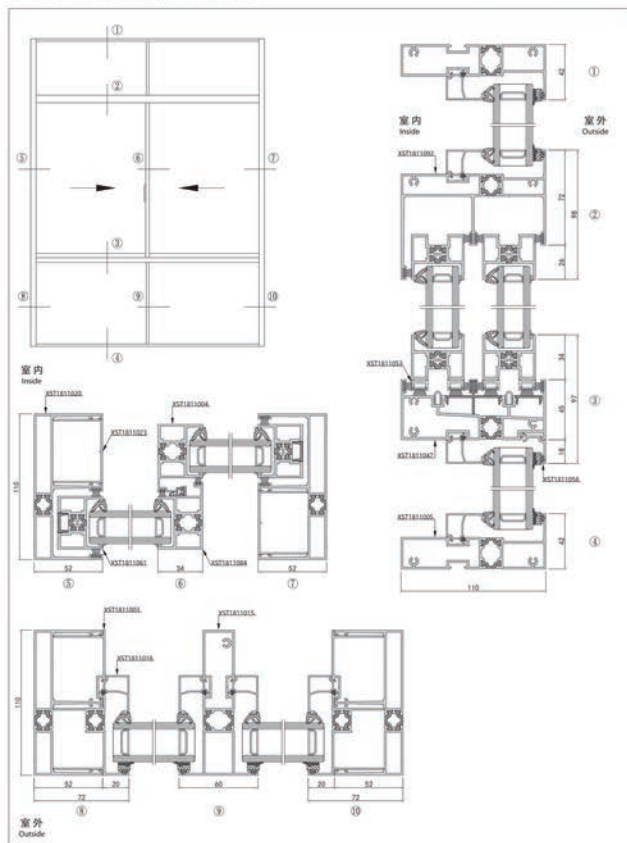

JA110系列断桥-推拉型材产品图


JA110 Series Thermal break Sliding System Window and door

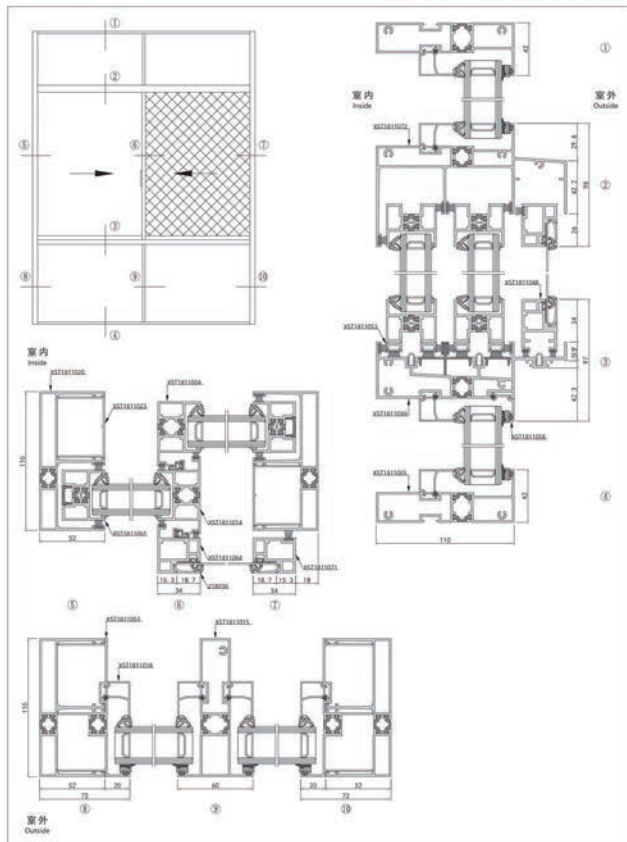



青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd



JA110系列断桥-推拉型材产品图



JA110 Series Thermal break Sliding System Window and door


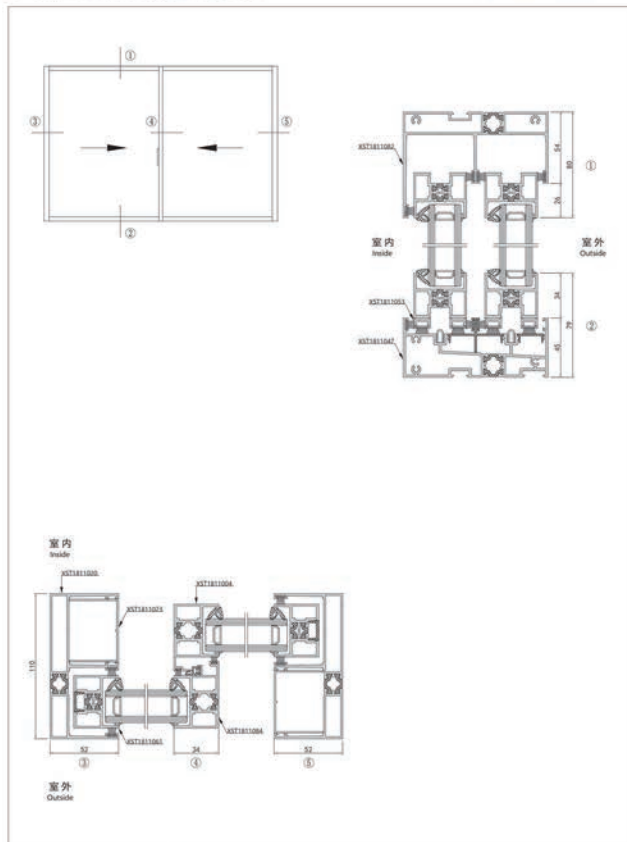



青岛雅斤工贸有限公司
Qingdao Jachin Industry and Trade Co., Ltd

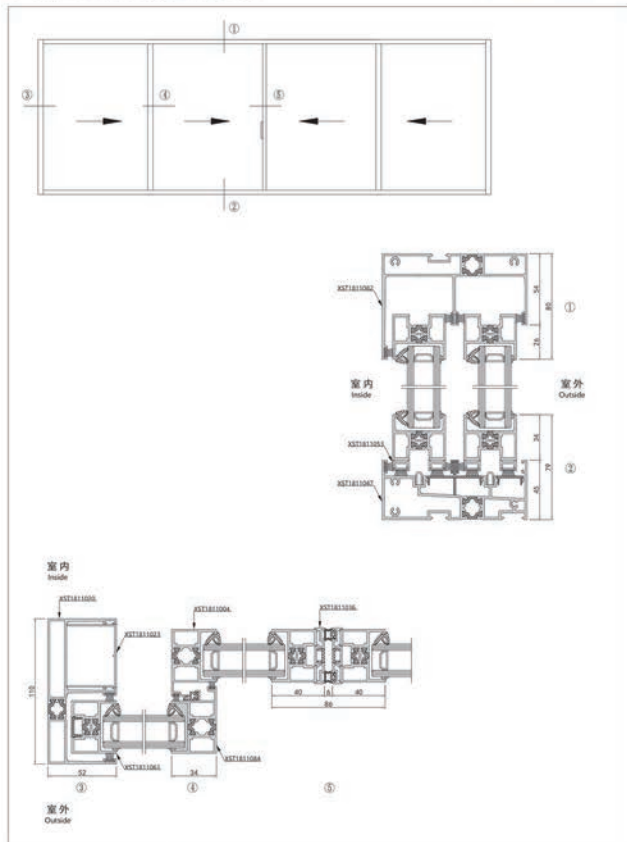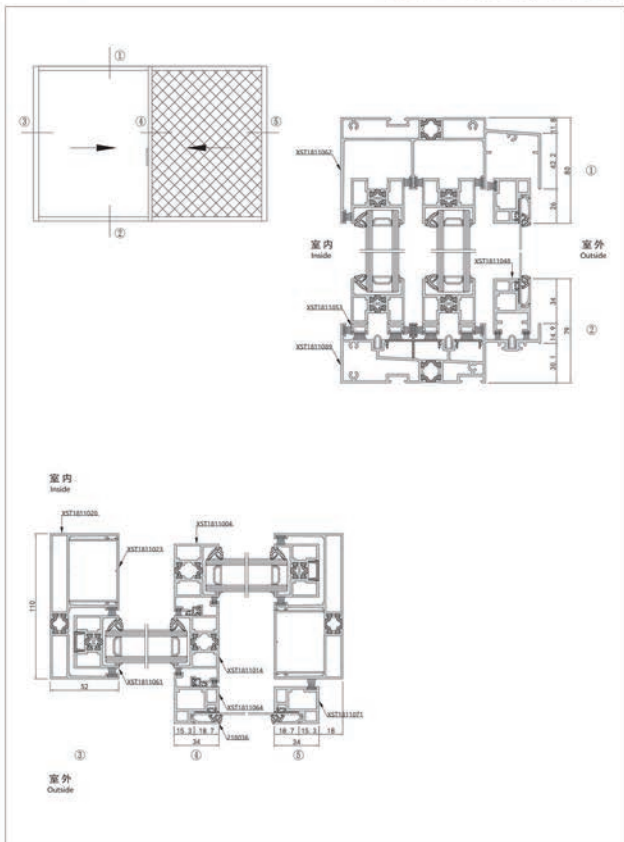

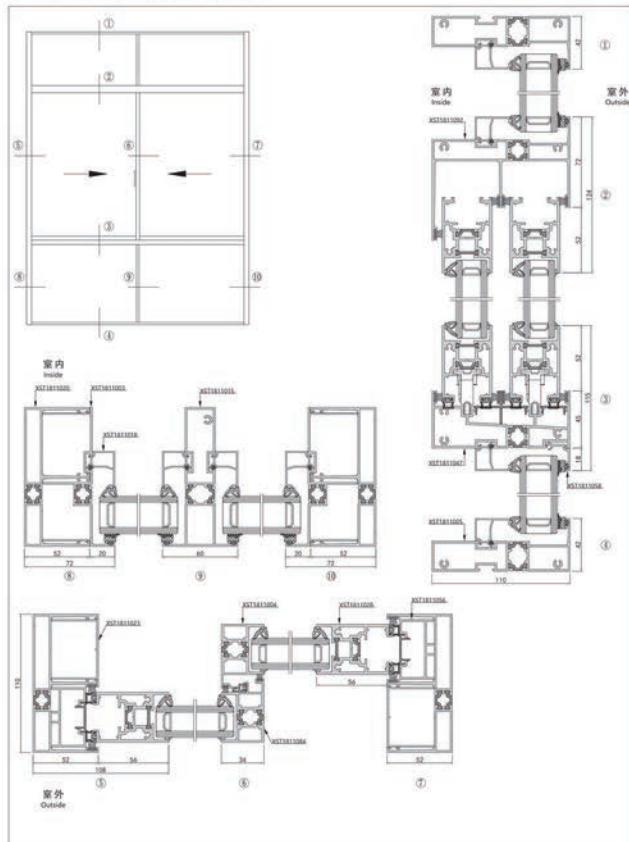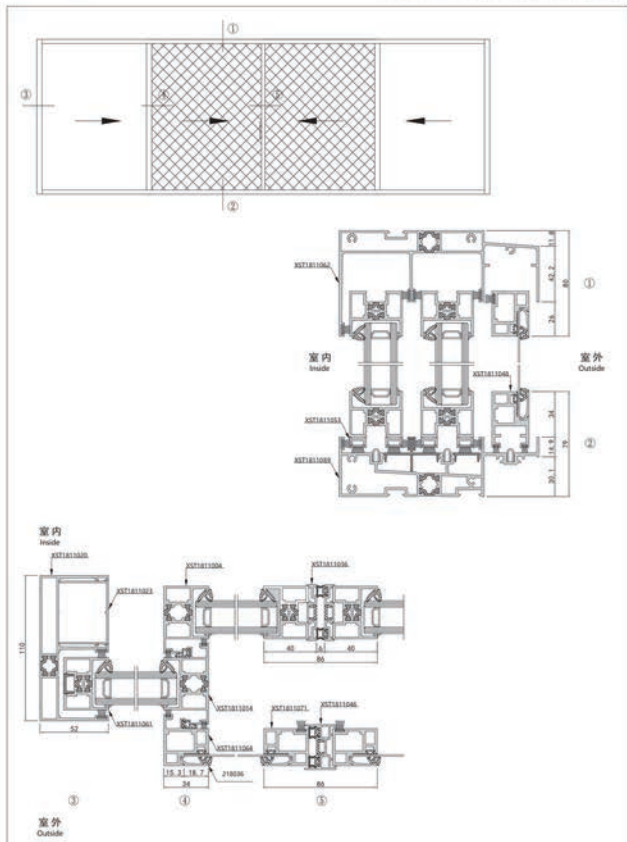

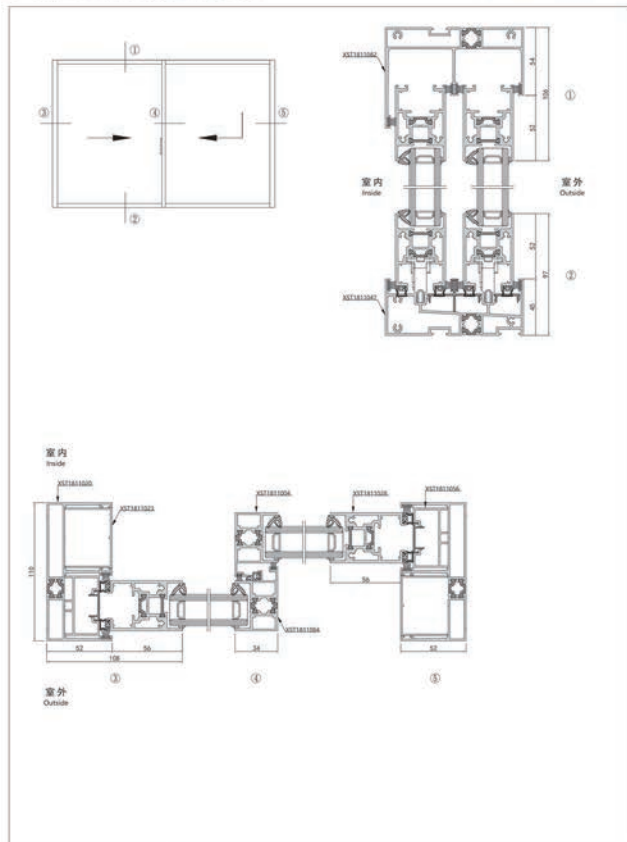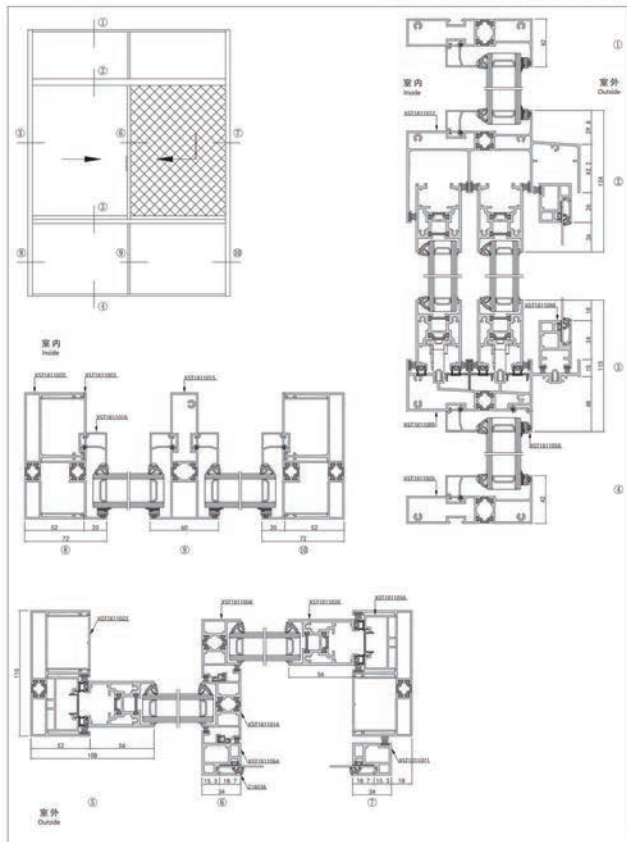


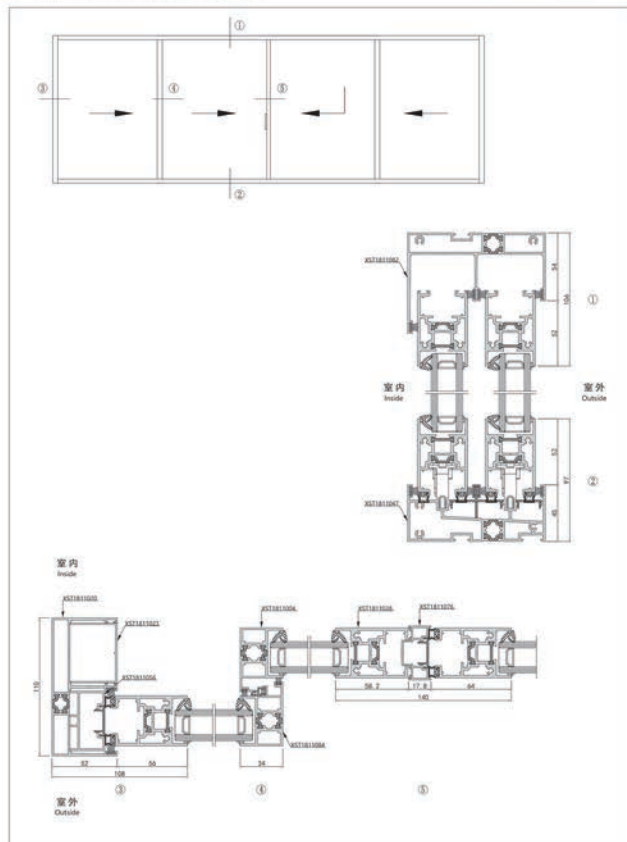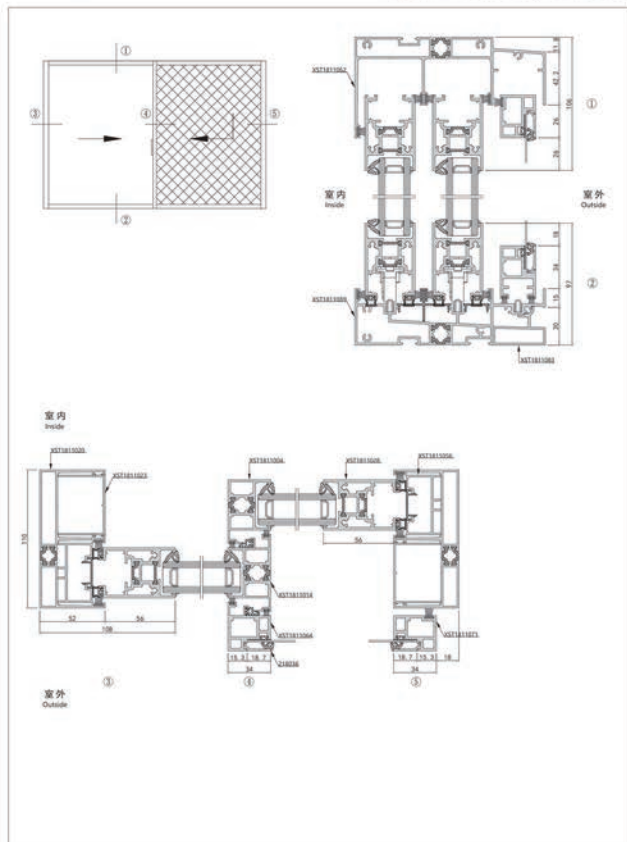

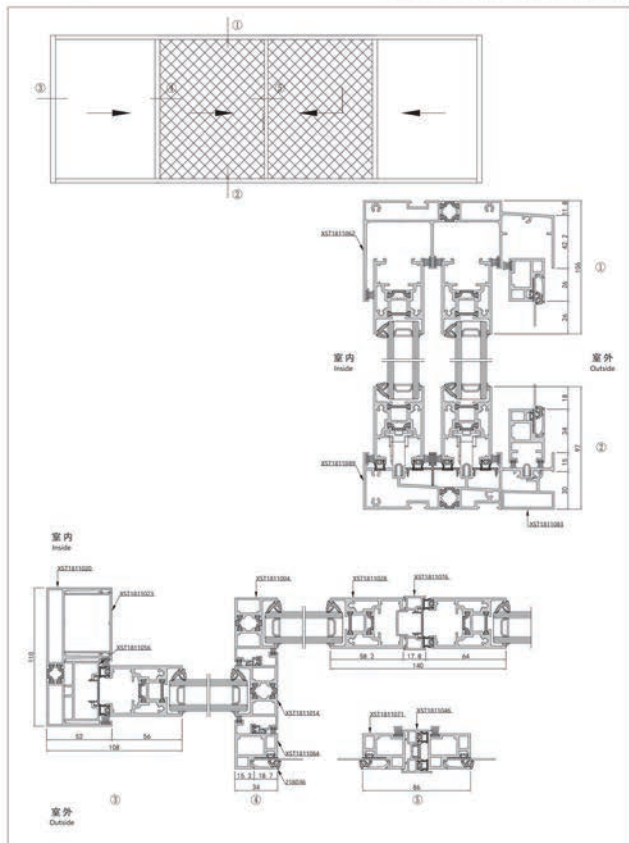



JA110系列断桥-推拉型材产品图



JA 110 Series Thermal break Sliding System Window and door


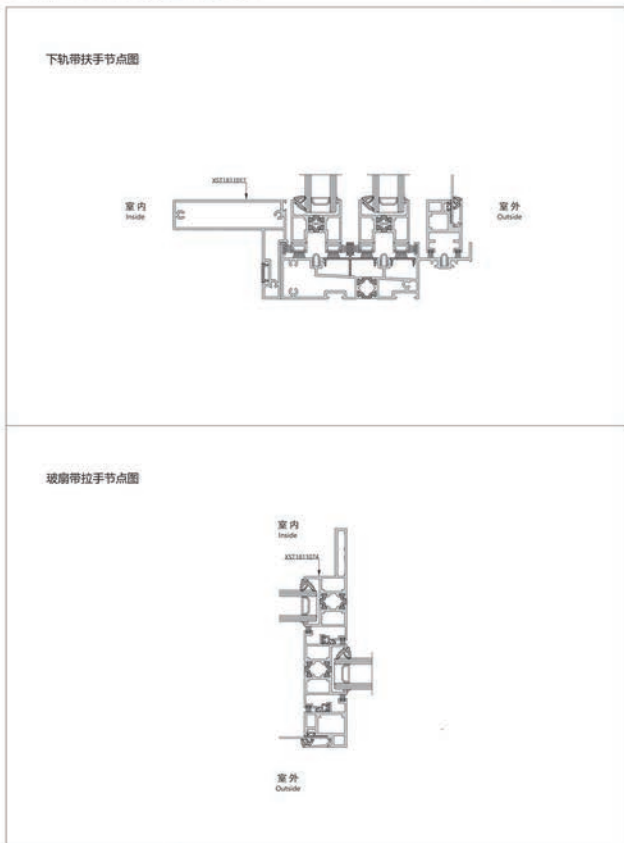


JA110系列断桥-推拉型材产品图

JA110 Series Thermal break Sliding System Window and door

			
Name	Code	Thickness	Weight
上轨	XST1811062	2.0mm	2.727kg/m

			
Name	Code	Thickness	Weight
固定上轨	XST1811072	2.0mm	2.806kg/m

			
Name	Code	Thickness	Weight
上轨	XST1811082	1.5mm	2.238kg/m







			
Name	Code	Thickness	Weight
固定上轨	XST1811092	1.5mm	2.316kg/m



Name	Code	Thickness	Weight
下轨	XST1811009	1.8mm	2.792kg/m

Name	Code	Thickness	Weight
下轨	XST1811047	1.8mm	2.354kg/m



JA110系列断桥-推拉型材产品图

JA110 Series Thermal break Sliding System Window and door

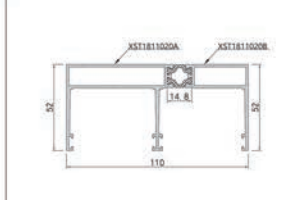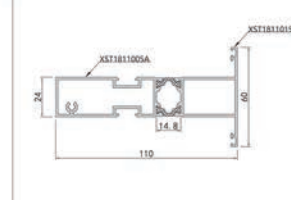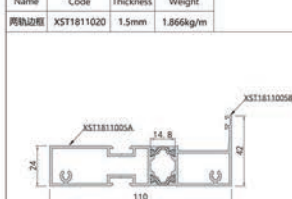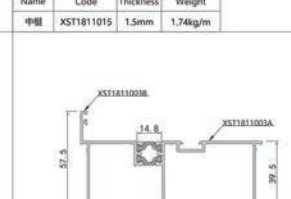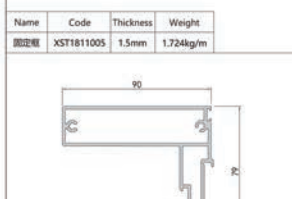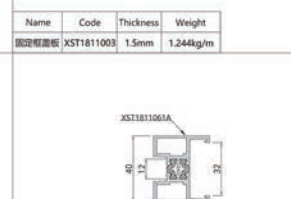																			
<table border="1"> <thead> <tr> <th>Name</th> <th>Code</th> <th>Thickness</th> <th>Weight</th> </tr> </thead> <tbody> <tr> <td>两轨边框</td> <td>XST1811020</td> <td>1.5mm</td> <td>1.866kg/m</td> </tr> </tbody> </table>		Name	Code	Thickness	Weight	两轨边框	XST1811020	1.5mm	1.866kg/m	注: A面角码配5035 B面角码配5049 <table border="1"> <thead> <tr> <th>Name</th> <th>Code</th> <th>Thickness</th> <th>Weight</th> </tr> </thead> <tbody> <tr> <td>中框</td> <td>XST1811015</td> <td>1.5mm</td> <td>1.74kg/m</td> </tr> </tbody> </table>		Name	Code	Thickness	Weight	中框	XST1811015	1.5mm	1.74kg/m
Name	Code	Thickness	Weight																
两轨边框	XST1811020	1.5mm	1.866kg/m																
Name	Code	Thickness	Weight																
中框	XST1811015	1.5mm	1.74kg/m																
																			
<table border="1"> <thead> <tr> <th>Name</th> <th>Code</th> <th>Thickness</th> <th>Weight</th> </tr> </thead> <tbody> <tr> <td>固定框</td> <td>XST1811005</td> <td>1.5mm</td> <td>1.724kg/m</td> </tr> </tbody> </table>		Name	Code	Thickness	Weight	固定框	XST1811005	1.5mm	1.724kg/m	<table border="1"> <thead> <tr> <th>Name</th> <th>Code</th> <th>Thickness</th> <th>Weight</th> </tr> </thead> <tbody> <tr> <td>固定框盖板</td> <td>XST1811003</td> <td>1.5mm</td> <td>1.244kg/m</td> </tr> </tbody> </table>		Name	Code	Thickness	Weight	固定框盖板	XST1811003	1.5mm	1.244kg/m
Name	Code	Thickness	Weight																
固定框	XST1811005	1.5mm	1.724kg/m																
Name	Code	Thickness	Weight																
固定框盖板	XST1811003	1.5mm	1.244kg/m																
																			
<table border="1"> <thead> <tr> <th>Name</th> <th>Code</th> <th>Thickness</th> <th>Weight</th> </tr> </thead> <tbody> <tr> <td>下轨扶手</td> <td>XST1811017</td> <td>1.0mm</td> <td>1.97kg/m</td> </tr> </tbody> </table>		Name	Code	Thickness	Weight	下轨扶手	XST1811017	1.0mm	1.97kg/m	注: 总配25mm(5+15A+5)玻璃 注: A面角码配5031 <table border="1"> <thead> <tr> <th>Name</th> <th>Code</th> <th>Thickness</th> <th>Weight</th> </tr> </thead> <tbody> <tr> <td>玻璃光企</td> <td>XST1811061</td> <td>2.0mm</td> <td>1.036kg/m</td> </tr> </tbody> </table>		Name	Code	Thickness	Weight	玻璃光企	XST1811061	2.0mm	1.036kg/m
Name	Code	Thickness	Weight																
下轨扶手	XST1811017	1.0mm	1.97kg/m																
Name	Code	Thickness	Weight																
玻璃光企	XST1811061	2.0mm	1.036kg/m																



Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
玻面单勾	XST1811004	2.0mm	1.143kg/m	玻面单勾	XST1811084	2.0mm	1.172kg/m	玻面双勾	XST1811014	2.0mm	1.261kg/m



注：A型鱼药配5034


注：角码配5032

Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
碳纖維手 機殼	XST1811074	2.0mm	1.568kg/m	提升光企	XST1811028	2.0mm	1.772kg/m	砂網光企	XST1811071	2.0mm	0.832kg/m



注：角碼配5033

Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
炒麵勾企	XST1811064	2.0mm	0.943kg/m	炒麵勾企 下方	XST1811048	2.0mm	0.967kg/m	炒麵勾企 下方	XST1811053	1.4mm	0.104kg/m



注：选配30mm(S+20A+S)玻璃


Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
固定压线	XST1811018	1.0mm	0.263kg/m	下挂室外线	XST1811058	1.5mm	0.186kg/m	砂网压线	218036	1.4mm	0.104kg/m



Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
边框盖板	XST1811023	1.4mm	0.423kg/m	铝槽	XST1811056	1.4mm	0.578kg/m	门下脚垫	XST1811083	1.6mm	0.601kg/m




Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
破洞收口	XST1811036	1.4mm	0.309kg/m	提升扇收口	XST1811076	1.3mm	0.47g/m	纱扇收口	XST1811046	1.2mm	0.435g/m



											
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
铝轨	5*10			角码	5031	17.5*8.9		角码	5034	9.5*12.8	
											
Name	Code	Thickness	Weight	Name	Code	Thickness	Weight	Name	Code	Thickness	Weight
角码	5032	20.7*12.3		角码	5033	20.7*12.3 异型		连接件	5035	45.1*10.7	
											
				注：用于固定玻内				注：用于开启扇玻内			
Name	Code	Thickness	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
连接件	5049	30*20.6		玻内胶条	300731	EPDM		玻内胶条	300332-2	EPDM	

											
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
注：用于金钢网、尼龙高弹网的安装				注：用于高弹金钢网的安装							
纱网胶条	B220022	EPDM		纱网胶条	22062	EPDM		玻外胶条	B220054	EPDM复合	
											
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
压线胶条	220034	EPDM复合		纱网垫片胶条	B220039	EPDM		包边胶条	BT11004	EPDM	
											
								注：用于边缘、上轨、下轨			
Name	Code	Material	Weight	Name	Code	Thickness	Weight	Name	Code	Material	Weight
提升扇胶条	GA31	EPDM复合		收口胶条	B46008	EPDM		毛条7*7	5037		

											
注：用于勾扣。纱窗下方				注：用于玻璃下方				注：用于纱窗光企			
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
毛条4*6	5038			毛条10*6	5039			毛条7*8	220058		
											
								注：用于垂直向光企槽口			
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
高弹纱网卡件	321025	PVC		压网胶条	YK159	PVC		玻璃装饰盖	3399-XS-GA30	TPV	
											
注：用于下轨装饰											
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
下轨道板A	T11003	PVC		玻璃封盖	321012	PVC		C槽封盖	3399-XS-GA27	TPV	


											
注：用于下轨装饰											
Name	Code	Thickness	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
下轨道板B	T11013	PVC		隔热条	BT14801	PA66	0.056kg/m	隔热条	BT1201	PA66	0.049kg/m
											
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight
隔热条	BT1801	PA66	0.064kg/m	隔热条	BT1800	PA66	0.054kg/m				
Name	Code	Material	Weight	Name	Code	Material	Weight	Name	Code	Material	Weight

					Name	A (mm)	B (mm)	T (mm)	Weight(kg/m)
					JL30X20	30	20	1.1/1.3	0.146/0.183
						30	20	1.7/2.0	0.217/0.260
						30	20	3.0	0.381
					JL30X30	30	30	0.6/0.8	0.105/0.125
						30	30	1.0/1.2	0.150/0.197
						30	30	1.5/2.0	0.216/0.333
						30	30	3.0/4.0	0.462/0.617
						30	30	4.5	0.674
Name	A (mm)	B (mm)	T (mm)	Weight(kg/m)	JL35X15	35	15	2.0	0.260
JL10X10	10	10	0.8/1.0	0.035/0.051	JL35X25	35	25	4.0	0.605
	10	10	1.2	0.061	JL35X28	35	28	3.0	0.486
JL12X12	12	12	1.0	0.060	JL38X25	38	25	3.0	0.486
JL15X15	15	15	0.8/1.3	0.066/0.101	JL38X38	38	38	0.8/1.0	0.158/0.200
	15	15	1.5/2.0	0.108/0.166		38	38	1.5/2.0	0.300/0.408
JL20X12	20	12	0.8	0.070		38	38	3.0/4.0	0.558/0.775
JL20X14	20	14	2.0	0.167	JL39X39	39	39	1.2	0.233
JL20X15	20	15	2.6	0.227	JL40X20	40	20	2.0/3.0	0.316/0.450
JL20X20	20	20	1.0/1.5	0.108/0.150	JL40X22	40	22	2.5	0.402
	20	20	1.9/2.0	0.196/0.206	JL40X30	40	30	3.0	0.543
	20	20	3.0	0.308	JL40X35	40	35	3.0	0.587
JL25X10	25	10	2.0	0.180	JL40X40	40	40	1.2/2.0	0.256/0.422
JL25X15	25	15	1.5/2.0	0.133/0.200		40	40	3.5	0.723
JL25X23	25	23	1.5	0.198	JL45X16	45	16	3.0	0.470
JL25X25	25	25	0.6/0.8	0.083/0.108	JL45X25	45	25	3.0	0.543
	25	25	1.0/1.2	0.133/0.150	JL48X20	48	20	1.5	0.270
	25	25	1.5/2.0	0.208/0.242	JL50X20	50	20	5.0	0.878
	25	25	3.0	0.381	JL50X28	50	28	3.0	0.608
JL25X27	25	27	2.5	0.335	JL50X30	50	30	1.0/3.0	0.200/0.610
JL27X17	27	17	2.0	0.227		50	30	4.0	0.821
JL28X28	28	28	2.7	0.389	JL50X40	50	40	5.0	1.148
JL29X29	29	29	2.7	0.404	JL50X50	50	50	1.0/1.5	0.250/0.395
JL30X12	30	12	2.0	0.216		50	50	2.0/3.0	0.500/0.750
						50	50	4.0/5.0	1.033/1.250
						50	50	6.0	1.617

									
Name	A (mm)	B (mm)	T (mm)	Weight(kg/m)	Name	A (mm)	B (mm)	T (mm)	Weight(kg/m)
JL55X55	55	55	2.0	0.583	CL10X10	10	10	0.8/0.9	0.050/0.069
JL60X40	60	40	2.0	0.530		10	10	1.0	0.100
JL60X55	60	55	6.0	1.738	CL11X18	11	18	0.6	0.063
JL60X60	60	60	2.0/4.0	0.608/1.200	CL12X12	12	12	0.7/1.0	0.066/0.092
	60	60	6.0	1.800	CL14.4X38	14.4	38	3.0	0.585
JL75X75	75	75	2.0	0.758	CL15X12	15	12	2.0	0.206
JL80X30	80	30	3.0	0.850	CL15X15	15	15	0.8	0.010
JL80X50	80	50	4.0	1.361	CL15X22	15	22	0.6	0.082
JL80X80	80	80	3.5/8.0	1.733/3.233	CL15X24	15	24	1.5	0.206
JL100X25	100	25	3.0	0.950	CL15X25	15	25	2.0	0.275
JL100X100	100	100	2.5	1.333	CL15X31.5	15	31.5	2.4	0.367
					CL15X38	15	38	2.0	0.345
					CL19X25	19	25	0.8	0.133
					CL20X9	20	9	1.0	0.010
					CL20X20	20	20	0.8	0.140
					CL20X26	20	26	2.0	0.335
					CL20X90	20	90	1.2	0.413
					CL20X149.6	20	149.6	1.1	0.556
					CL22X14	22	14	2.0	0.242
					CL30X20	30	20	0.8	0.200
					CL30X40	30	40	3.5	0.873
					CL30X98.8	30	98.8	1.2	0.500
					CL30X149.6	30	149.6	1.1	0.616
					CL33X33	33	33	3.0	0.748
					CL40X20	40	20	0.8/1.0	0.170/0.200

[illegible]

					Name	A (mm)	B (mm)	T (mm)	Weight(kg/m)
					FG30X20	30	20	0.8/1.0	0.209/0.260
						30	20	1.2/1.5	0.308/0.350
						30	20	2.0	0.497
					FG30X25	30	25	0.7/0.8	0.203/0.231
						30	25	0.9/1.0	0.259/0.287
					FG30X30	30	30	0.8/1.0	0.253/0.316
30	30	1.5/2.0	0.450/0.617						
30	30	3.0	0.875						
Name	A (mm)	B (mm)	T (mm)	Weight(kg/m)	FG34X20	34	20	2.0	0.540
FG10X5	10	5	1.2	0.082	FG38X25	38	25	0.8/1.0	0.266/0.330
FG12X12	12	12	1.0	0.110		38	25	1.2/1.5	0.393/0.486
FG15X5	15	5	0.7	0.071		38	25	1.8/2.0	0.578/0.608
FG15X15	15	15	1.0	0.412	FG40X10	40	10	1.0/1.2	0.242/0.309
FG16X16	16	16	1.4	0.220	FG40X15	40	15	0.8/1.2	0.233/0.341
FG19X19	19	19	1.2	0.231	FG40X20	40	20	0.7/0.8	0.220/0.253
FG20X10	20	10	0.8/1.0	0.120/0.150		40	20	1.0/1.2	0.314/0.374
FG20X12	20	12	0.9/1.0	0.147/0.133		40	20	1.4/1.5	0.433/0.450
	20	12	1.65	0.256		40	20	2.0	0.592
FG20X15	20	15	1.5/2.0	0.270/0.367	FG40X25	40	25	1.8/2.0	0.600/0.659
FG20X20	20	20	0.8/1.0	0.166/0.206	FG40X30	40	30	1.0/1.2	0.333/0.420
	20	20	1.2/1.5	0.233/0.287		40	30	1.5/2.0	0.516/0.717
	20	20	1.65/2.0	0.327/0.389		40	30	3.0	1.083
FG22X22	22	22	1.5	0.300	FG40X40	40	40	0.9/1.0	0.380/0.425
FG25X20	25	20	2.0	0.45		40	40	1.2/1.5	0.503/0.650
FG25X25	25	25	0.6/0.7	0.159/0.184		40	40	1.9/2.0	0.782/0.833
	25	25	0.8/0.9	0.216/0.235		40	40	3.0	1.200
	25	25	1.0/1.2	0.280/0.300	FG44X44	44	44	0.8	0.374
	25	25	1.5/2.0	0.371/0.497	FG50X10	50	10	1.3	0.420
	25	25	3.0	0.715	FG50X20	50	20	1.0/1.4	0.366/0.508
	FG30X10	30	10	1.0/1.9	0.190/0.370	50	20	2.0	0.692
FG30X15	30	15	0.8/1.4	0.183/0.319	FG50X25	50	25	0.7/0.8	0.279/0.317
	30	15	1.5/2.0	0.330/0.443		50	25	0.9/1.1	0.356/0.433
						50	25	1.2/1.5	0.471/0.550
					50	25	2.0/3.0	0.833/1.111	

					Name	A (mm)	B (mm)	T (mm)	Weight(kg/m)
					FG76X25	76	25	0.7/0.8	0.377/0.430
						76	25	0.9/1.0	0.483/0.535
						76	25	1.1/1.2	0.587/0.639
						76	25	2.0	1.048
					FG76X29	76	29	1.0/1.1	0.557/0.611
						76	44	0.8/0.9	0.512/0.575
						76	44	1.0/1.1	0.638/0.700
						76	44	1.15/1.2	0.731/0.762
					FG76X44	76	44	1.4/1.5	0.886/0.948
						76	44	2.0/2.5	1.253/1.552
						76	44	2.8/3.0	1.730/1.867
						76	76	1.0/1.2	0.810/0.970
					FG76X76	76	76	1.5/2.0	1.125/1.617
						80	20	1.2	0.630
					FG80X20	80	25	0.8/0.9	0.447/0.502
						80	25	1.0/1.3	0.557/0.719
					FG80X25	80	30	1.5/2.0	0.830/1.130
						80	40	1.5	0.920
					FG80X40	80	44	0.8/1.0	0.529/0.659
						80	44	1.2/1.4	0.788/0.917
					FG80X44	80	44	2.0/3.0	1.296/1.912
						80	50	2.0	1.420
					FG80X50	80	60	1.2/1.5	0.885/1.116
						80	60	2.0/2.5	1.469/1.833
					FG80X60	80	60	3.1	2.240
						80	80	1.2/1.4	1.022/1.189
					FG80X80	80	80	2.0/2.1	1.685/1.767
						80	80	3.0	2.495
					FG83X83	83	83	1.2	0.584
						85	25	1.0/1.2	0.584/0.698
					FG85X25	87	67	1.2	0.983
					FG78X67				



Name	A (mm)	B (mm)	T (mm)	Weight(kg/m)	Name	A (mm)	B (mm)	T (mm)	Weight(kg/m)
YG9.8	9.8		9.8	0.203	YG57	57		4.0	1.800
YG14.8	14.8		1.4	0.159	YG60	60		1.5	0.733
YG15.8	15.8		2.0	0.234	YG70	70		1.5	0.867
YG19	19		0.8/1.2	0.142/0.181	YG76	76		3.0	0.857
	19		1.5	0.223	YG80	80		1.2	0.802
YG19.5	19.5		1.7	0.257	YG98	98		1.0	0.823
YG20	20		1.8/2.0	0.290/0.305	YG100	100		1.2	0.833
YG22	22		0.8/1.0	0.144/0.183	YG120	120		5.0	4.877
YG25	25		1.2/1.4	0.242/0.281	YG135	135		10.0	10.59
	25		1.5/1.7	0.299/0.336	YG140	140		11.0	12.04
	25		2.0	0.375	YG165	165		3.0	4.127
YG25.2	25.2		2.2	0.428	YG175	175		11.0	15.30
YG25.4	25.4		2.7	0.520	YG206	206		12.0	19.74
YG27.6	27.6		2.3	0.493					
YG28	28		2.0	0.433					
YG29.9	29.9		2.1	0.448					
YG29.8	29.8		2.3	0.535					
YG30	30		1.9/2.1	0.453/0.497					
	30		3.0	0.677					
YG32	32		2.0/2.5	0.497/0.626					
YG34	34		2.6	0.693					
YG38	38		2.5/2.9	0.742/0.863					
YG45	45		1.5	0.475					
YG50	50		1.5/3.0	0.583/1.200					
YG55	55		1.2	0.547					